



AMAZONMODULO®

luxury carpet tiles



SIRIM
Certified to : QB/T 2755 : 2005
Certification No. : PC011916




SIRIM
ECO-LABEL
Low VOC
Certified to : SIRIM ECO 035 : 2012
Certification No. : EL000212

HALFTONE

MaxLustre PP | Synth PVC Back™


FULL COLOR RANGE



M9015-1
HALFTONE GRAPHITE



M9015-2
HALFTONE GREY




M9015-3
HALFTONE SAND



M9015-4
HALFTONE KHAKI




M9015-5
HALFTONE NAVY




M9015-6
HALFTONE STONE


Recommended Laying Patterns



Quarter Turn



Ashlar




Brick


Product Specification

Fibre	MaxLustre PP
Construction	1/12" Multi-Level Loop
Pile Weight	810gm/m ² or 24oz/yd ²
Pile Height	3.0mm - 5.5mm
Total Thickness	5.0mm - 6.0mm
Backing	Synth PVC Back™


Standard Size



PP



Quarter Turn



M9015-1
HALFTONE GRAPHITE

PRODUCT SPECIFICATION

CONSTRUCTION 1/12" Multi-Level Loop

FIBRE MaxLustre PP

PILE WEIGHT 810gm/m² or 24oz/yd²



PILE HEIGHT 3.0mm - 5.5mm

TOTAL THICKNESS 5.0mm - 6.0mm

BACKING Synth PVC Back™

NO. OF TILES/ BOX 20 pcs / 54sqft (5sqm)

PP




M9015-2
HALFTONE GREY

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.0mm - 5.5mm
TOTAL THICKNESS	5.0mm - 6.0mm
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

HALFTONE


PP



Ashlar



HALFTONE




M9015-3
HALFTONE SAND


PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.0mm - 5.5mm
TOTAL THICKNESS	5.0mm - 6.0mm
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

PP



Ashlar




M9015-4
HALFTONE KHAKI


PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.0mm - 5.5mm
TOTAL THICKNESS	5.0mm - 6.0mm
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)


PP



Brick

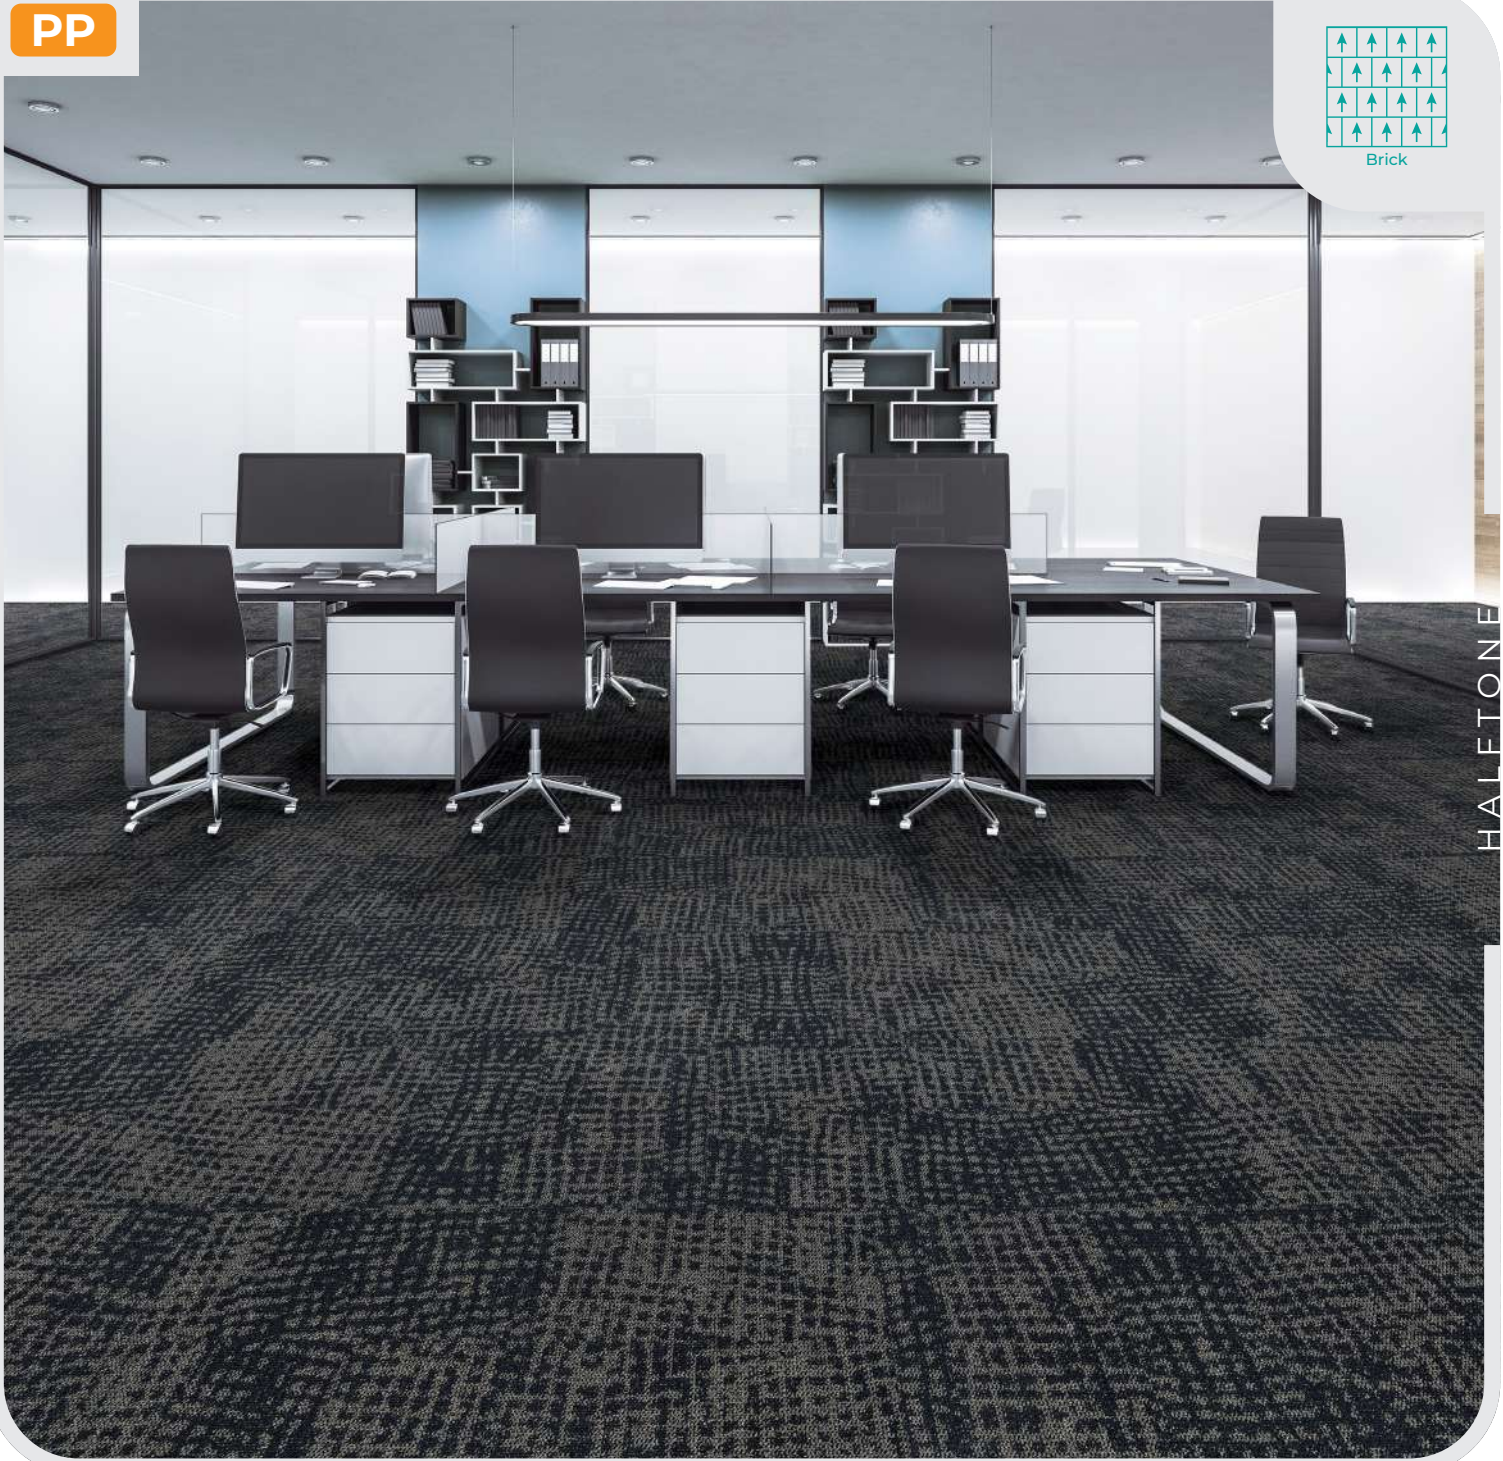

HALFTONE




M9015-5
HALFTONE NAVY

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.0mm - 5.5mm
TOTAL THICKNESS	5.0mm - 6.0mm
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)


PP



Brick



HALFTONE



M9015-6
HALFTONE STONE

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.0mm - 5.5mm
TOTAL THICKNESS	5.0mm - 6.0mm
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)



AMAZONMODULO®
luxury carpet tiles

HALFTONE

MaxLustre PP | Synth PVC Back™

PRODUCT SPECIFICATION

Construction	Multi-level loop
Fiber	MaxLustre PP
Gauge	1/12"
Pile Weight	810gm/m ² or 24oz/yd ²
Pile Height	3.0 - 5.5mm
Total Thickness	5.0 - 6.0mm
Backing	Synth PVC Back™
Tile Size	50cm x 50cm
Package	20pcs / 54sqft (5m ²)

ENVIRONMENTAL SPECIFICATION

Sustainability	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
----------------	--

PERFORMANCE SPECIFICATION

TVOCs	Green Guard AQS Report no. 903193-13/ CRI Green Label Plus - <0.5mg/m²/hour
Flammability	ASTM-D-2859-96 / FF 1-70 / 16 CFR 1630 - Pass 8/8
Flooring Radiant Panel	ASTM-E-648-15e1 - 29.2%
Static Propensity	AATCC-134-2011 - 0.2 kV
Color Fastness	AATCC-165 - 5/5
Stain Resistance	AATCC-175-2003 - Result: 10
Dimensional Stability	ASTM-D7570(AACHEN/ISO2551) - <0.15%
Smoke Density	ASTM-E-662-15a - Ds(1.5)≤100 and Ds(4.0)≤200
Roll Chair	ITTS-205 - 3.0
Tuft Bind	ASTM-D-1335 - 7.1lbs
Pilling & Fuzzing	ITTS 002 - 5/5



Certified to: QB1 2755:2005
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212



PRODUCT CERTIFIED FOR
LOW VOC EMISSIONS
(USGBC)



Indoor Air Quality
Assessment Testing Program
carpet-nub.org

