



# AMAZONMODULO®

luxury carpet tiles



**SIRIM**  
Certified to: QB/T 2755 : 2005  
Certification No.: PC011916



**SIRIM**  
ECO-LABEL  
Low VOC  
Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212

# HALO

MaxLustre PP | BioFlex Bitumen Back™

## FULL COLOR RANGE



M14-01 HALO DARK



M14-02 HALO GREY



M14-03 HALO CAFÉ




M14-05 HALO STEEL

### Recommended Laying Patterns



Herringbone




Ashlar

### Product Specification

<b>Fibre</b>	MaxLustre PP
<b>Construction</b>	1/12" Multi-Level Loop
<b>Pile Weight</b>	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>Pile Height</b>	3.5mm - 4.5mm
<b>Total Thickness</b>	6.0mm (±0.5mm)
<b>Backing</b>	BioFlex Bitumen Back™

### Standard Size

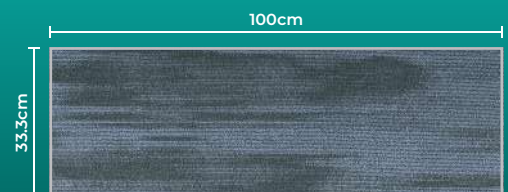


PP



Herringbone



HALO

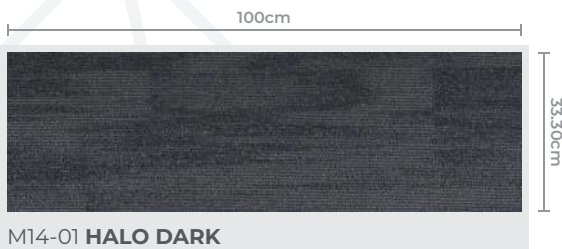

M14-01 HALO DARK


## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/12" Multi-Level Loop
<b>FIBRE</b>	MaxLustre PP
<b>PILE WEIGHT</b>	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	3.5mm - 4.5mm
<b>TOTAL THICKNESS</b>	6.0mm (±0.5mm)
<b>BACKING</b>	BioFlex Bitumen Back™
<b>NO. OF TILES/ BOX</b>	15 pcs / 54sqft (5sqm)

PP



**AMAZONMODULO®**  
luxury carpet tiles

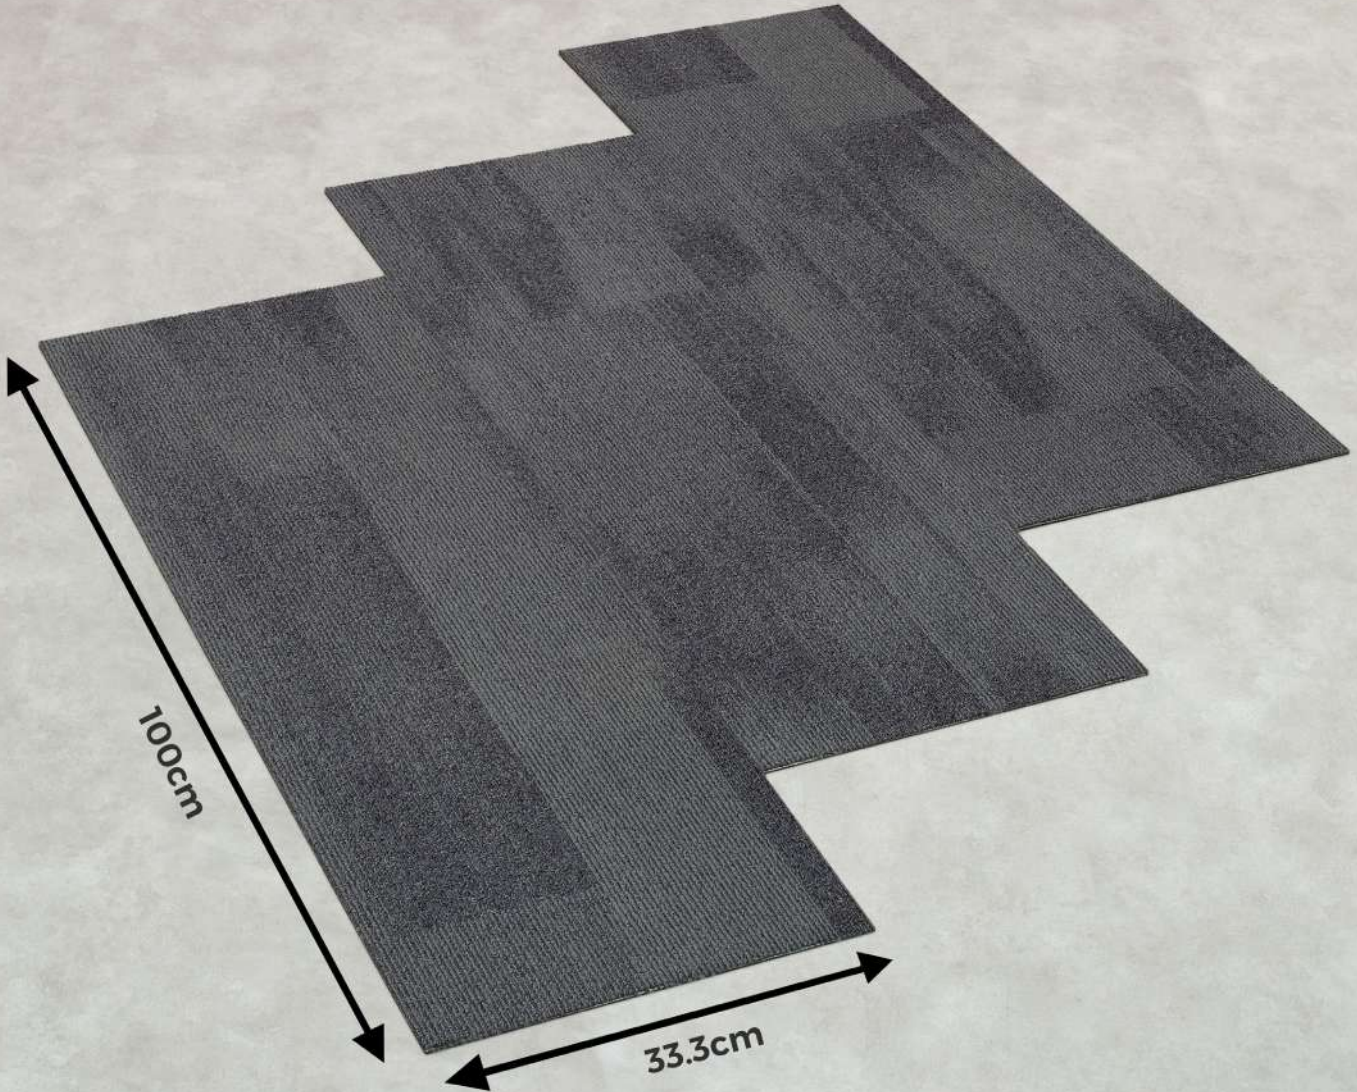

HALO ▶ M14-01 halo dark




M14-01 HALO DARK

## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/12" Multi-Level Loop
<b>FIBRE</b>	MaxLustre PP
<b>PILE WEIGHT</b>	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	3.5mm - 4.5mm
<b>TOTAL THICKNESS</b>	6.0mm (±0.5mm)
<b>BACKING</b>	BioFlex Bitumen Back™
<b>NO. OF TILES/ BOX</b>	15 pcs / 54sqft (5sqm)

PP



Ashlar



M14-02 HALO GREY

## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/12" Multi-Level Loop

**FIBRE** MaxLustre PP

**PILE WEIGHT** 750gm/m<sup>2</sup> or 22oz/yd<sup>2</sup>

**PILE HEIGHT** 3.5mm - 4.5mm

**TOTAL THICKNESS** 6.0mm (±0.5mm)


**BACKING** BioFlex Bitumen Back™

**NO. OF TILES/ BOX** 15 pcs / 54sqft (5sqm)

PP



**AMAZONMODULO®**  
luxury carpet tiles

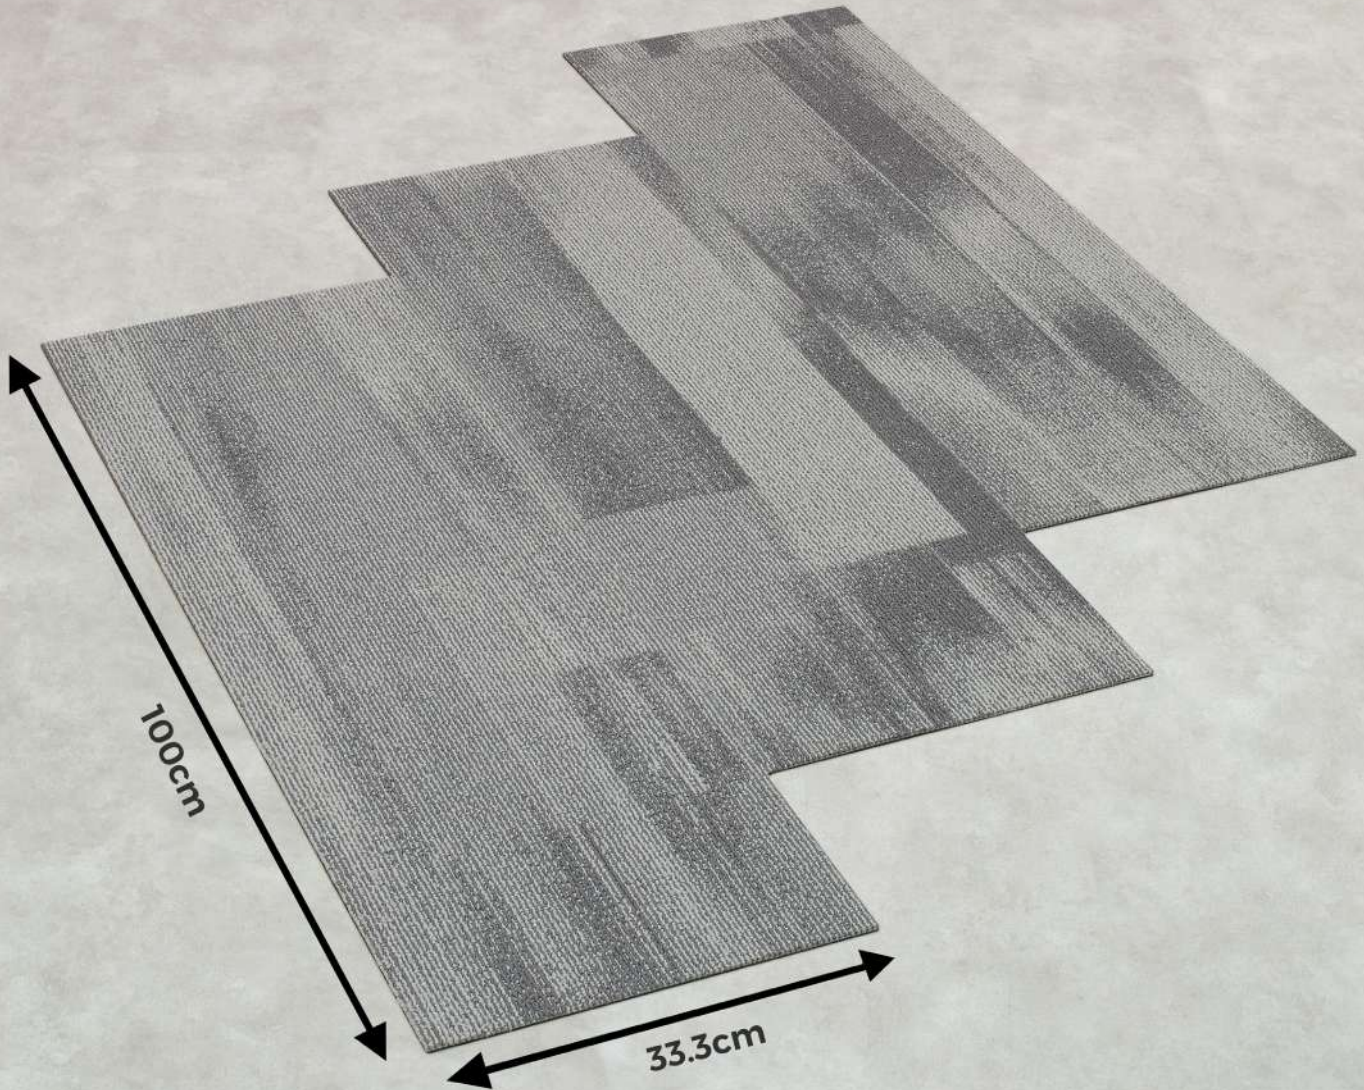

HALO ▶ M14-02 halo grey




M14-02 HALO GREY

## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/12" Multi-Level Loop
<b>FIBRE</b>	MaxLustre PP
<b>PILE WEIGHT</b>	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	3.5mm - 4.5mm
<b>TOTAL THICKNESS</b>	6.0mm (±0.5mm)
<b>BACKING</b>	BioFlex Bitumen Back™
<b>NO. OF TILES/ BOX</b>	15 pcs / 54sqft (5sqm)

PP

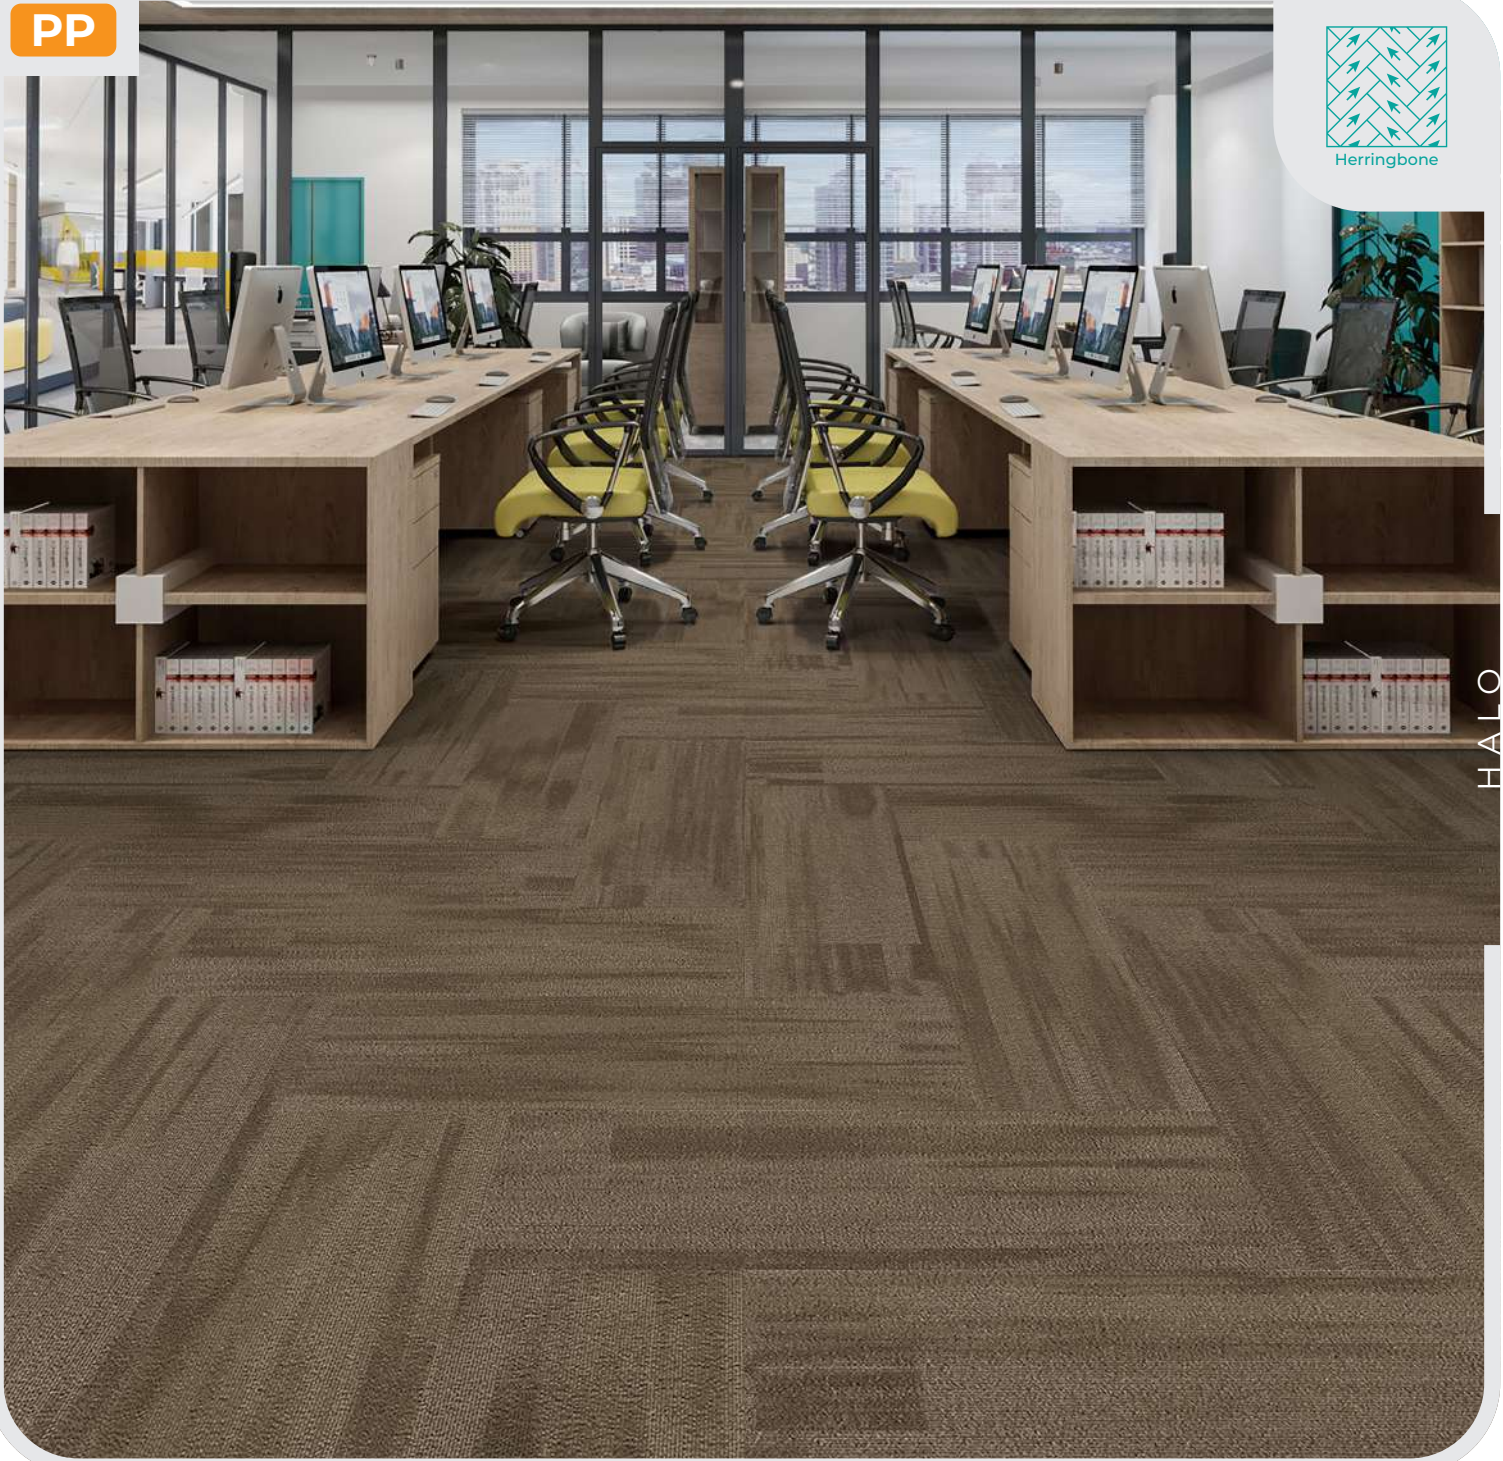

M14-03 HALO CAFÉ


## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/12" Multi-Level Loop
<b>FIBRE</b>	MaxLustre PP
<b>PILE WEIGHT</b>	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	3.5mm - 4.5mm
<b>TOTAL THICKNESS</b>	6.0mm (±0.5mm)
<b>BACKING</b>	BioFlex Bitumen Back™
<b>NO. OF TILES/ BOX</b>	15 pcs / 54sqft (5sqm)

PP



**AMAZONMODULO®**  
luxury carpet tiles

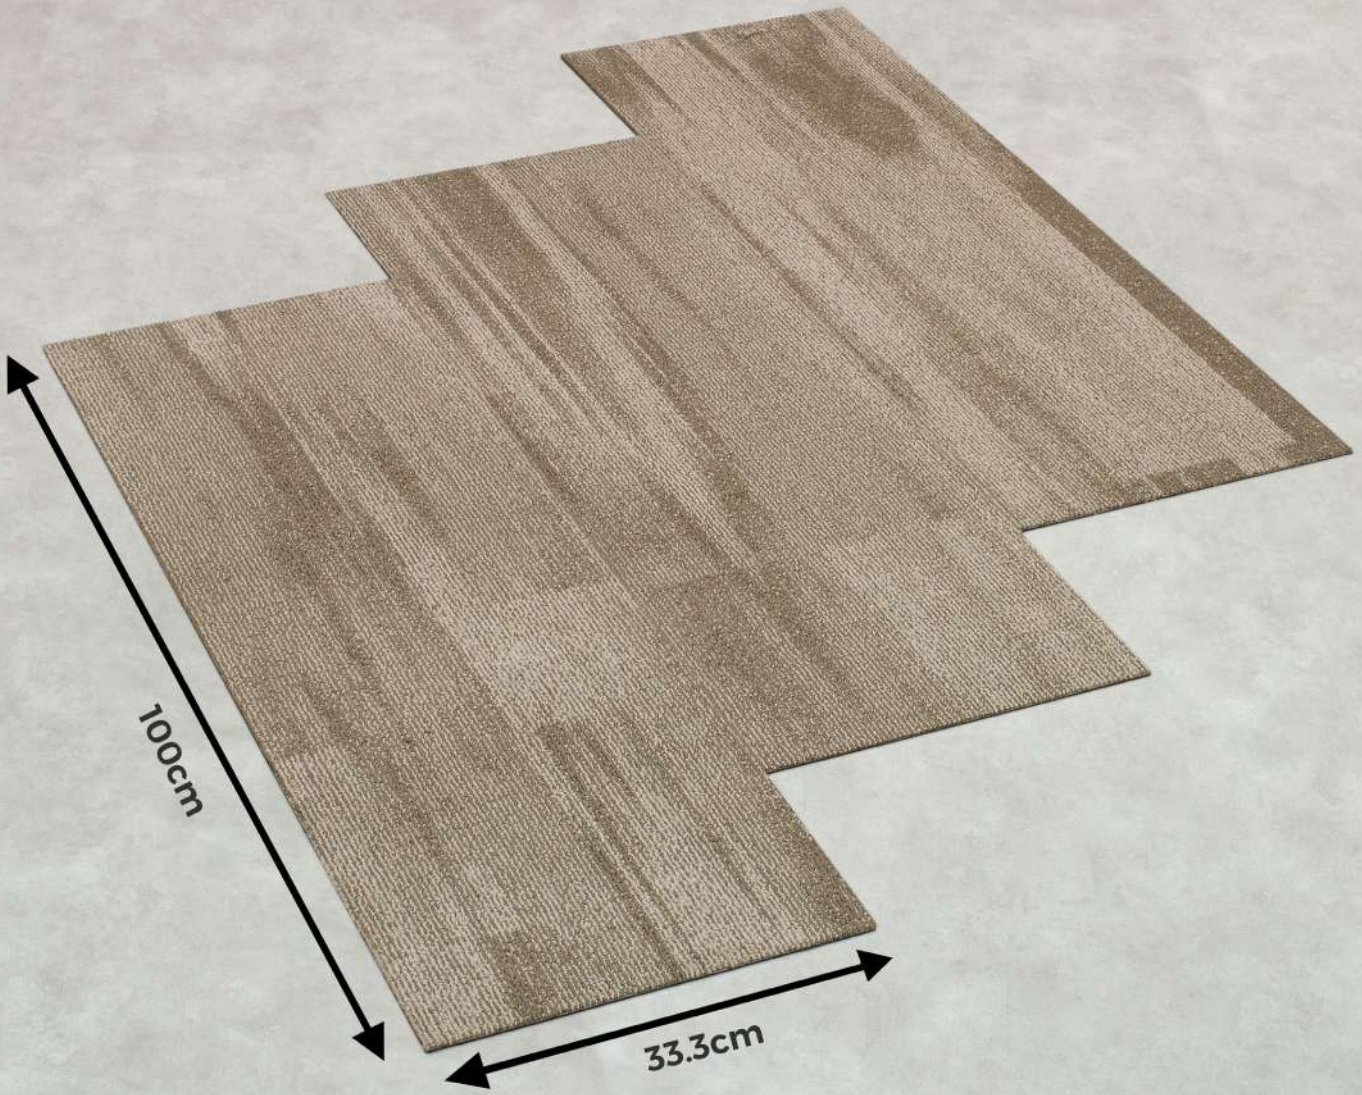

HALO ▶ M14-03 halo café




M14-03 HALO CAFÉ

**PRODUCT SPECIFICATION**

<b>CONSTRUCTION</b>	1/12" Multi-Level Loop
<b>FIBRE</b>	MaxLustre PP
<b>PILE WEIGHT</b>	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	3.5mm - 4.5mm
<b>TOTAL THICKNESS</b>	6.0mm (±0.5mm)
<b>BACKING</b>	BioFlex Bitumen Back™
<b>NO. OF TILES/ BOX</b>	15 pcs / 54sqft (5sqm)

PP



Ashlar



M14-05 HALO STEEL


## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/12" Multi-Level Loop
<b>FIBRE</b>	MaxLustre PP
<b>PILE WEIGHT</b>	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	3.5mm - 4.5mm
<b>TOTAL THICKNESS</b>	6.0mm (±0.5mm)
<b>BACKING</b>	BioFlex Bitumen Back™
<b>NO. OF TILES/ BOX</b>	15 pcs / 54sqft (5sqm)

PP



**AMAZONMODULO®**  
luxury carpet tiles

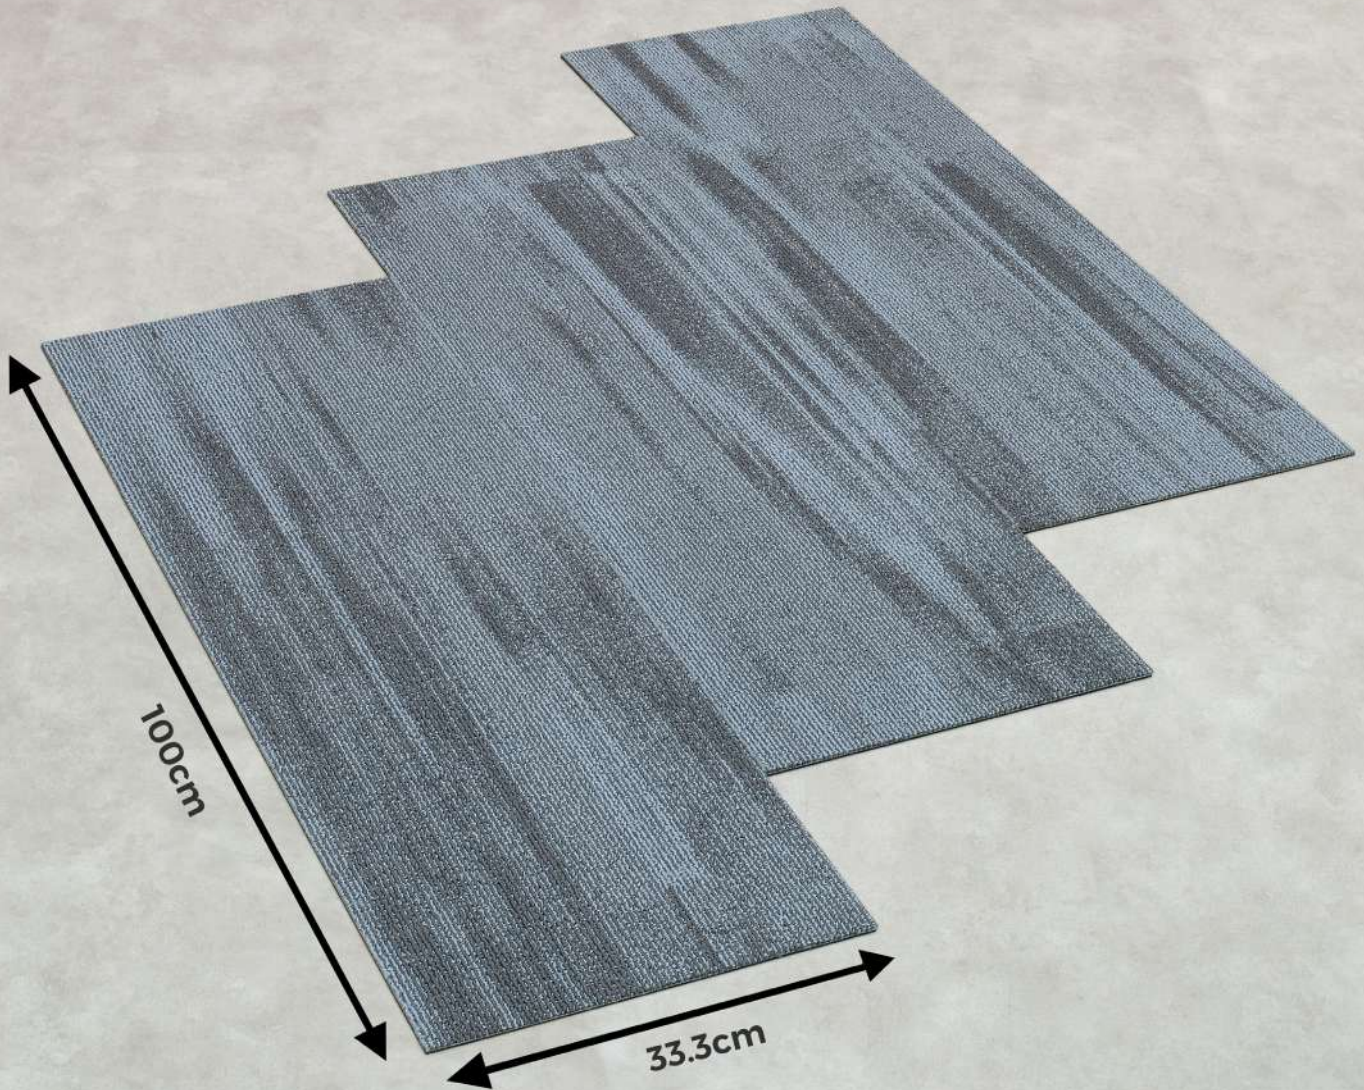

**HALO ▶ M14-05 halo steel**



M14-05 HALO STEEL

**PRODUCT SPECIFICATION**

<b>CONSTRUCTION</b>	1/12" Multi-Level Loop
<b>FIBRE</b>	MaxLustre PP
<b>PILE WEIGHT</b>	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	3.5mm - 4.5mm
<b>TOTAL THICKNESS</b>	6.0mm (±0.5mm)
<b>BACKING</b>	BioFlex Bitumen Back™
<b>NO. OF TILES/ BOX</b>	15 pcs / 54sqft (5sqm)



**AMAZONMODULO®**  
luxury carpet tiles

# HALO

MaxLustre PP | BioFlex Bitumen Back™

## PRODUCT SPECIFICATION

Construction	Multi-level Loop
Fiber	MaxLustre PP
Gauge	1/12"
Pile Weight	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
Pile Height	3.5mm - 4.5mm
Total Thickness	6.0mm (±0.5mm)
Backing	BioFlex Bitumen Back™
Tile Size	33.30cm x 100cm
Package	15pcs / 54sqft (5m <sup>2</sup> )

## PERFORMANCE SPECIFICATION

TVOCs	Green Guard AQS Report no. 903193-13/ CRI Green Label Plus - <b>&lt;0.5mg/m<sup>2</sup>/hour</b>
Flammability	ASTM-D-2859-96 / FF 1-70 / 16 CFR 1630 - <b>Pass 8/8</b>
Flooring Radiant Panel	ASTM-E-648-15e1 - <b>29.2%</b>
Static Propensity	AATCC-134-2011 - <b>0.2 kV</b>
Color Fastness	AATCC-165 - <b>5/5</b>
Stain Resistance	AATCC-175-2003 - <b>Result: 10</b>
Dimensional Stability	ASTM-D7570(AACHEN/ISO2551) - <b>&lt;0.15%</b>
Smoke Density	ASTM-E-662-15a - <b>Ds(1.5)≤100 and Ds(4.0)≤200</b>
Roll Chair	ITTS-205 - <b>3.0</b>
Tuft Bind	ASTM-D-1335 - <b>7.1lbs</b>
Pilling & Fuzzing	ITTS 002 - <b>5/5</b>



SIRIM  
Certified to: QB1 2735:2005  
Certification No.: PK011916



SIRIM  
ECO LABEL  
Low VOC  
Certified to: SIRIM ECO 035:2012  
Certification No.: EL000212



GREENGUARD  
PRODUCT CERTIFIED FOR  
ENVIRONMENTAL SENSITIVE  
APPLICATIONS  
(UL 2898)



CRI  
GREEN LABEL  
+PLUS  
Indoor Air Quality  
Assessment Accredited Program  
carpet-nub.org

