



AMAZONMODULO®

luxury carpet tiles



SIRIM
Certified to: GB/T 2955 : 2005
Certification No.: PC011916



SIRIM
ECO-LABEL
Low VOC
Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212

ILLUMINA

MaxLustre PP | Synth PVC Back™

FULL COLOR RANGE



M13-01 ILLUMINA STEEL



M13-02 ILLUMINA GREY



M13-03 ILLUMINA CAFÉ




M13-05 ILLUMINA NAVY

Recommended Laying Patterns



Herringbone




Ashlar

Product Specification

Fibre	MaxLustre PP
Construction	1/12" Multi-Level Loop
Pile Weight	750gm/m ² or 22oz/yd ²
Pile Height	3.5mm - 4.5mm
Total Thickness	6.0mm (±0.5mm)
Backing	Synth PVC Back™

Standard Size

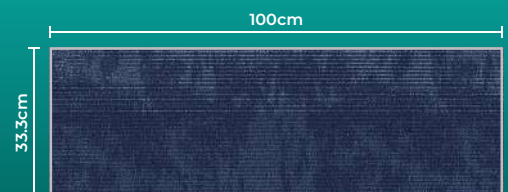

PP




PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	750gm/m ² or 22oz/yd ²
PILE HEIGHT	3.5mm - 4.5mm
TOTAL THICKNESS	6.0mm (±0.5mm)
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)

PP



AMAZONMODULO®
luxury carpet tiles

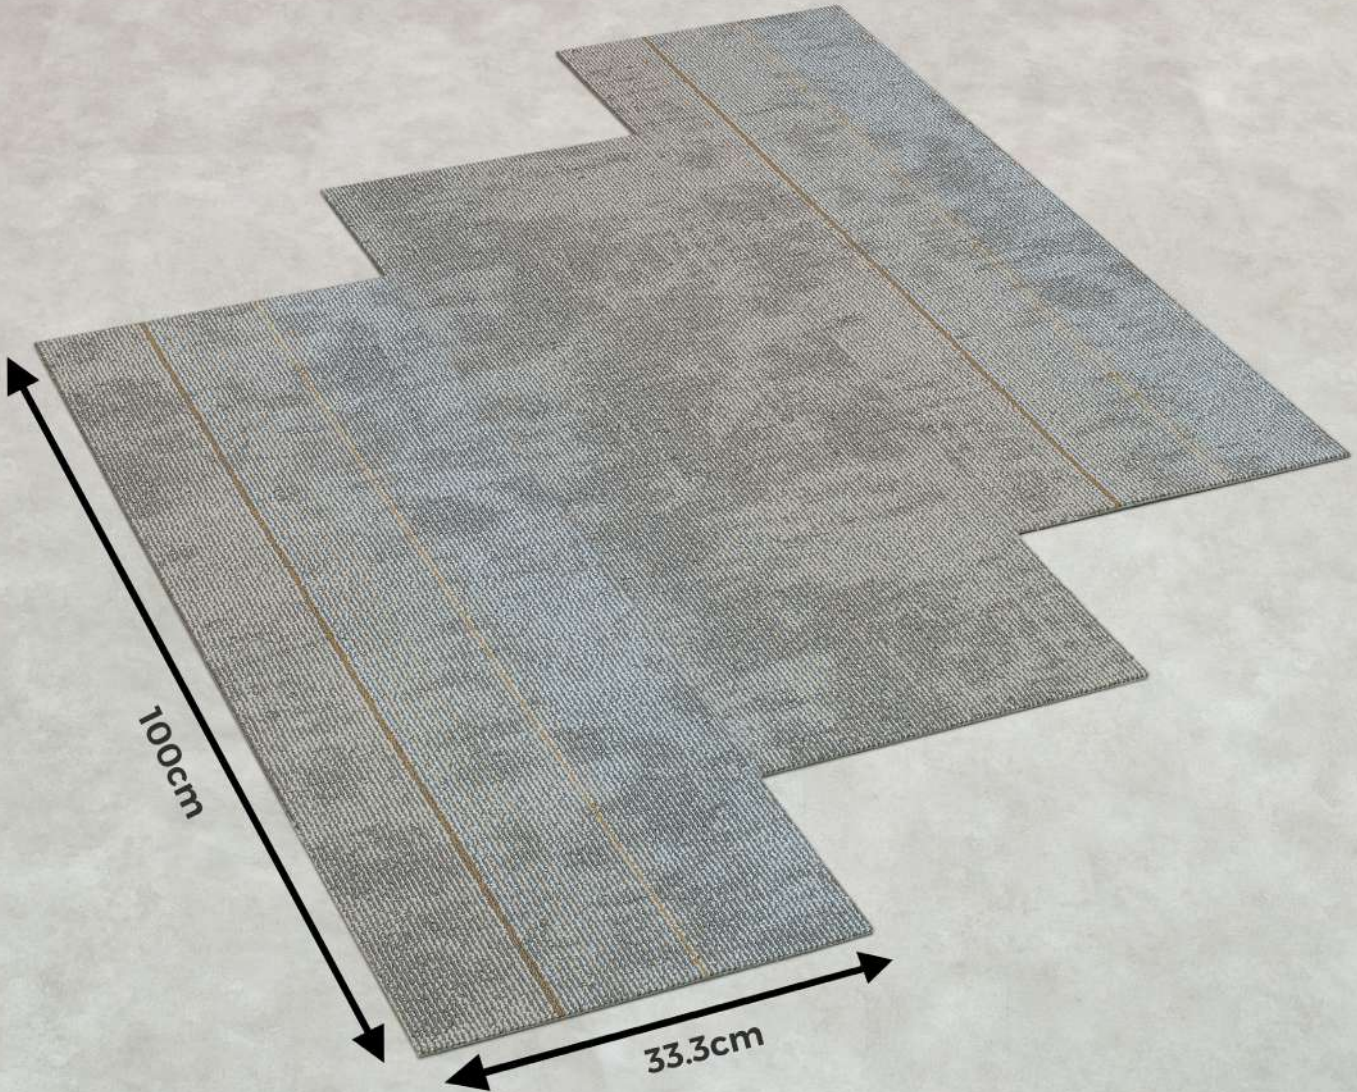

ILLUMINA ▶ M13-01 illumina steel




M13-01 ILLUMINA STEEL

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	750gm/m ² or 22oz/yd ²
PILE HEIGHT	3.5mm - 4.5mm
TOTAL THICKNESS	6.0mm (±0.5mm)
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)

PP



Ashlar



ILLUMINA



M13-02 ILLUMINA GREY


PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	750gm/m ² or 22oz/yd ²
PILE HEIGHT	3.5mm - 4.5mm
TOTAL THICKNESS	6.0mm (±0.5mm)
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)

PP



AMAZONMODULO®
luxury carpet tiles

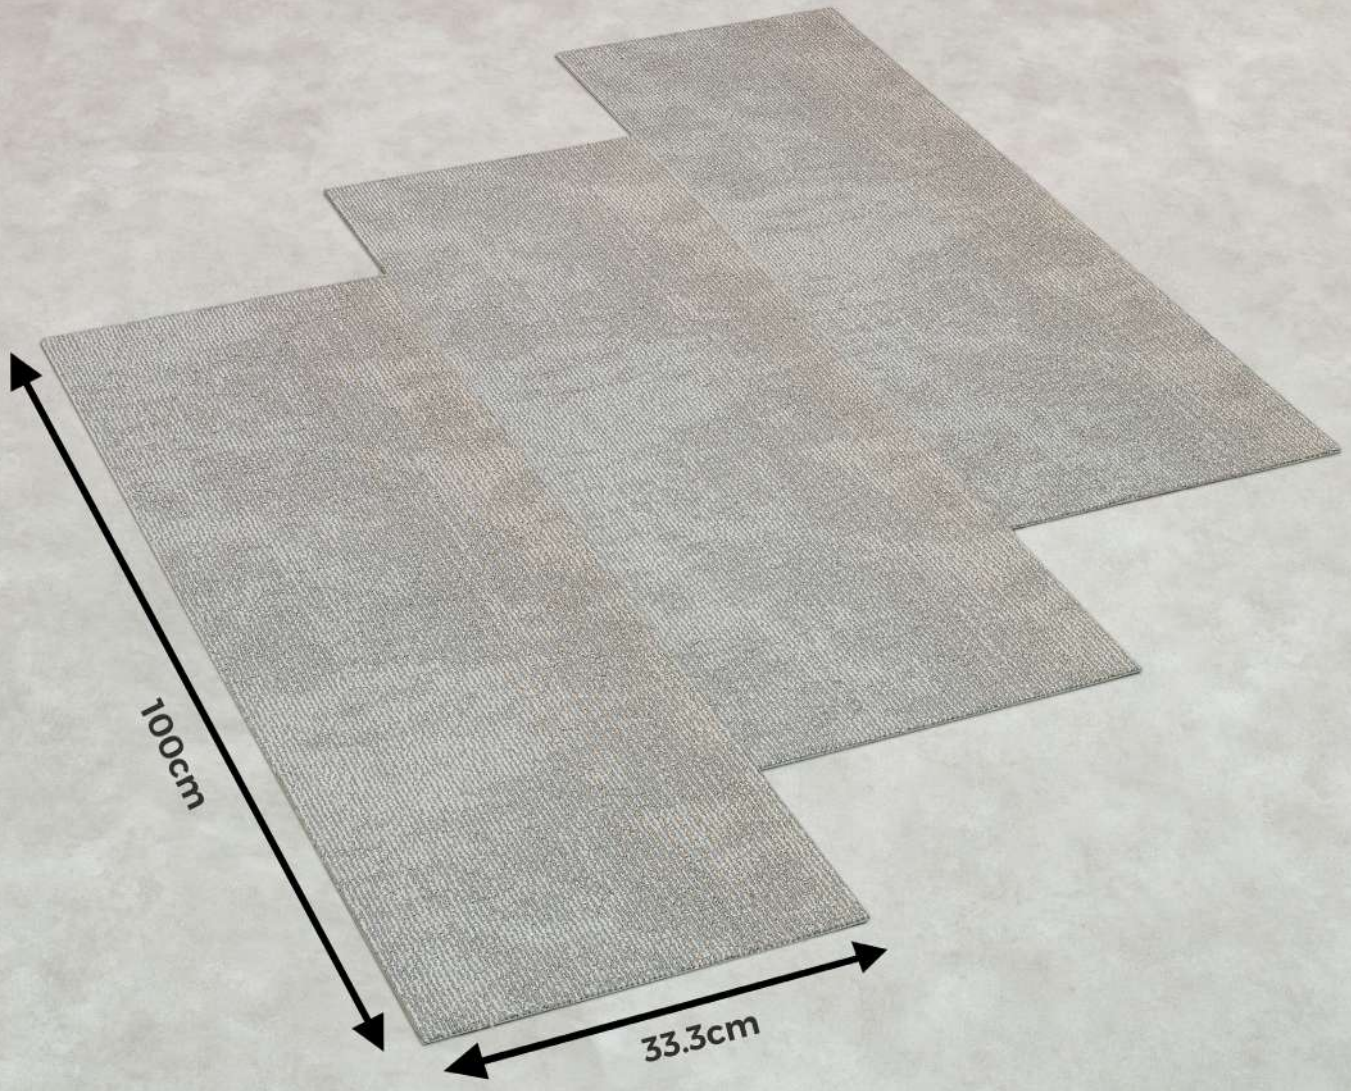

ILLUMINA ▶ M13-02 illumina grey




M13-02 ILLUMINA GREY

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	750gm/m ² or 22oz/yd ²
PILE HEIGHT	3.5mm - 4.5mm
TOTAL THICKNESS	6.0mm (±0.5mm)
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)

PP




M13-03 ILLUMINA CAFÉ


PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	750gm/m ² or 22oz/yd ²
PILE HEIGHT	3.5mm - 4.5mm
TOTAL THICKNESS	6.0mm (±0.5mm)
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)

PP



AMAZONMODULO[®]
luxury carpet tiles

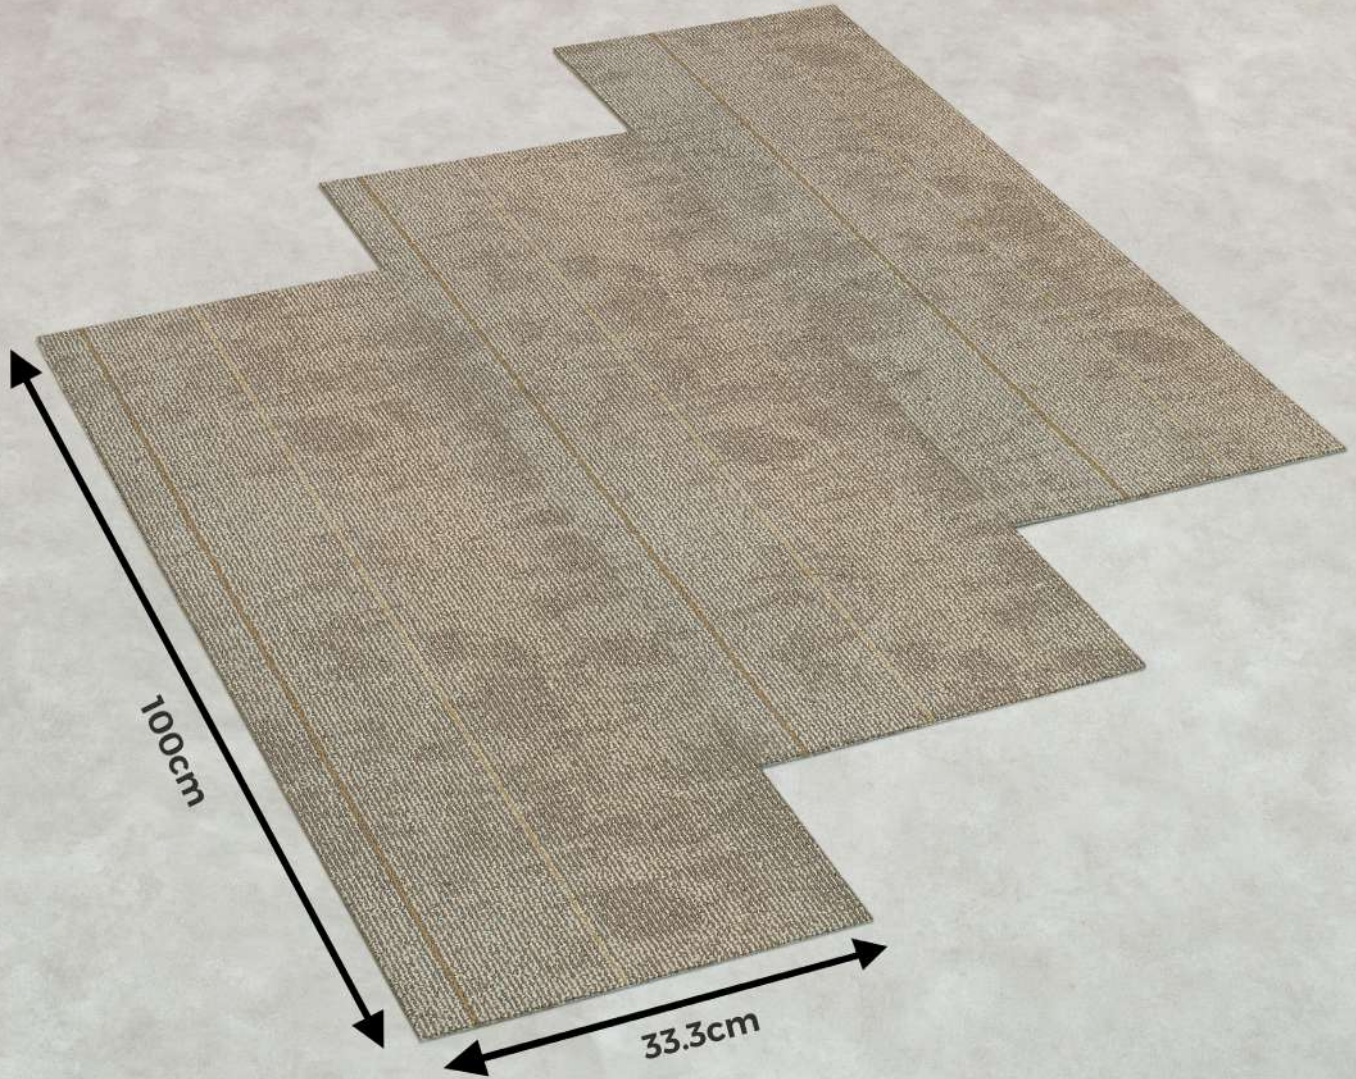

ILLUMINA ▶ M13-03 illumina café





M13-03 ILLUMINA CAFÉ

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	750gm/m ² or 22oz/yd ²
PILE HEIGHT	3.5mm - 4.5mm
TOTAL THICKNESS	6.0mm (±0.5mm)
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)

PP

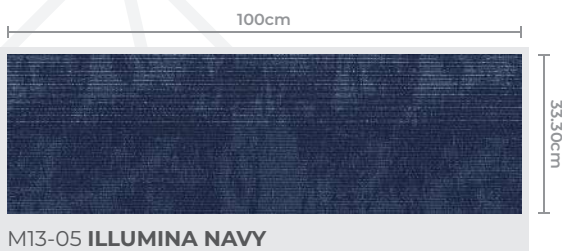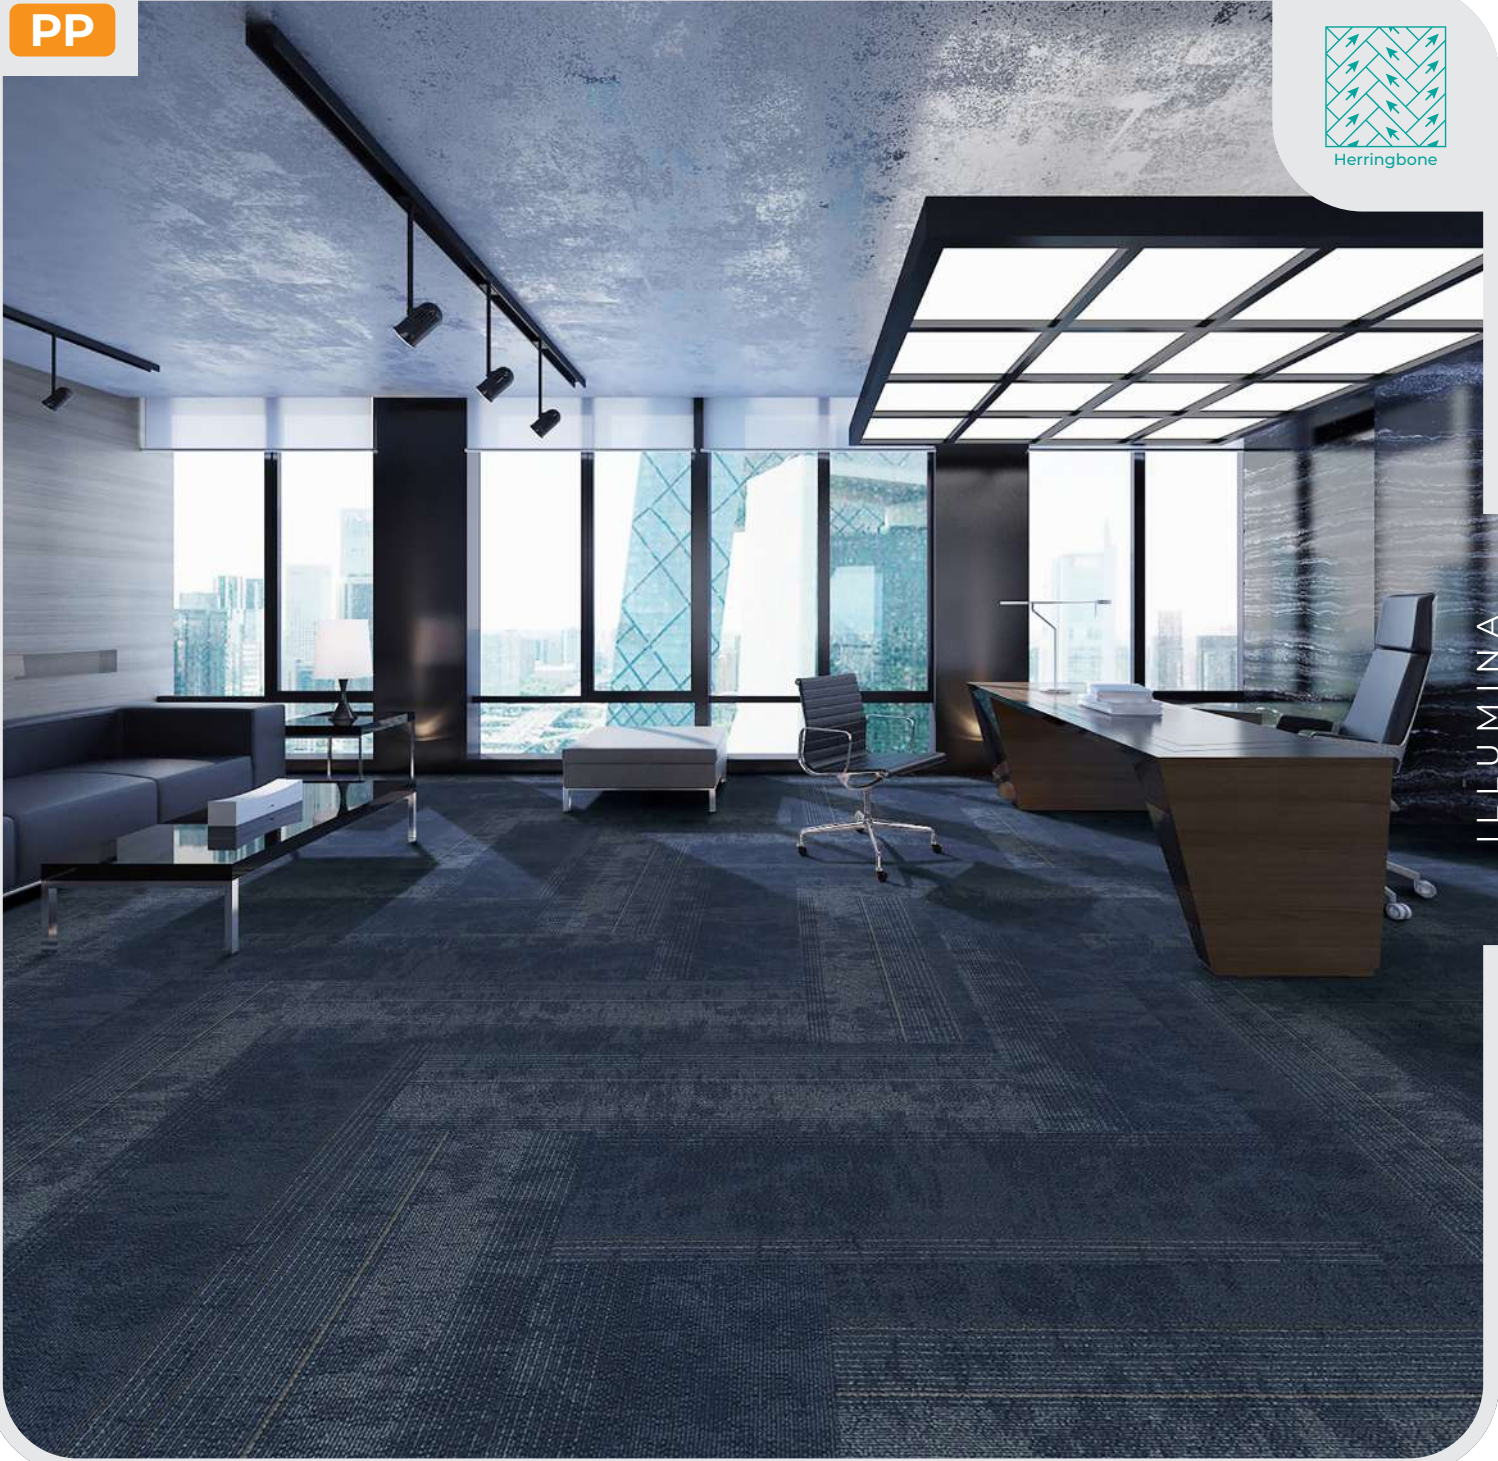


PRODUCT SPECIFICATION


CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	750gm/m ² or 22oz/yd ²
PILE HEIGHT	3.5mm - 4.5mm
TOTAL THICKNESS	6.0mm (±0.5mm)
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)

PP

AMAZONMODULO®
luxury carpet tiles

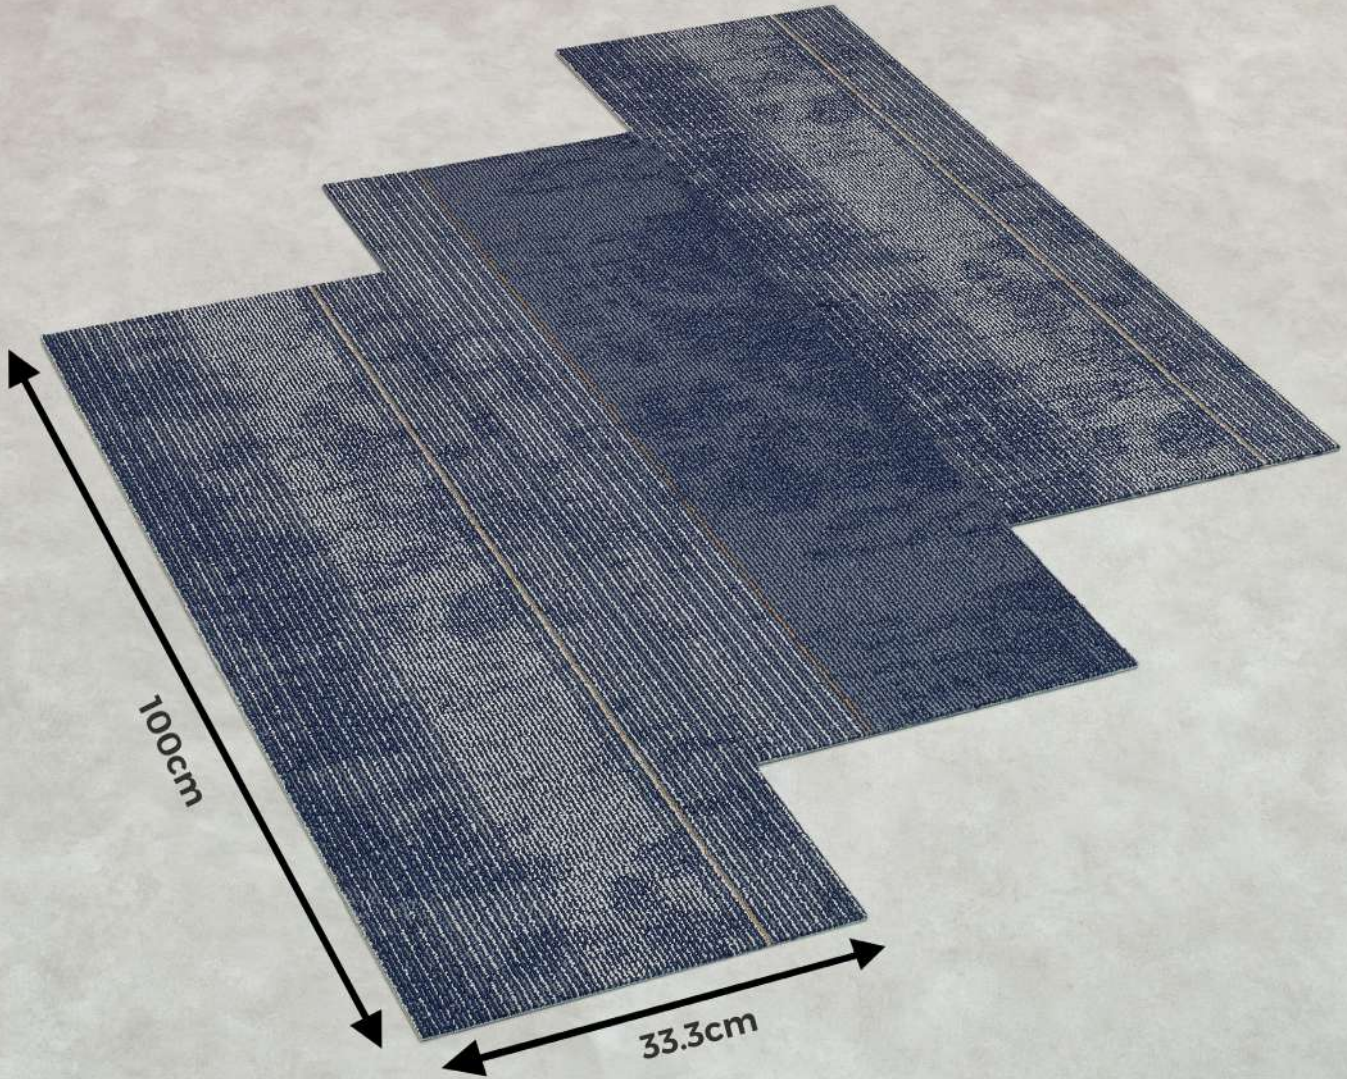

ILLUMINA ▶ M13-05 illumina navy

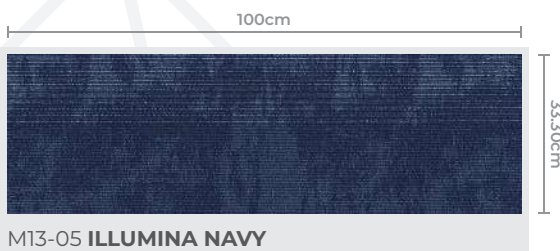

M13-05 ILLUMINA NAVY

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	750gm/m ² or 22oz/yd ²
PILE HEIGHT	3.5mm - 4.5mm
TOTAL THICKNESS	6.0mm (±0.5mm)
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)



ILLUMINA

MaxLustre PP | Synth PVC Back™

PRODUCT SPECIFICATION

Construction	Multi-level Loop
Fiber	MaxLustre PP
Gauge	1/12"
Pile Weight	750gm/m ² or 22oz/yd ²
Pile Height	3.5mm - 4.5mm
Total Thickness	6.0mm (±0.5mm)
Backing	Synth PVC Back™
Tile Size	33.30cm x 100cm
Package	15pcs / 54sqft (5m ²)

PERFORMANCE SPECIFICATION

TVOCs	Green Guard AQS Report no. 903193-13/ CRI Green Label Plus - <0.5mg/m²/hour
Flammability	ASTM-D-2859-96 / FF 1-70 / 16 CFR 1630 - Pass 8/8
Flooring Radiant Panel	ASTM-E-648-15e1 - 29.2%
Static Propensity	AATCC-134-2011 - 0.2 kV
Color Fastness	AATCC-165 - 5/5
Stain Resistance	AATCC-175-2003 - Result: 10
Dimensional Stability	ASTM-D7570(AACHEN/ISO2551) - <0.15%
Smoke Density	ASTM-E-662-15a - Ds(1.5)≤100 and Ds(4.0)≤200
Roll Chair	ITTS-205 - 3.0
Tuft Bind	ASTM-D-1335 - 7.1lbs
Pilling & Fuzzing	ITTS 002 - 5/5



Certified to: Q817:2005
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212



PRODUCT CERTIFIED FOR
ENVIRONMENTAL SENSITIVE
APPLICATIONS



Indoor Air Quality
Assessment Testing Program

