



AMAZONPRIMO[®]
contract carpet tiles



SIRIM
Certified to: QB/T 2955 : 2005
Certification No.: PC011916




SIRIM
ECO-LABEL
Low VOC
Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212


MENORCA

100% Resilia Nylon 6 | BioFlex Hush Cushion Back™

FULL COLOR RANGE

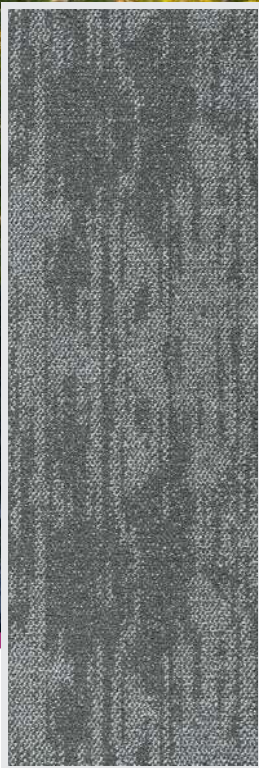


M101-1 MENORCA IRON

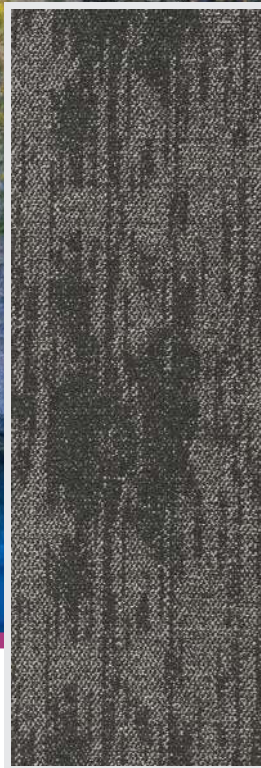

M102-1 MENORCA BLACK



M103-1 MENORCA BLUE

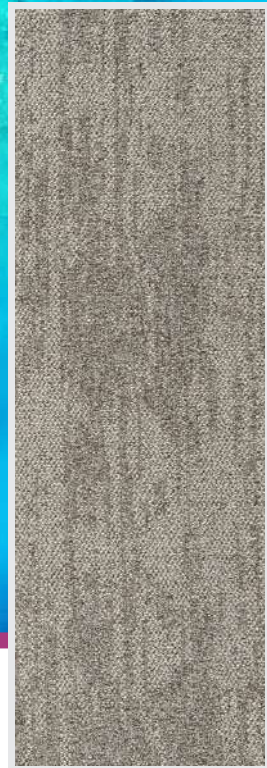


M106-1 MENORCA STEEL

Recommended Laying Patterns



Herringbone



Ashlar

Product Specification

Fibre	100% Resilia Nylon 6
Construction	1/12" (8+4) Multi-Level Loop
Pile Weight	810gm/m ² or 24oz/yd ²
Pile Height	3.5 - 4.5mm
Total Thickness	9.0mm
Backing	BioFlex Hush Cushion Back™


Standard Size



NY



Herringbone

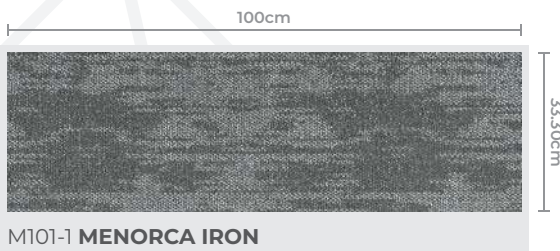

M101-1 MENORCA IRON

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" (8+4) Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.5 - 4.5mm
TOTAL THICKNESS	9.0mm
BACKING	BioFlex Hush Cushion Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)



AMAZONPRIMO®
contract carpet tiles


MENORCA

100% Resilia Nylon 6 | BioFlex Hush Cushion Back™

NY




AMAZONPRIMO®
contract carpet tiles

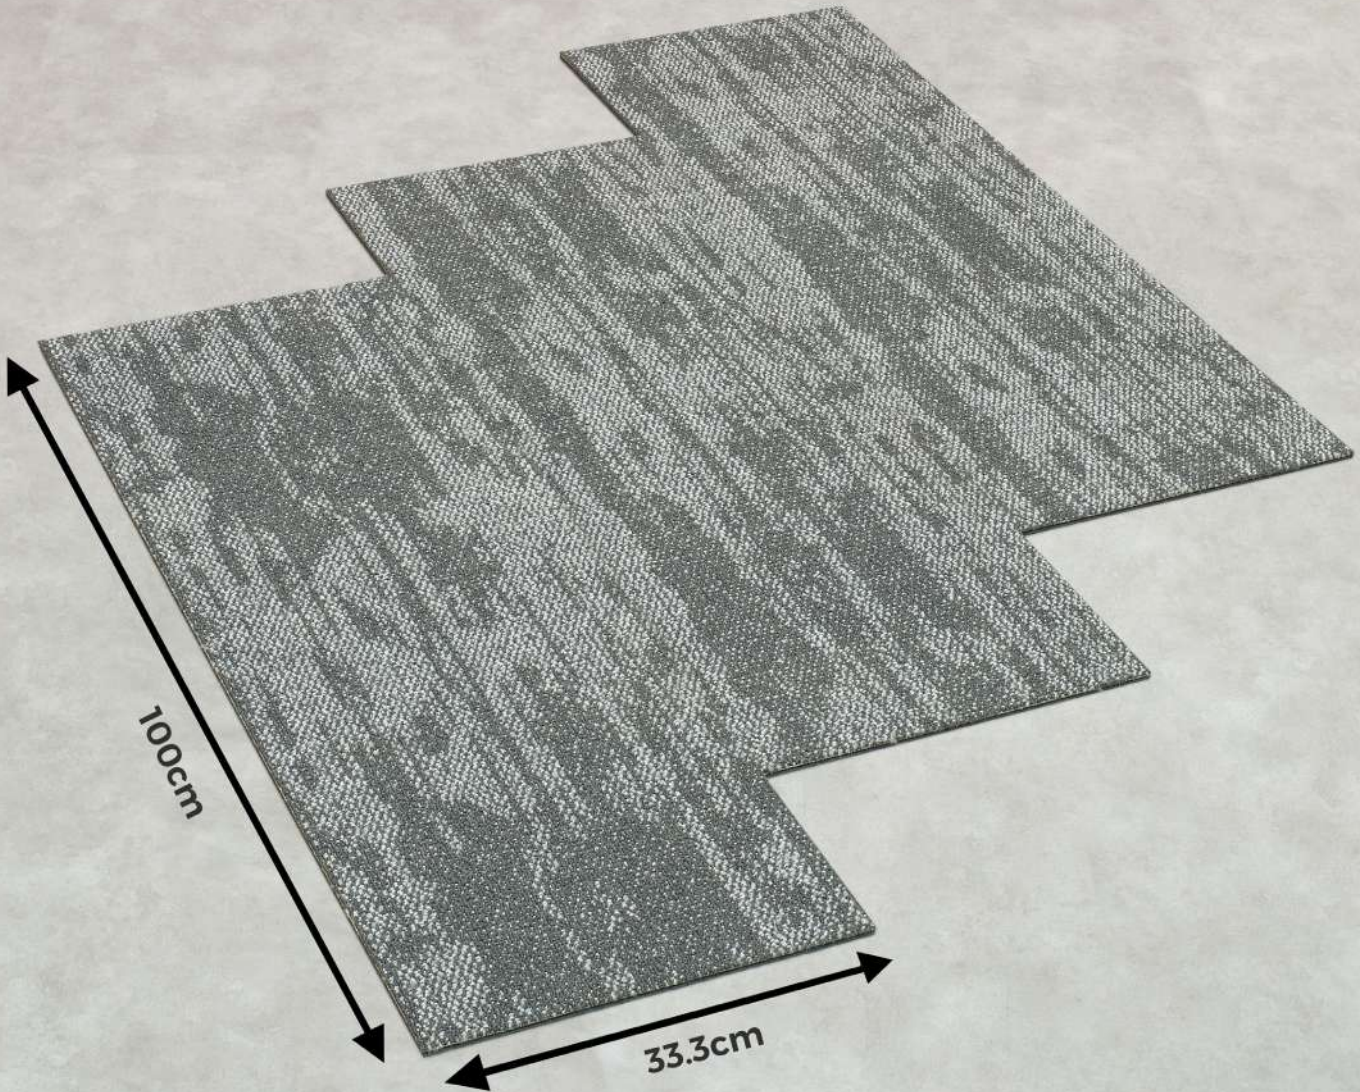

MENORCA

MENORCA ▶ M101-1 menorca iron

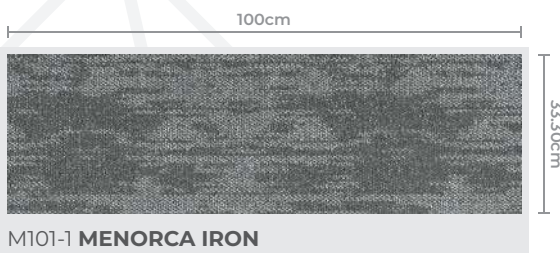

M101-1 MENORCA IRON

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" (8+4) Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.5 - 4.5mm
TOTAL THICKNESS	9.0mm
BACKING	BioFlex Hush Cushion Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)




AMAZONPRIMO[®]
contract carpet tiles


MENORCA

100% Resilia Nylon 6 | BioFlex Hush Cushion Back™

NY



MENORCA

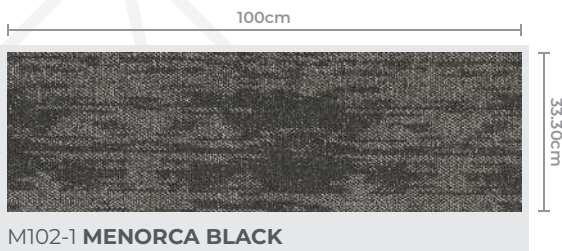

M102-1 MENORCA BLACK


PRODUCT SPECIFICATION

CONSTRUCTION	1/12" (8+4) Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.5 - 4.5mm
TOTAL THICKNESS	9.0mm
BACKING	BioFlex Hush Cushion Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)

NY



AMAZONPRIMO[®]
contract carpet tiles

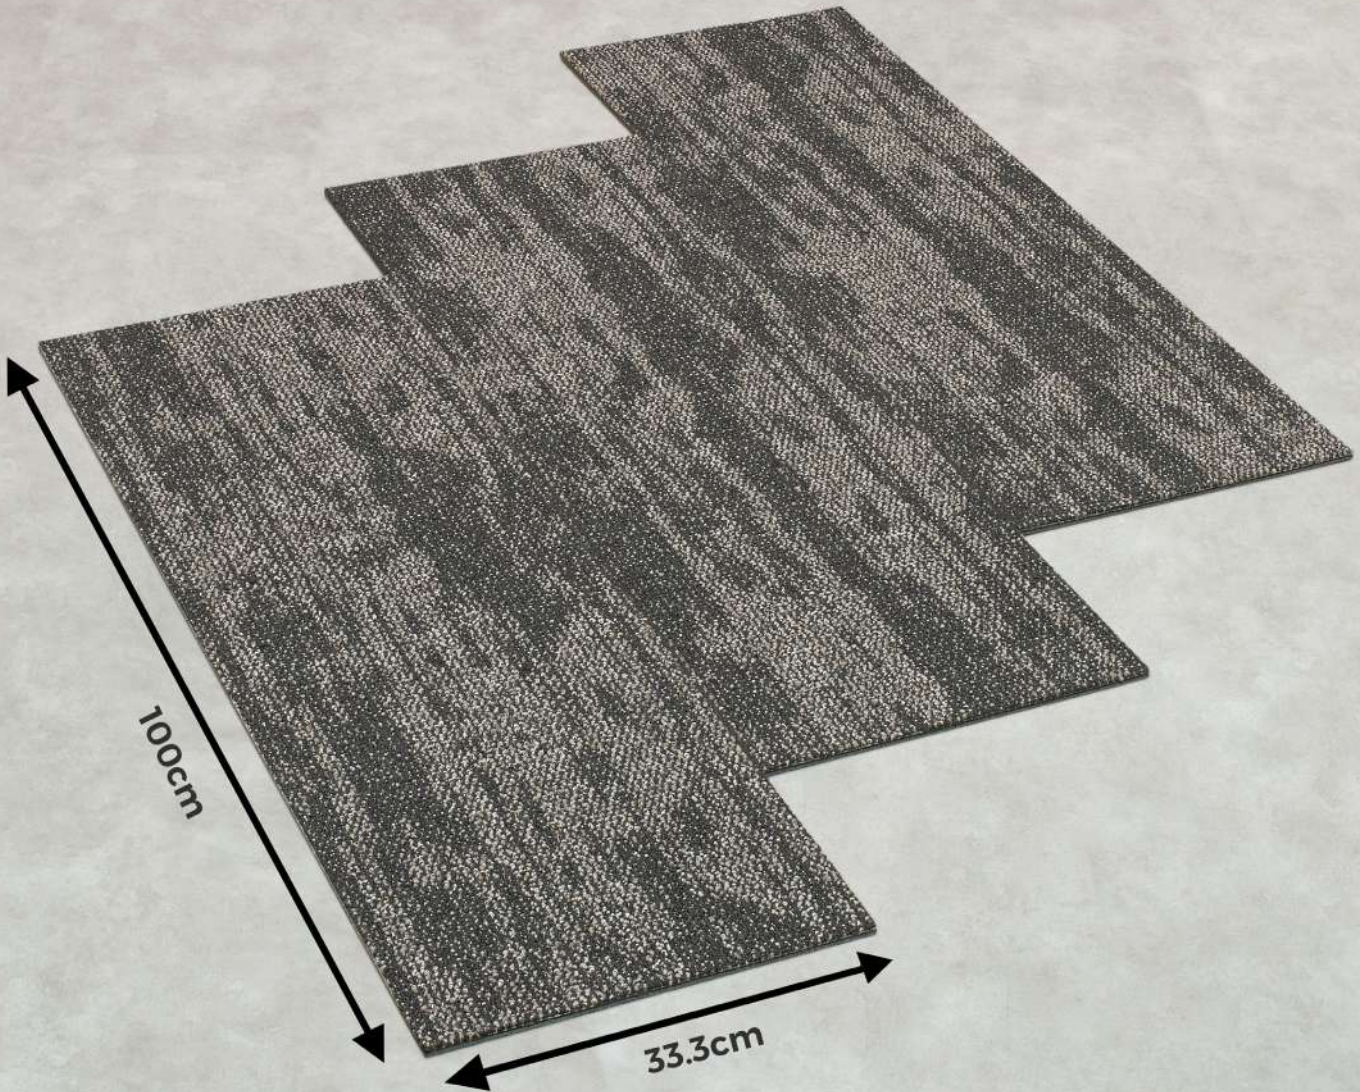

MENORCA ▶ M102-1 menorca black




M102-1 MENORCA BLACK

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" (8+4) Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.5 - 4.5mm
TOTAL THICKNESS	9.0mm
BACKING	BioFlex Hush Cushion Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)

MENORCA


NY

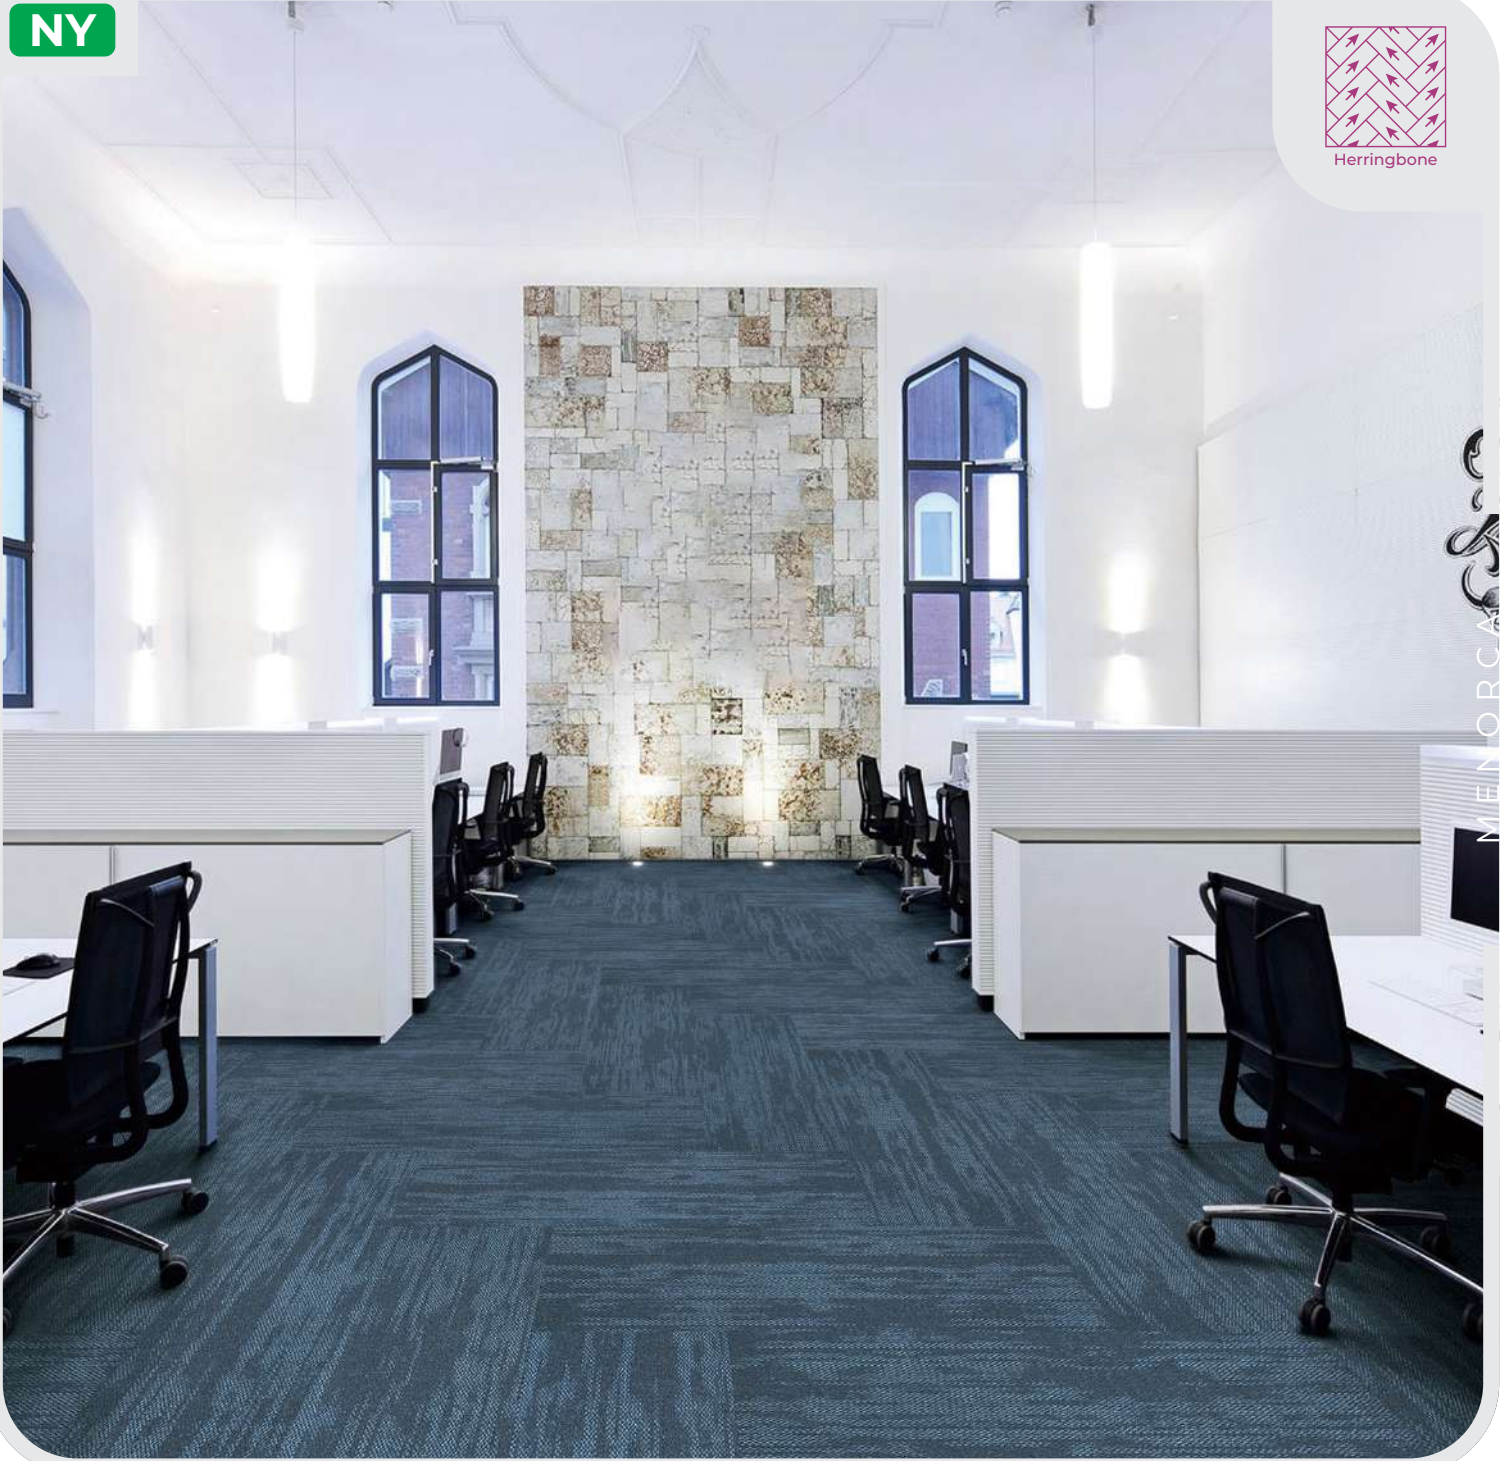

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" (8+4) Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.5 - 4.5mm
TOTAL THICKNESS	9.0mm
BACKING	BioFlex Hush Cushion Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)

NY

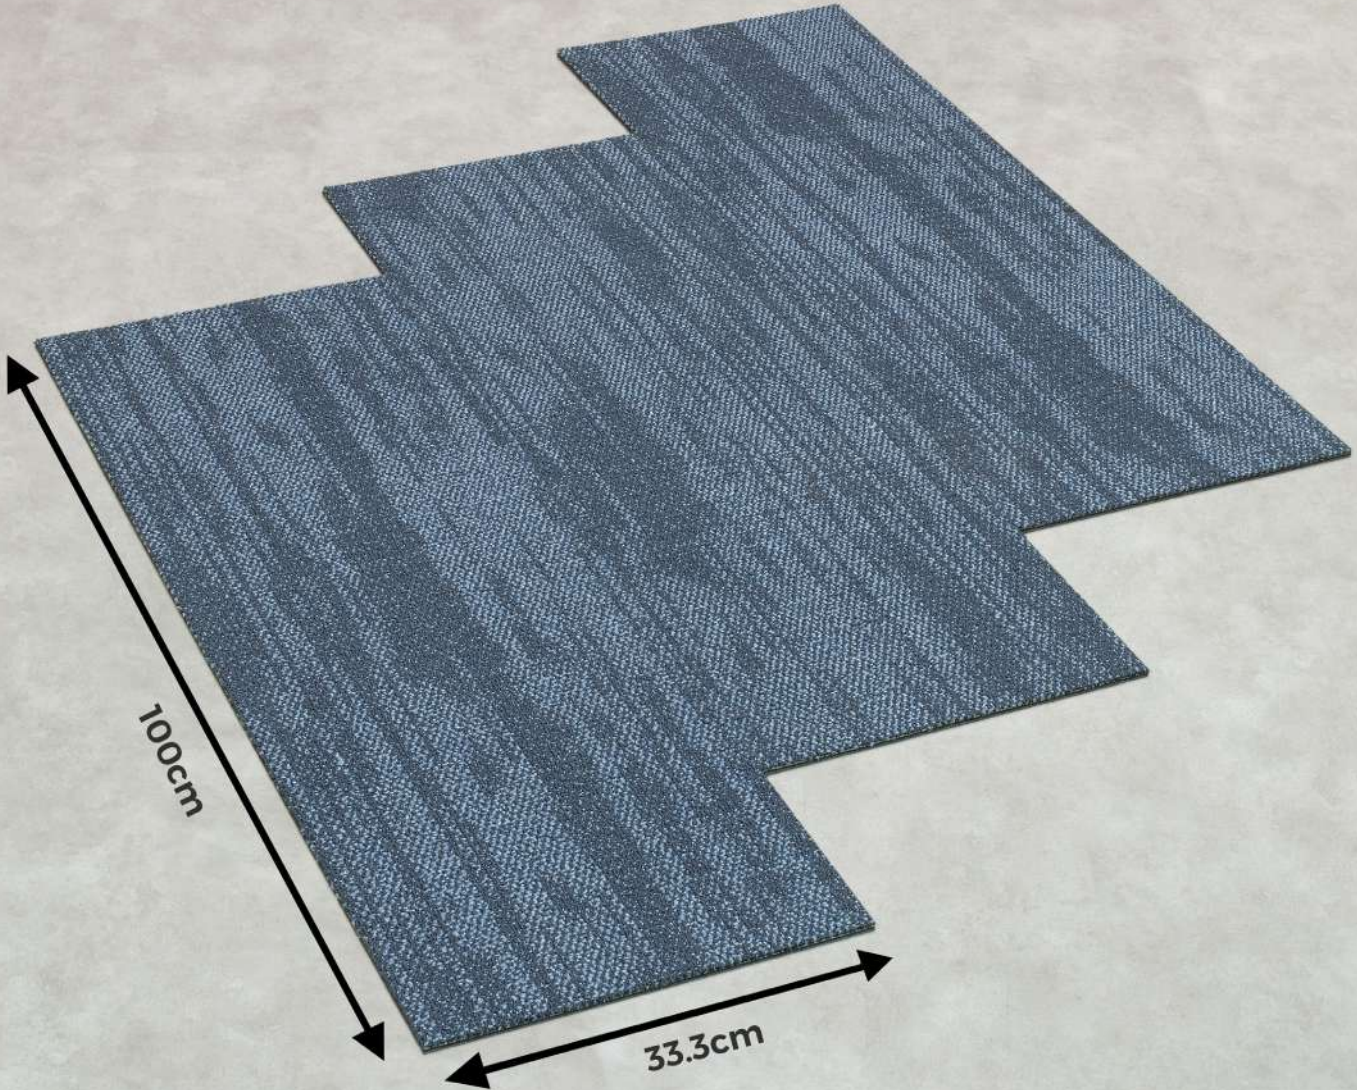

MENORCA

MENORCA ▶ M103-1 menorca blue



PRODUCT SPECIFICATION

CONSTRUCTION	1/12" (8+4) Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.5 - 4.5mm
TOTAL THICKNESS	9.0mm
BACKING	BioFlex Hush Cushion Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)




AMAZONPRIMO®
contract carpet tiles

MENORCA

100% Resilia Nylon 6 | BioFlex Hush Cushion Back™

NY




MENORCA




PRODUCT SPECIFICATION

CONSTRUCTION	1/12" (8+4) Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.5 - 4.5mm
TOTAL THICKNESS	9.0mm
BACKING	BioFlex Hush Cushion Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)

NY



AMAZONPRIMO[®]
contract carpet tiles

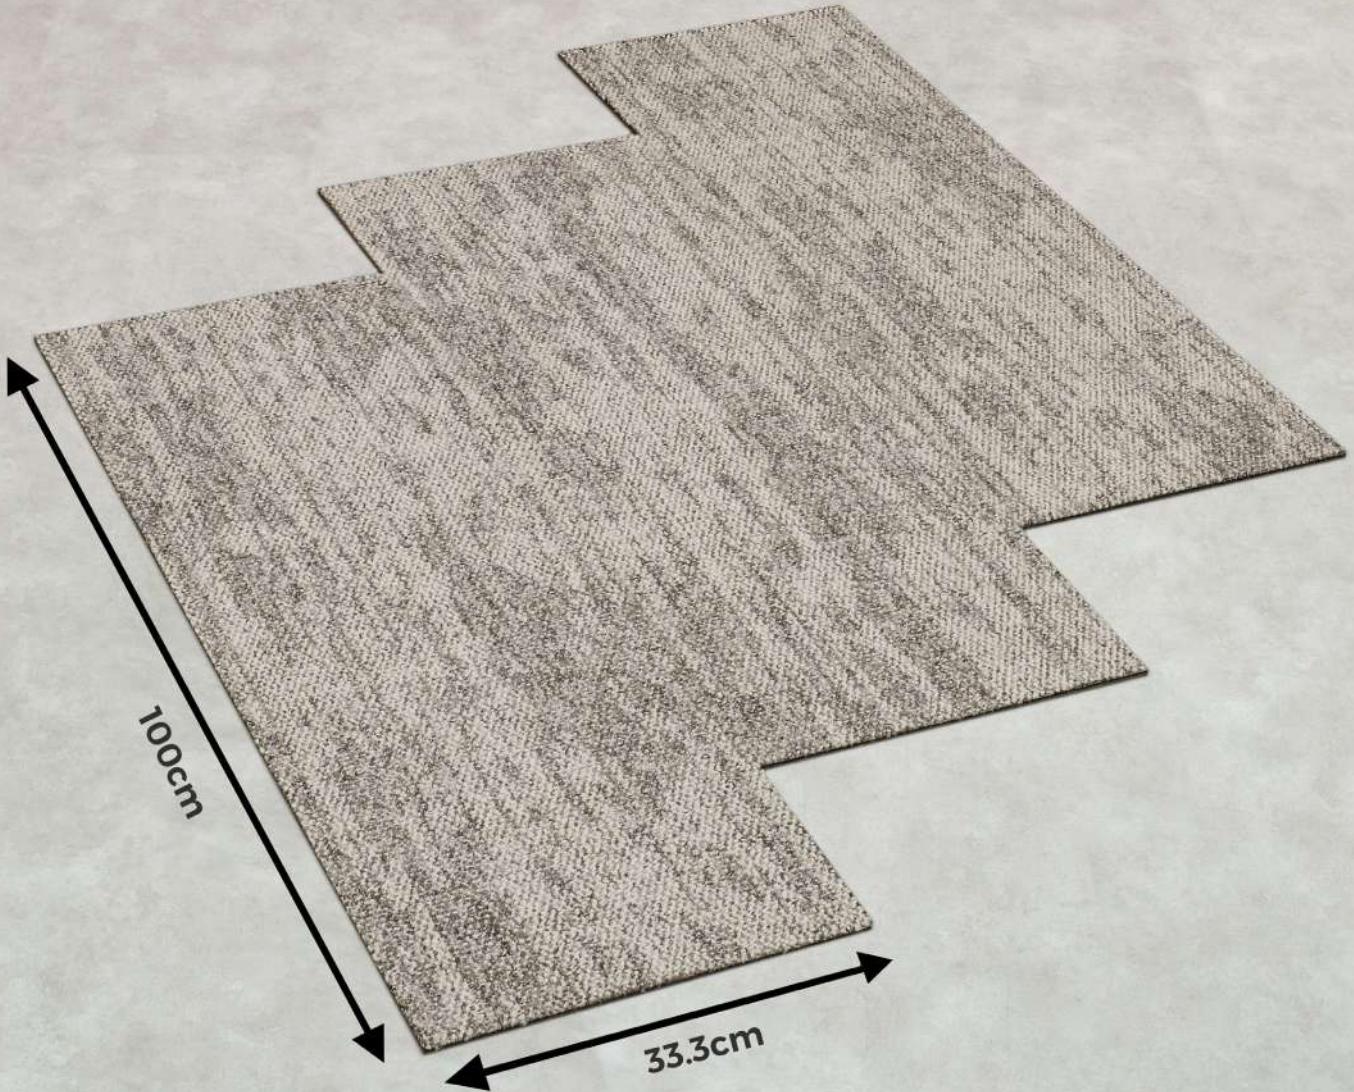

MENORCA

MENORCA ▶ M106-1 menorca steel



M106-1 MENORCA STEEL

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" (8+4) Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.5 - 4.5mm
TOTAL THICKNESS	9.0mm
BACKING	BioFlex Hush Cushion Back™
NO. OF TILES/ BOX	15 pcs / 54sqft (5sqm)



AMAZONPRIMO[®]
contract carpet tiles

MENORCA

100% Resilia Nylon 6 | BioFlex Hush Cushion Back™

PRODUCT SPECIFICATION

Construction	Multi-level Loop
Fiber	100% Resilia Nylon 6
Gauge	1/12" (8+4)
Pile Weight	810gm/m ² or 24oz/yd ²
Pile Height	3.5 - 4.5mm
Total Thickness	9.0mm
Backing	BioFlex Hush Cushion Back™
Tile Size	33.30cm x 100cm
Package	15pcs / 54sqft (5m ²)

ENVIRONMENTAL SPECIFICATION

Total Recycled Content	30% post-consumer recycled material
Indoor Air Quality	CRI Green Label PLUS, Greenguard
End-of-life Recycling	Reloop Initiative
Environmental Quality System	ISO14001:2004

PERFORMANCE SPECIFICATION

Flammability	ASTM-D-2859-96 / FF 1-70 / 16 CFR 1630 - Pass 8/8
Flooring Radiant Panel	ASTM-E-648-15e1 - 2.3%
Static Propensity	AATCC-134-2011 - 0.3 kV
Color Fastness	AATCC-165 - 5 5
Stain Resistance	AATCC-175-2003 - 7
Sound Absorption	ASTM-C423-09a - 0.13 Sabins/ft²
Dimensional Stability	ASTM-D7570(AACHEN/ISO2551) - <0.15%
Smoke Density	ASTM-E-662-15a - Ds(1.5)≤100 and Ds(4.0)≤200
Roll Chair	ITTS-205 - 3.0
Tuft Bind	ASTM-D-1335 - 8.5lbs
Pilling & Fuzzing	ITTS 002 - 5/5



Certified to: Q81 2755:2005
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212



PRODUCT CERTIFIED FOR
ENVIRONMENTAL PERFORMANCE
(ULFRT)



Indoor Air Quality
Assessment Testing Program
carpet-n6b.org



RESILIA
NYLON