



AMAZONESSENTIALS®
carpet tiles




SIRIM
Certified to : QB/T 2755 : 2005
Certification No. : PC011916



SIRIM
ECO-LABEL
Low VOC
Certified to : SIRIM ECO 035 : 2012
Certification No. : EL000212

THESPIAN

Stainshield PP | BioFlex Bitumen Back™

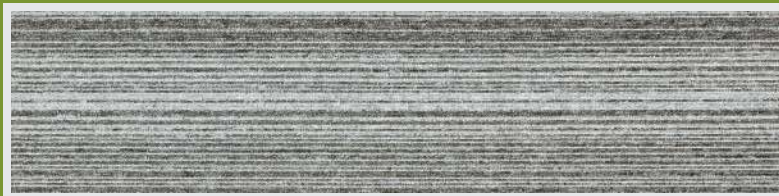


ES23-04 GENESIS

Recommended Laying Patterns



Herringbone




Ashlar

Product Specification

| | |
|------------------------|---|
| Fibre | Stainshield PP |
| Construction | 1/10" Tufted Loop Pile |
| Pile Weight | 544g/m ² or 16oz/yd ² |
| Pile Height | 3.0mm |
| Total Thickness | 4.0 - 5.0mm |
| Backing | BioFlex Bitumen Back™ |


Standard Size

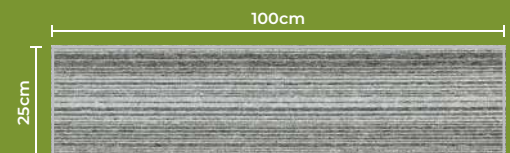


PP



Herringbone

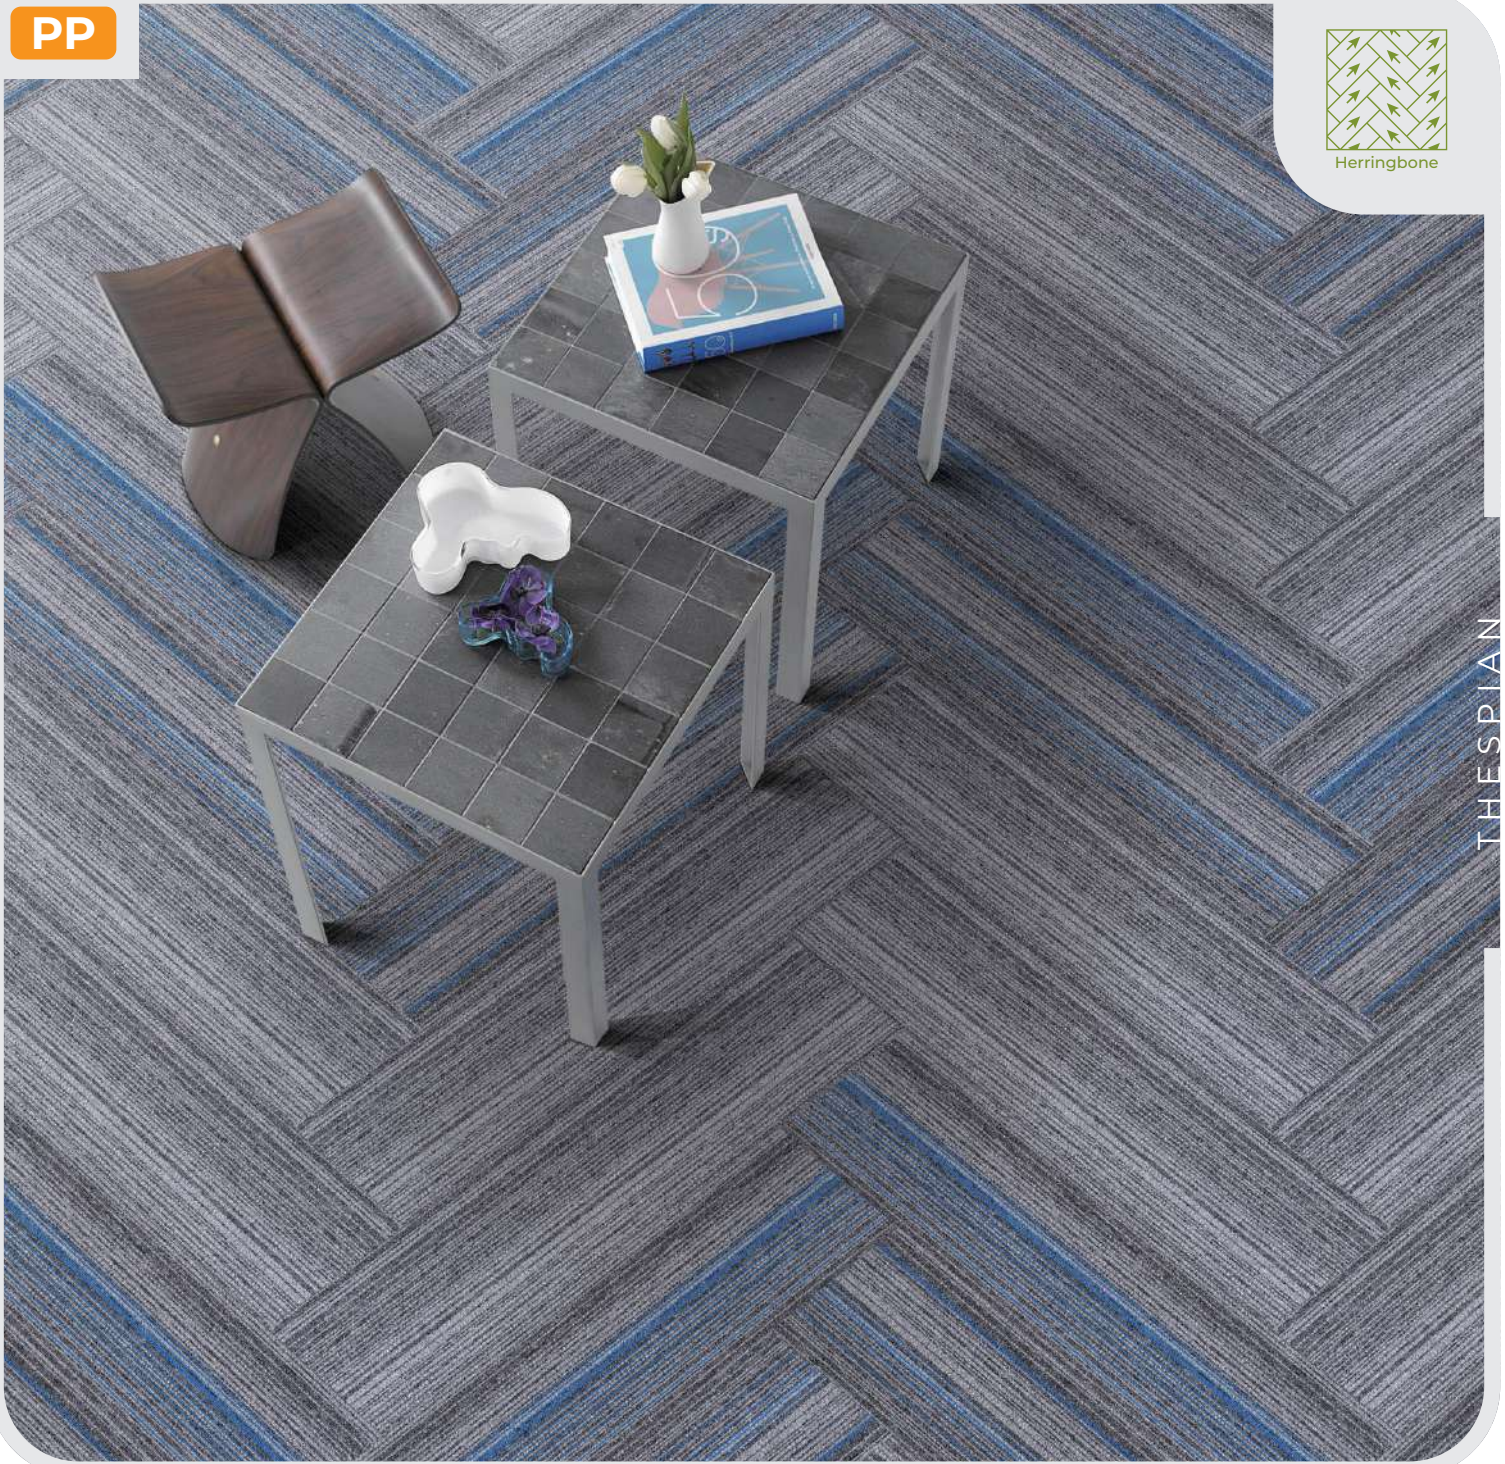

THESPIAN

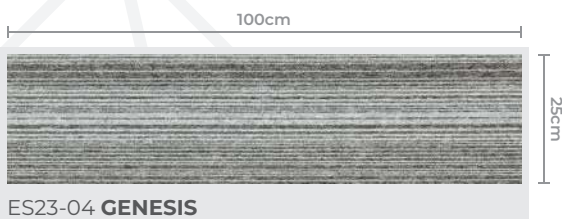

ES23-04 GENESIS

PRODUCT SPECIFICATION

CONSTRUCTION 1/10" Tufted Loop Pile

FIBRE Stainshield PP

PILE WEIGHT 544g/m² or 16oz/yd²

PILE HEIGHT 3.0mm

TOTAL THICKNESS 4.0 - 5.0mm

BACKING BioFlex Bitumen Back™

NO. OF TILES/ BOX 20 pcs / 54sqft (5sqm)




AMAZONESSENTIALS®
carpet tiles


THESPIAN

Stainshield PP | BioFlex Bitumen Back™

PP

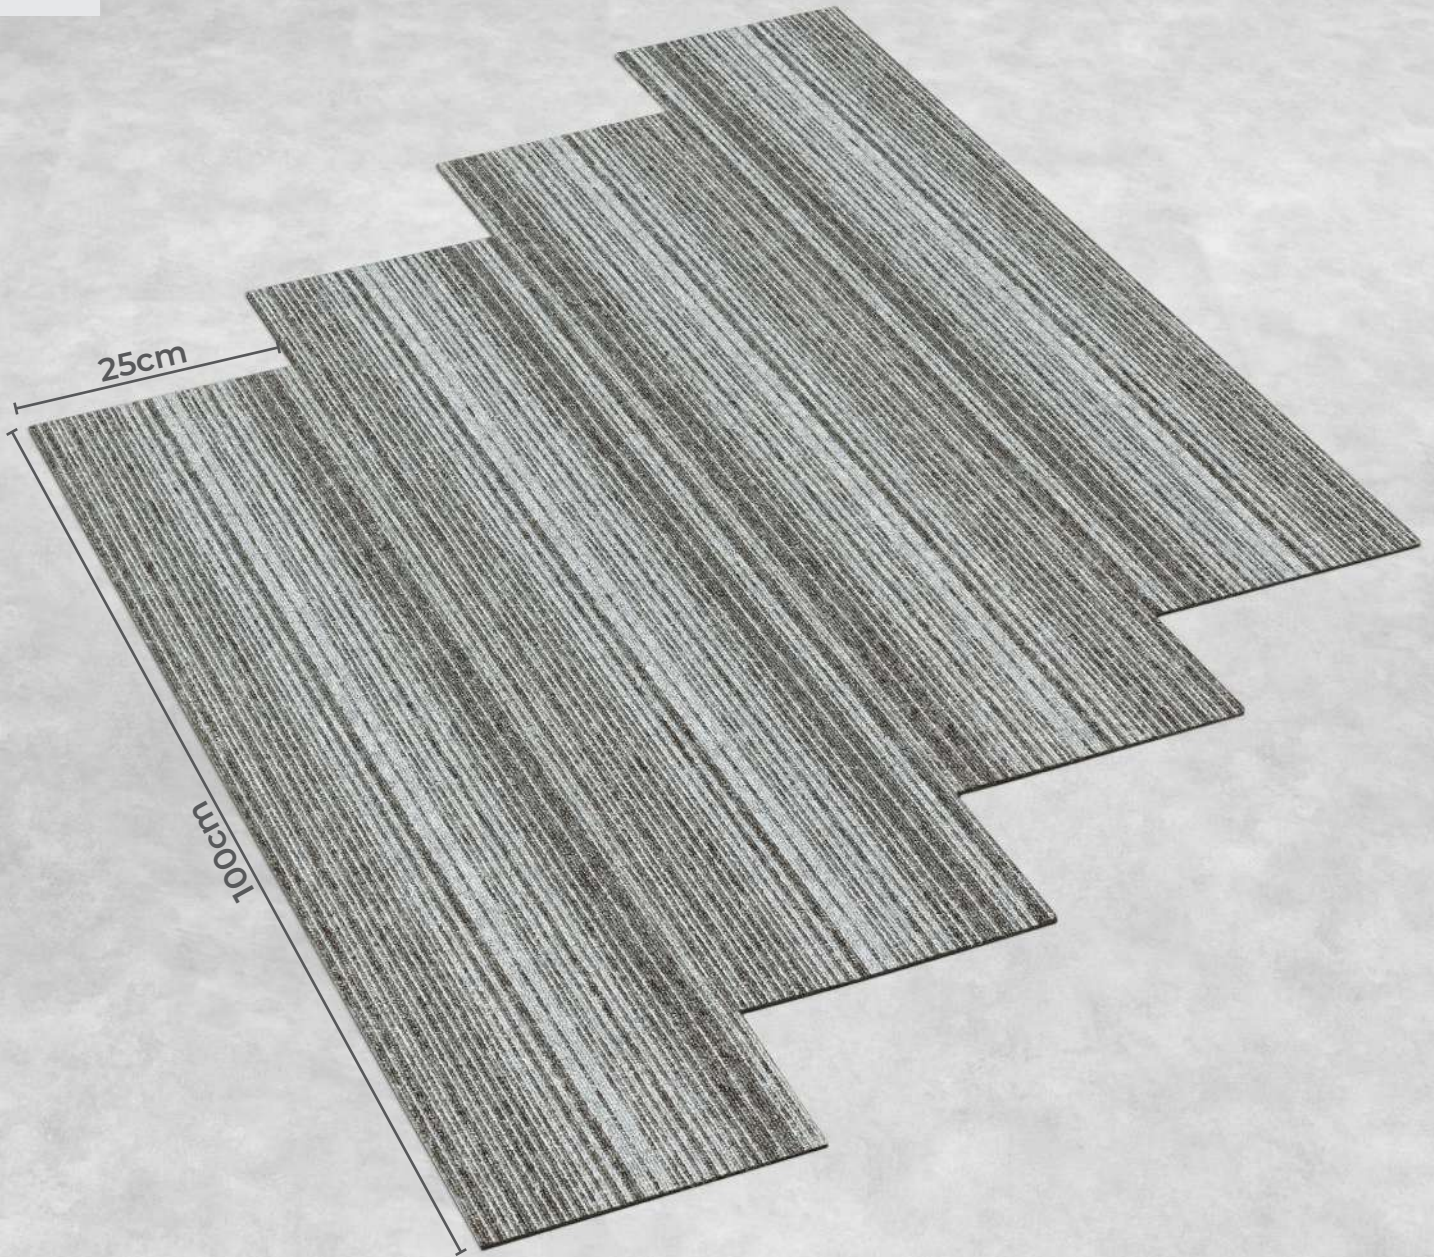

THESPIAN

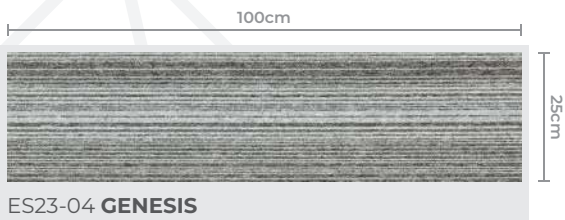

ES23-04 GENESIS

PRODUCT SPECIFICATION

| | |
|--------------------------|---|
| CONSTRUCTION | 1/10" Tufted Loop Pile |
| FIBRE | Stainshield PP |
| PILE WEIGHT | 544g/m ² or 16oz/yd ² |
| PILE HEIGHT | 3.0mm |
| TOTAL THICKNESS | 4.0 - 5.0mm |
| BACKING | BioFlex Bitumen Back™ |
| NO. OF TILES/ BOX | 20 pcs / 54sqft (5sqm) |



THESPIAN

Stainshield PP | BioFlex Bitumen Back™

PRODUCT SPECIFICATION

| | |
|------------------------|---|
| Construction | Tufted Loop Pile |
| Fiber | Stainshield PP |
| Gauge | 1/10" |
| Pile Weight | 544g/m ² or 16oz/yd ² |
| Pile Height | 3.0mm |
| Total Thickness | 4.0 - 5.0mm |
| Backing | BioFlex Bitumen Back™ |
| Tile Size | 25cm x 100cm |
| Package | 20pcs/ctn (5m ²) |

ENVIRONMENTAL SPECIFICATION

| | |
|-------------------------------------|-------------------------------------|
| Total Recycled Content | 30% post-consumer recycled material |
| Indoor Air Quality | CRI Green Label Plus, Greenguard |
| End-of-life Recycling | Reloop Initiative |
| Environmental Quality System | ISO14001:2004 |

PERFORMANCE SPECIFICATION

| | |
|-------------------------------|---|
| Flammability | ASTM-D-2859 Pill Test - Result: 8/8 |
| Flooring Radiant Panel | ASTM-E-648-17 - Result: ≥0.87 watts/cm² |
| Static Propensity | AATCC 134-2011 - Result: Neg. 1.0 |
| Color Fastness | AATCC 165 - Result: 5/5 |
| Stain Resistance | AATCC-175-2003 - Result: 10 - No Residual Stain |
| Dimensional Stability | Warranted not to change in size by more than 3% |
| Smoke Density | ASTM E 662-15a - Result: Average 515 |
| Roll Chair | Based on ITTS 0025 |
| Turf Bind | ASTM D 1335 - Result: 6.4 lbs |
| Piling & Fuzzing | Piling: 5 , Fuzzing: 3 |



Certified to: Q81 2755:2005
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212



PRODUCT CERTIFIED FOR
LOWER VOC EMISSIONS
(0.05)



Indoor Air Quality
Associated Testing Program
carpet-nab.org

