



**AMAZONESSENTIALS®**  
carpet tiles




Certified to: GB/T 2755 : 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212

# THESPIAN

Stainshield PP | BioFlex Bitumen Back™

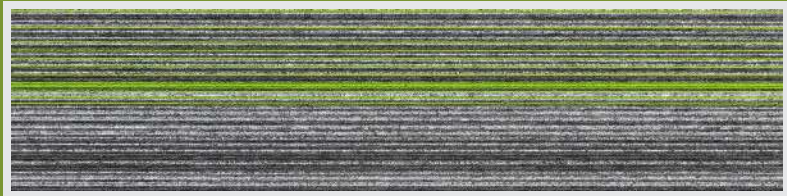


ES23-07 ELON GREEN

### Recommended Laying Patterns



Herringbone




Ashlar

### Product Specification

|                        |   |
|------------------------|---|
| <b>Fibre</b>           | Stainshield PP                              |
| <b>Construction</b>    | 1/10" Tufted Loop Pile                      |
| <b>Pile Weight</b>     | 544g/m <sup>2</sup> or 16oz/yd <sup>2</sup> |
| <b>Pile Height</b>     | 3.0mm                                       |
| <b>Total Thickness</b> | 4.0 - 5.0mm                                 |
| <b>Backing</b>         | BioFlex Bitumen Back™                       |

### Standard Size

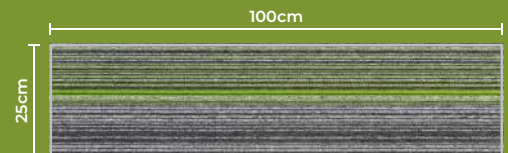




**AMAZONESSENTIALS®**  
carpet tiles


# THESPIAN

Stainshield PP | BioFlex Bitumen Back™

PP



THESPIAN

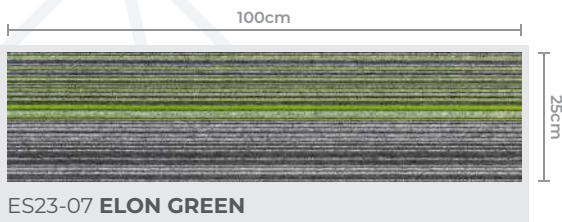

## PRODUCT SPECIFICATION

|                          |   |
|--------------------------|---|
| <b>CONSTRUCTION</b>      | 1/10" Tufted Loop Pile                      |
| <b>FIBRE</b>             | Stainshield PP                              |
| <b>PILE WEIGHT</b>       | 544g/m <sup>2</sup> or 16oz/yd <sup>2</sup> |
| <b>PILE HEIGHT</b>       | 3.0mm                                       |
| <b>TOTAL THICKNESS</b>   | 4.0 - 5.0mm                                 |
| <b>BACKING</b>           | BioFlex Bitumen Back™                       |
| <b>NO. OF TILES/ BOX</b> | 20 pcs / 54sqft (5sqm)                      |




**AMAZONESSENTIALS®**  
carpet tiles


# THESPIAN

Stainshield PP | BioFlex Bitumen Back™

PP

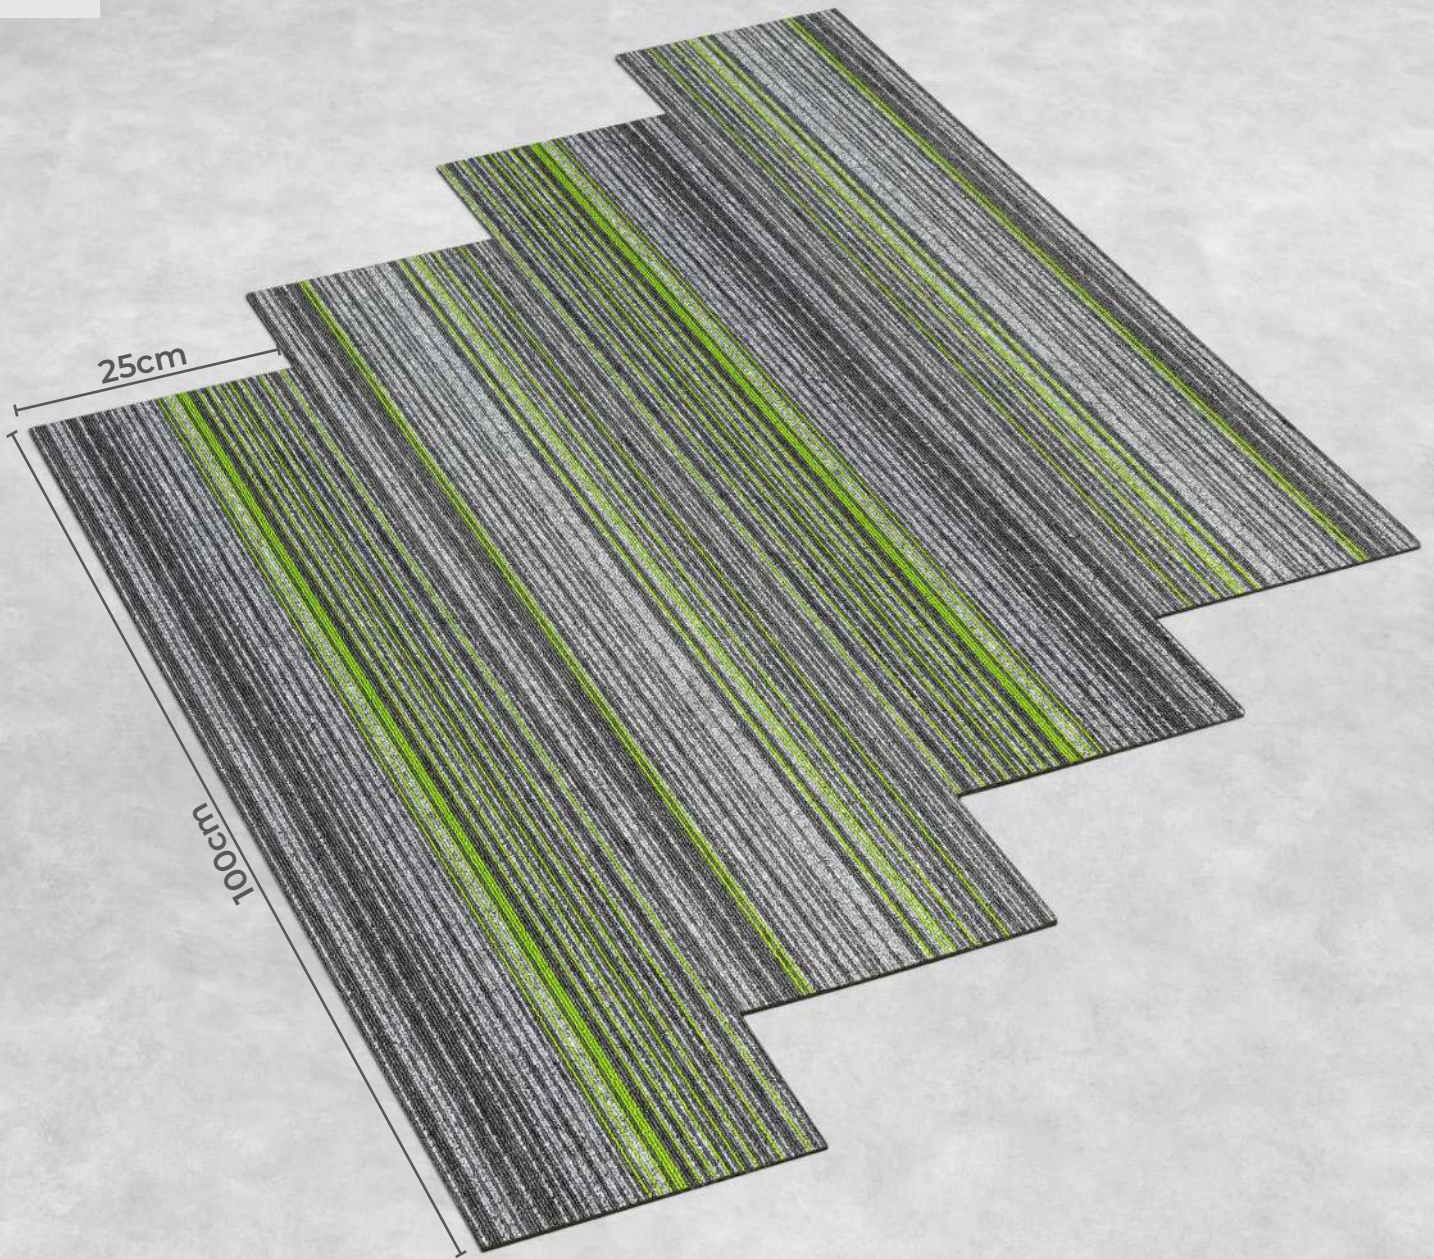

THESPIAN

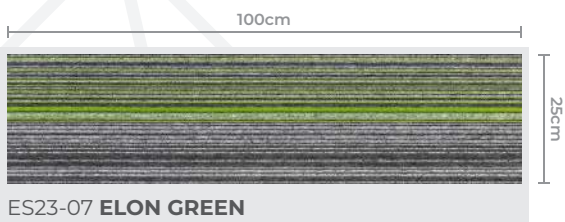

ES23-07 ELON GREEN

## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/10" Tufted Loop Pile

**FIBRE** Stainshield PP

**PILE WEIGHT** 544g/m<sup>2</sup> or 16oz/yd<sup>2</sup>

**PILE HEIGHT** 3.0mm

**TOTAL THICKNESS** 4.0 - 5.0mm

**BACKING** BioFlex Bitumen Back™

**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)



# THESPIAN

Stainshield PP | BioFlex Bitumen Back™

## PRODUCT SPECIFICATION

|                        |   |
|------------------------|---|
| <b>Construction</b>    | Tufted Loop Pile                            |
| <b>Fiber</b>           | Stainshield PP                              |
| <b>Gauge</b>           | 1/10"                                       |
| <b>Pile Weight</b>     | 544g/m <sup>2</sup> or 16oz/yd <sup>2</sup> |
| <b>Pile Height</b>     | 3.0mm                                       |
| <b>Total Thickness</b> | 4.0 - 5.0mm                                 |
| <b>Backing</b>         | BioFlex Bitumen Back™                       |
| <b>Tile Size</b>       | 25cm x 100cm                                |
| <b>Package</b>         | 20pcs/ctn (5m <sup>2</sup> )                |

## ENVIRONMENTAL SPECIFICATION

|                                     |                                     |
|-------------------------------------|-------------------------------------|
| <b>Total Recycled Content</b>       | 30% post-consumer recycled material |
| <b>Indoor Air Quality</b>           | CRI Green Label Plus, Greenguard    |
| <b>End-of-life Recycling</b>        | Reloop Initiative                   |
| <b>Environmental Quality System</b> | ISO14001:2004                       |

## PERFORMANCE SPECIFICATION

|                               |   |
|-------------------------------|---|
| <b>Flammability</b>           | ASTM-D-2859 Pill Test - <b>Result: 8/8</b>                |
| <b>Flooring Radiant Panel</b> | ASTM-E-648-17 - <b>Result: ≥0.87 watts/cm<sup>2</sup></b> |
| <b>Static Propensity</b>      | AATCC 134-2011 - <b>Result: Neg. 1.0</b>                  |
| <b>Color Fastness</b>         | AATCC 165 - <b>Result: 5/5</b>                            |
| <b>Stain Resistance</b>       | AATCC-175-2003 - <b>Result: 10 - No Residual Stain</b>    |
| <b>Dimensional Stability</b>  | Warranted not to change in size by more than <b>3%</b>    |
| <b>Smoke Density</b>          | ASTM E 662-15a - <b>Result: Average 515</b>               |
| <b>Roll Chair</b>             | Based on ITTS 0025  |
| <b>Turf Bind</b>              | ASTM D 1335 - <b>Result: 6.4 lbs</b>                      |
| <b>Piling &amp; Fuzzing</b>   | Piling: <b>5</b> , Fuzzing: <b>3</b>                      |



Certified to: Q81 2755:2005  
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212



PRODUCT CERTIFIED FOR  
LOWER VOC EMISSIONS  
(0.05)



Indoor Air Quality  
Associated Testing Program  
carpet-nab.org

