

ESSENSA

ADVANCED RIGID CORE
SPC CLIX



ESV006-06 **mathis**

Dimension 180mm x 1200mm
Overall Gauge 4mm
Packaging 12 pcs (28.40sqft per ctn)
Wear Layer 0.3mm



ESSENSA

ADVANCED RIGID CORE
SPC CLIX

ESSENSA
ADVANCED RIGID CORE
SPC CLIX



Dimension	180mm x 1200mm
Overall Gauge	4mm
Packaging	12 pcs (28.40sqft per ctn)
Wear Layer	0.3mm



ESSENS-A

ADVANCED RIGID CORE
SPC CLIX

ESSENS-A
ADVANCED RIGID CORE
SPC CLIX




SPC 4mm ▶ ESV006-06

Dimension 180mm x 1200mm
Overall Gauge 4mm
Packaging 12 pcs (28.40sqft per ctn)
Wear Layer 0.3mm



ESSENSA

ADVANCED RIGID CORE
SPC CLIX

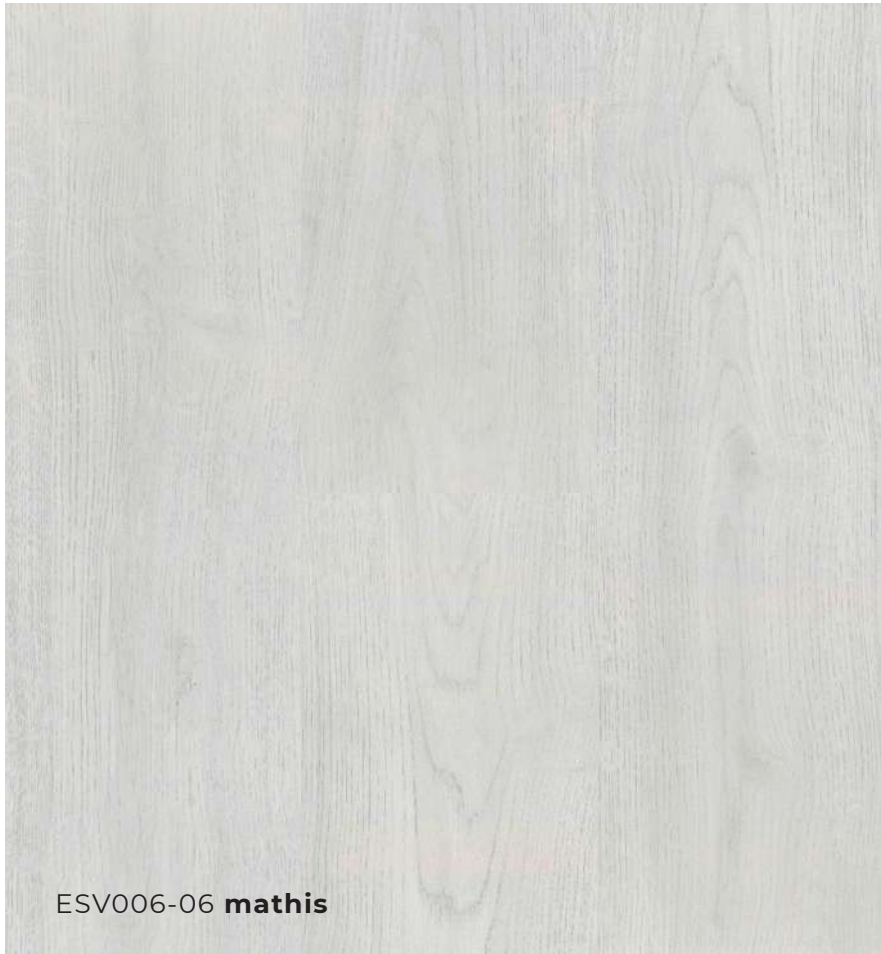

ESV006-06 **mathis**

Dimension 180mm x 1200mm
Overall Gauge 4mm
Packaging 12 pcs (28.40sqft per ctn)
Wear Layer 0.3mm



ESSENSA

ADVANCED RIGID CORE
SPC CLIX

PRODUCT SPECIFICATION

Dimension	180mm x 1200mm
Overall Gauge	4mm
Wear Layer	0.3mm
Packaging	12 pcs (28.40sqft per ctn)

PERFORMANCE SPECIFICATION

OVERALL THICKNESS TOLERANCE ISO 24346	(-0.10~0.13)mm
THICKNESS OF WEAR LAYER TOLERANCE ISO 24346	(0,+0.03)mm
DIMENSION STABILITY ISO 23999	Vertical: $\leq 0.05\%$ Horizontal: $\leq 0.10\%$
CURLING ISO 23999	$\leq 0.8\text{mm}(80\text{C}0,6\text{h})$
STAINING RESISTANCE ISO 26987	Pass
FIRE CLASSIFICATION EN 13501	BflS1
SLIP RESISTANCE DIN 51130	R9-R10
COLOR FASTNESS TO LIGHT ISO 105-B02	≥ 6
CASTOR CHAIR TEST ISO 4918	25000 round pass
ABRASION LOSS EN 660-2	$\leq 0.015\text{g}/1000\text{r}$
RESIDUAL INDENTATION ISO 24343-1 ASTM 1914	$\leq 0.10\text{mm}$ $\leq 8.0\%$



Easy Clean



UV Protection



Stain & Fade Resistant



Abrasion Resistant



Highly Durable Commercial Grade



Termite Proof



Highly Durable Commercial Grade



Multi-Effect, Realistic and Natural Look

