



**AMAZONPRIMO**<sup>®</sup>  
contract carpet tiles



M105-1 menorca grey

# COAST

MENORCA

<b>Fiber</b>	100% Resilia Nylon 6
<b>Construction</b>	Multi level Loop
<b>Pile Weight</b>	810gm/m <sup>2</sup> or 24oz/yd <sup>2</sup>
<b>Pile Height</b>	3.5mm / 4.5mm
<b>Backing</b>	BioFlex Hush Cushion Back™
<b>Tile Size</b>	33.30cm x 100cm







**AMAZONPRIMO**<sup>®</sup>  
contract carpet tiles



MENORCA ▶ M105-1 menorca grey

# COAST

---


## MENORCA

<b>Fiber</b>	100% Resilia Nylon 6
<b>Construction</b>	Multi level Loop
<b>Pile Weight</b>	810gm/m <sup>2</sup> or 24oz/yd <sup>2</sup>
<b>Pile Height</b>	3.5mm / 4.5mm
<b>Backing</b>	BioFlex Hush Cushion Back™
<b>Tile Size</b>	33.30cm x 100cm





**AMAZONPRIMO**<sup>®</sup>  
contract carpet tiles

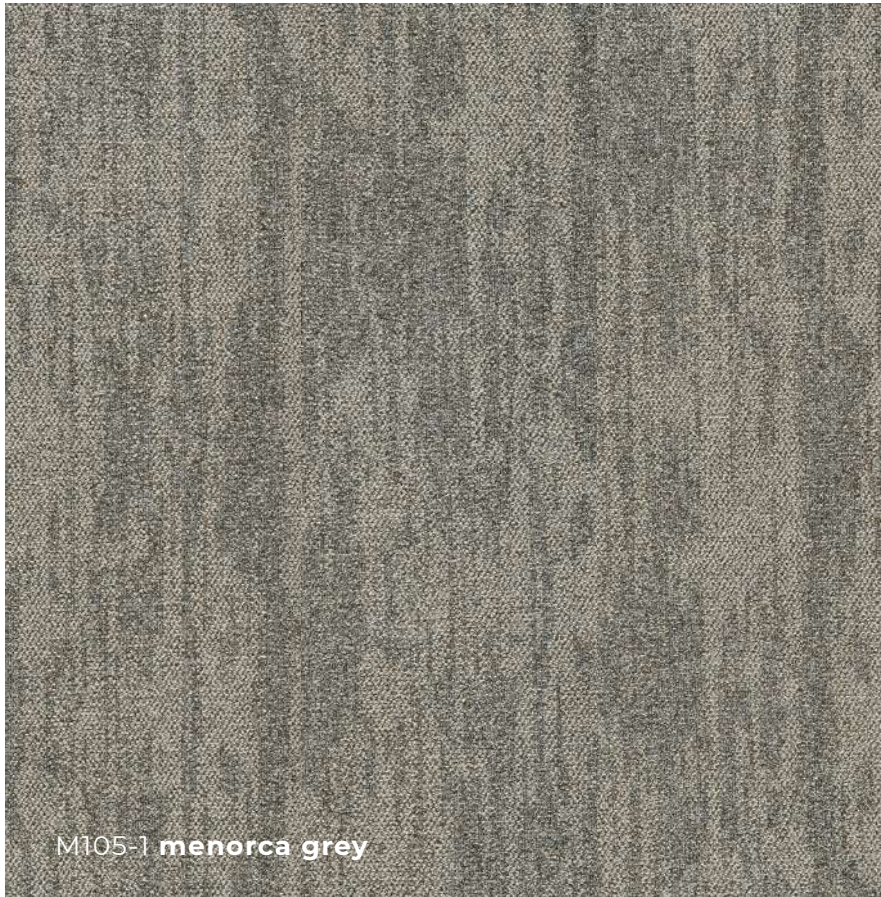

M105-1 menorca grey

# COAST

---

## MENORCA

<b>Fiber</b>	100% Resilia Nylon 6
<b>Construction</b>	Multi level Loop
<b>Pile Weight</b>	810gm/m <sup>2</sup> or 24oz/yd <sup>2</sup>
<b>Pile Height</b>	3.5mm / 4.5mm
<b>Backing</b>	BioFlex Hush Cushion Back™
<b>Tile Size</b>	33.30cm x 100cm



PRODUCT CERTIFIED FOR  
LOW CHEMICAL EMISSIONS  
UL GREENGUARD  
UL 2818



GREEN LABEL  
+PLUS  
CertiFied Quality  
GREENGUARD  
GREENGUARD  
GREENGUARD

# COAST

MENORCA

## PRODUCT SPECIFICATION

<b>Construction</b>	Multi-level loop
<b>Fibre</b>	100% Resilia Nylon 6
<b>Gauge</b>	1/12" (8+4)
<b>Pile Weight</b>	810gm/m <sup>2</sup> or 24oz/yd <sup>2</sup>
<b>Pile Height</b>	3.5mm / 4.5mm
<b>Total Thickness</b>	9mm
<b>Backing</b>	BioFlex Hush Cushion Back™
<b>Tile Size</b>	33.30cm x 100cm
<b>Package</b>	15pcs/ctn (5m <sup>2</sup> )
<b>Classification</b>	Heavy Commercial
<b>Recommended Installation</b>	Brick or Herringbone



## ENVIRONMENTAL SPECIFICATION

<b>Total Recycled Content</b>	30% post-consumer recycled material
<b>Indoor Air Quality</b>	CRI Green Label PLUS Greenguard Reloop Initiative
<b>End-of-life Recycling</b>	
<b>Environmental Quality System</b>	ISO14001:2004



## PERFORMANCE SPECIFICATION

<b>Flammability</b>	ASTM D 2859-96 / FF 1-70 / 16 CFR 1630	Pass 8/8
<b>Flooring Radiant Panel</b>	ASTM E 648-15e1	2.3%
<b>Static Propensity</b>	AATCC 134-2011	0.3 kV
<b>Color Fastness</b>	AATCC 165	5   5
<b>Stain Resistance</b>	AATCC 175-2003	7
<b>Sound Absorption</b>	ASTM C423-09a	0.13 Sabins/ft <sup>2</sup>
<b>Dimensional Stability</b>	ASTM D7570(AACHEN/ISO2551)	<0.15%
<b>Smoke Density</b>	ASTM E 662-15a	Ds(1.5)≤100 and Ds(4.0)≤200
<b>Roll Chair</b>	ITTS-205	3.0
<b>Tuft Bind</b>	ASTM D 1335	8.5lbs
<b>Pilling &amp; Fuzzing</b>	ITTS 002	5/5



**AMAZONPRIMO**<sup>®</sup>  
contract carpet tiles