




# BASE

MaxLustre PP | BioFlex Bitumen Back™



M9007-10  
**BASE NAVY**

### Recommended Laying Patterns




Quarter Turn

### Product Specification

<b>Fibre</b>	MaxLustre PP
<b>Construction</b>	1/10" Tufted Loop Pile
<b>Pile Weight</b>	610gm/m <sup>2</sup> or 18oz/yd <sup>2</sup>
<b>Pile Height</b>	2.8mm
<b>Total Thickness</b>	4.5mm
<b>Backing</b>	BioFlex Bitumen Back™

### Standard Size







**AMAZONESSENTIALS®**  
carpet tiles

# BASE

MaxLustre PP | BioFlex Bitumen Back™


PP

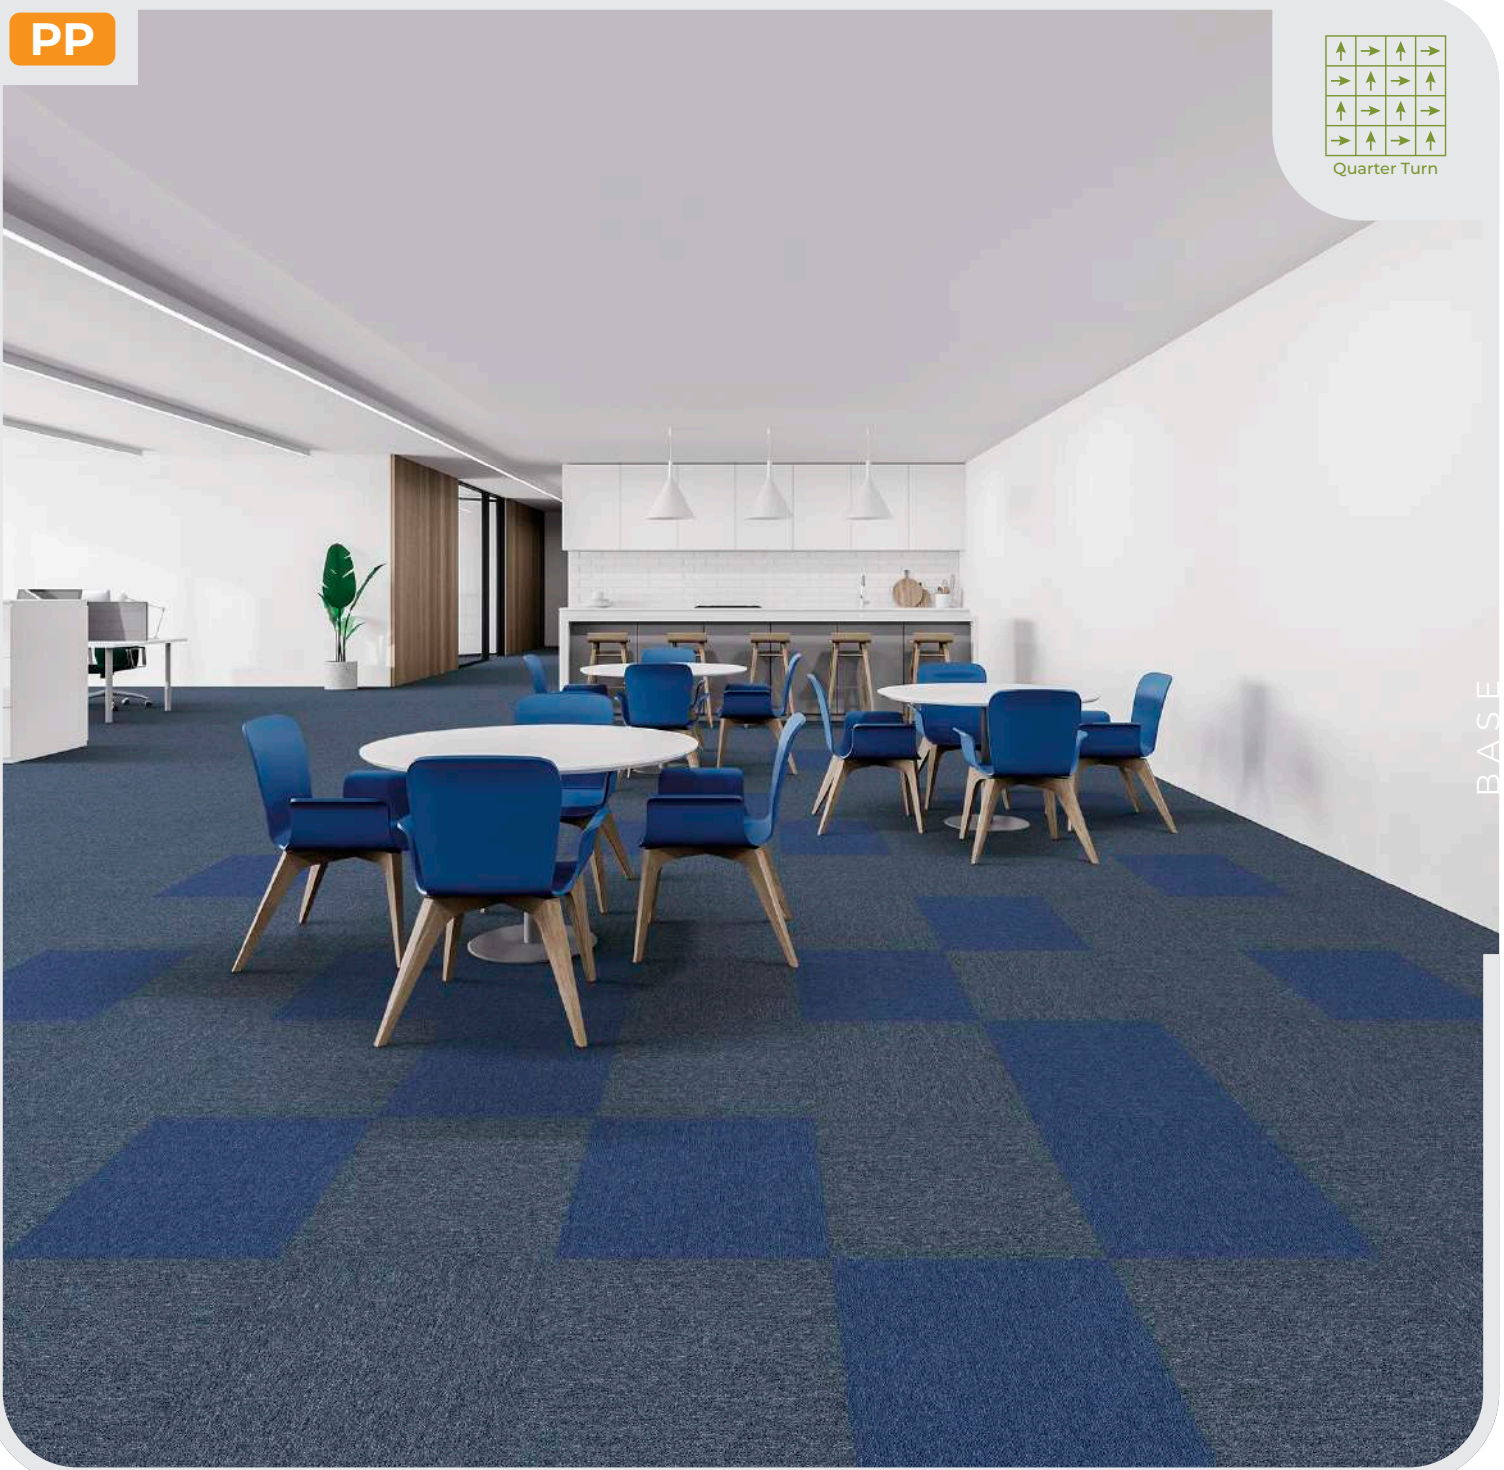

BASE



M9007-5  
**BASE COBALT**



M9007-10  
**BASE NAVY**

## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/10" Tufted Loop Pile
<b>FIBRE</b>	MaxLustre PP
<b>PILE WEIGHT</b>	610gm/m <sup>2</sup> or 18oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	2.8mm
<b>TOTAL THICKNESS</b>	4.5mm
<b>BACKING</b>	BioFlex Bitumen Back™
<b>NO. OF TILES/ BOX</b>	20 pcs / 54sqft (5sqm)



**AMAZONESSENTIALS®**  
carpet tiles


# BASE

MaxLustre PP | BioFlex Bitumen Back™

PP



BASE



M9007-10  
**BASE NAVY**

## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/10" Tufted Loop Pile
<b>FIBRE</b>	MaxLustre PP
<b>PILE WEIGHT</b>	610gm/m <sup>2</sup> or 18oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	2.8mm
<b>TOTAL THICKNESS</b>	4.5mm
<b>BACKING</b>	BioFlex Bitumen Back™
<b>NO. OF TILES/ BOX</b>	20 pcs / 54sqft (5sqm)



**AMAZONESSENTIALS®**  
carpet tiles


# BASE

MaxLustre PP | BioFlex Bitumen Back™

PP



BASE



M9007-10  
**BASE NAVY**

## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/10" Tufted Loop Pile
<b>FIBRE</b>	MaxLustre PP
<b>PILE WEIGHT</b>	610gm/m <sup>2</sup> or 18oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	2.8mm
<b>TOTAL THICKNESS</b>	4.5mm
<b>BACKING</b>	BioFlex Bitumen Back™
<b>NO. OF TILES/ BOX</b>	20 pcs / 54sqft (5sqm)



# BASE

MaxLustre PP | BioFlex Bitumen Back™

## PRODUCT SPECIFICATION

<b>Construction</b>	Tufted Loop Pile
<b>Fiber</b>	MaxLustre PP
<b>Gauge</b>	1/10"
<b>Pile Weight</b>	610gm/m <sup>2</sup> or 18oz/yd <sup>2</sup>
<b>Pile Height</b>	2.8mm
<b>Total Thickness</b>	4.5mm
<b>Backing</b>	BioFlex Bitumen Back™
<b>Tile Size</b>	50cm x 50cm
<b>Package</b>	20pcs / 54sqft (5m <sup>2</sup> )

## PERFORMANCE SPECIFICATION

<b>Flammability</b>	ASTM E648-06 - $\geq 1.13$ watts/cm <sup>2</sup>
<b>Radiant Panel</b>	ASTM D2859-06 - 8
<b>Pile Test</b>	ASTM E662-06 - <b>Max. 450</b>
<b>Smoke Density</b>	
<b>Color Fastness</b>	
<b>To Light</b>	AATCC 16E - 5
<b>To Wet &amp; Dry Crocking</b>	AATCC 165 - 5
<b>To Ozone</b>	AATCC 129 - 5
<b>Stain Resistance</b>	AATCC 175-2003 - 10
<b>Static Propensity</b>	AATCC 134-1996 - less than 4kV
<b>Tuft Bind</b>	ASTM D1335 - 8.6lbs
<b>Dimensional Stability</b>	AACHEN - <0.1%



Certified to: QB1 2755-2005  
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212



PRODUCT CERTIFIED FOR  
LOW VOC EMISSIONS  
(0.05)



Indoor Air Quality  
Assessment Accredited Program  
carpet-nub.org

