



**AMAZONMODULO®**  
luxury carpet tiles



**SIRIM**  
Certified to: GB/T 2755 : 2005  
Certification No.: PC011916




**SIRIM**  
ECO-LABEL  
Low VOC  
Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212

# CAPTURE

MaxLustre PP | BioFlex Bitumen Back™

COLORPOINT

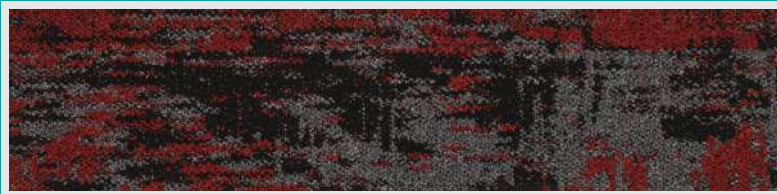


M9009-9 CAPTURE CRIMSON

## Recommended Laying Patterns



Herringbone




Ashlar


## Product Specification

**Fibre** MaxLustre PP  
**Construction** 1/12" Multi-Level Loop  
**Color Point** 750gm/m<sup>2</sup> or 22oz/yd<sup>2</sup>  
**Pile Weight** 2.3mm - 4.5mm  
**Pile Height** 5.0mm - 6.0mm  
**Total Thickness** BioFlex Bitumen Back™

## Standard Size

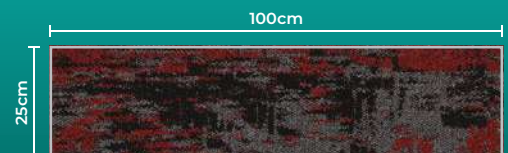

PP



Ashlar



M9009-9 **CAPTURE CRIMSON**

## PRODUCT SPECIFICATION

|                          |  |
|--------------------------|--|
| <b>CONSTRUCTION</b>      | 1/12" Multi-Level Loop, <b>Color Point</b>   |
| <b>FIBRE</b>             | MaxLustre PP                                 |
| <b>PILE WEIGHT</b>       | 750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup> |
| <b>PILE HEIGHT</b>       | 2.3mm - 4.5mm                                |
| <b>TOTAL THICKNESS</b>   | 5.0mm - 6.0mm                                |
| <b>BACKING</b>           | BioFlex Bitumen Back™                        |
| <b>NO. OF TILES/ BOX</b> | 20 pcs / 54sqft (5sqm)                       |



# CAPTURE

MaxLustre PP | BioFlex Bitumen Back™

## COLORPOINT

### PRODUCT SPECIFICATION

|                 |  |
|-----------------|--|
| Construction    | Multi-level loop, <b>Color Point</b>         |
| Fiber           | MaxLustre PP                                 |
| Gauge           | 1/12"  |
| Pile Weight     | 750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup> |
| Pile Height     | 2.3 - 4.5mm                                  |
| Total Thickness | 5.0 - 6.0mm                                  |
| Backing         | BioFlex Bitumen Back™                        |
| Tile Size       | 25cm x 100cm                                 |
| Package         | 20pcs / 54sqft (5m <sup>2</sup> )            |

### ENVIRONMENTAL SPECIFICATION

|                |  |
|----------------|--|
| Sustainability | Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent. |
|----------------|--|

### PERFORMANCE SPECIFICATION

|                        |   |
|------------------------|---|
| TVOCs                  | Green Guard AQS Report no. 903193-13/<br>CRI Green Label Plus - <b>&lt;0.5mg/m<sup>2</sup>/hour</b> |
| Flammability           | ASTM-D-2859-96 / FF 1-70 / 16 CFR 1630 - <b>Pass 8/8</b>  |
| Flooring Radiant Panel | ASTM-E-648-15e1 - <b>29.2%</b>  |
| Static Propensity      | AATCC-134-2011 - <b>0.2 kV</b>  |
| Color Fastness         | AATCC-165 - <b>5/5</b>  |
| Stain Resistance       | AATCC-175-2003 - <b>Result: 10</b>  |
| Dimensional Stability  | ASTM-D7570(AACHEN/ISO2551) - <b>&lt;0.15%</b>   |
| Smoke Density          | ASTM-E-662-15a - <b>Ds(1.5)≤100 and Ds(4.0)≤200</b>   |
| Roll Chair             | ITTS-205 - <b>3.0</b>   |
| Tuft Bind              | ASTM-D-1335 - <b>7.1lbs</b>   |
| Pilling & Fuzzing      | ITTS 002 - <b>5/5</b>   |



Certified to: Q81 2755:2005  
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212



PRODUCT CERTIFIED FOR  
LOW VOC EMISSIONS  
(USGBC)



Indoor Air Quality  
Assessment Institute  
certified program

