




**AMAZONMODULO®**  
luxury carpet tiles



# SYNCHRO


MaxLustre PP | BioFlex Bitumen Back™

COLORPOINT




M9010-1  
**SYNCHRO PEARL**


## Recommended Laying Patterns



Quarter Turn



Ashlar




Brick

## Product Specification


|                        |                                              |
|------------------------|----------------------------------------------|
| <b>Fibre</b>           | MaxLustre PP                                 |
| <b>Construction</b>    | 1/12" Multi-Level Loop <b>Color Point</b>    |
| <b>Pile Weight</b>     | 750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup> |
| <b>Pile Height</b>     | 2.3mm - 4.5mm                                |
| <b>Total Thickness</b> | 5.0mm - 6.0mm                                |
| <b>Backing</b>         | BioFlex Bitumen Back™                        |

## Standard Size







PP



Quarter Turn

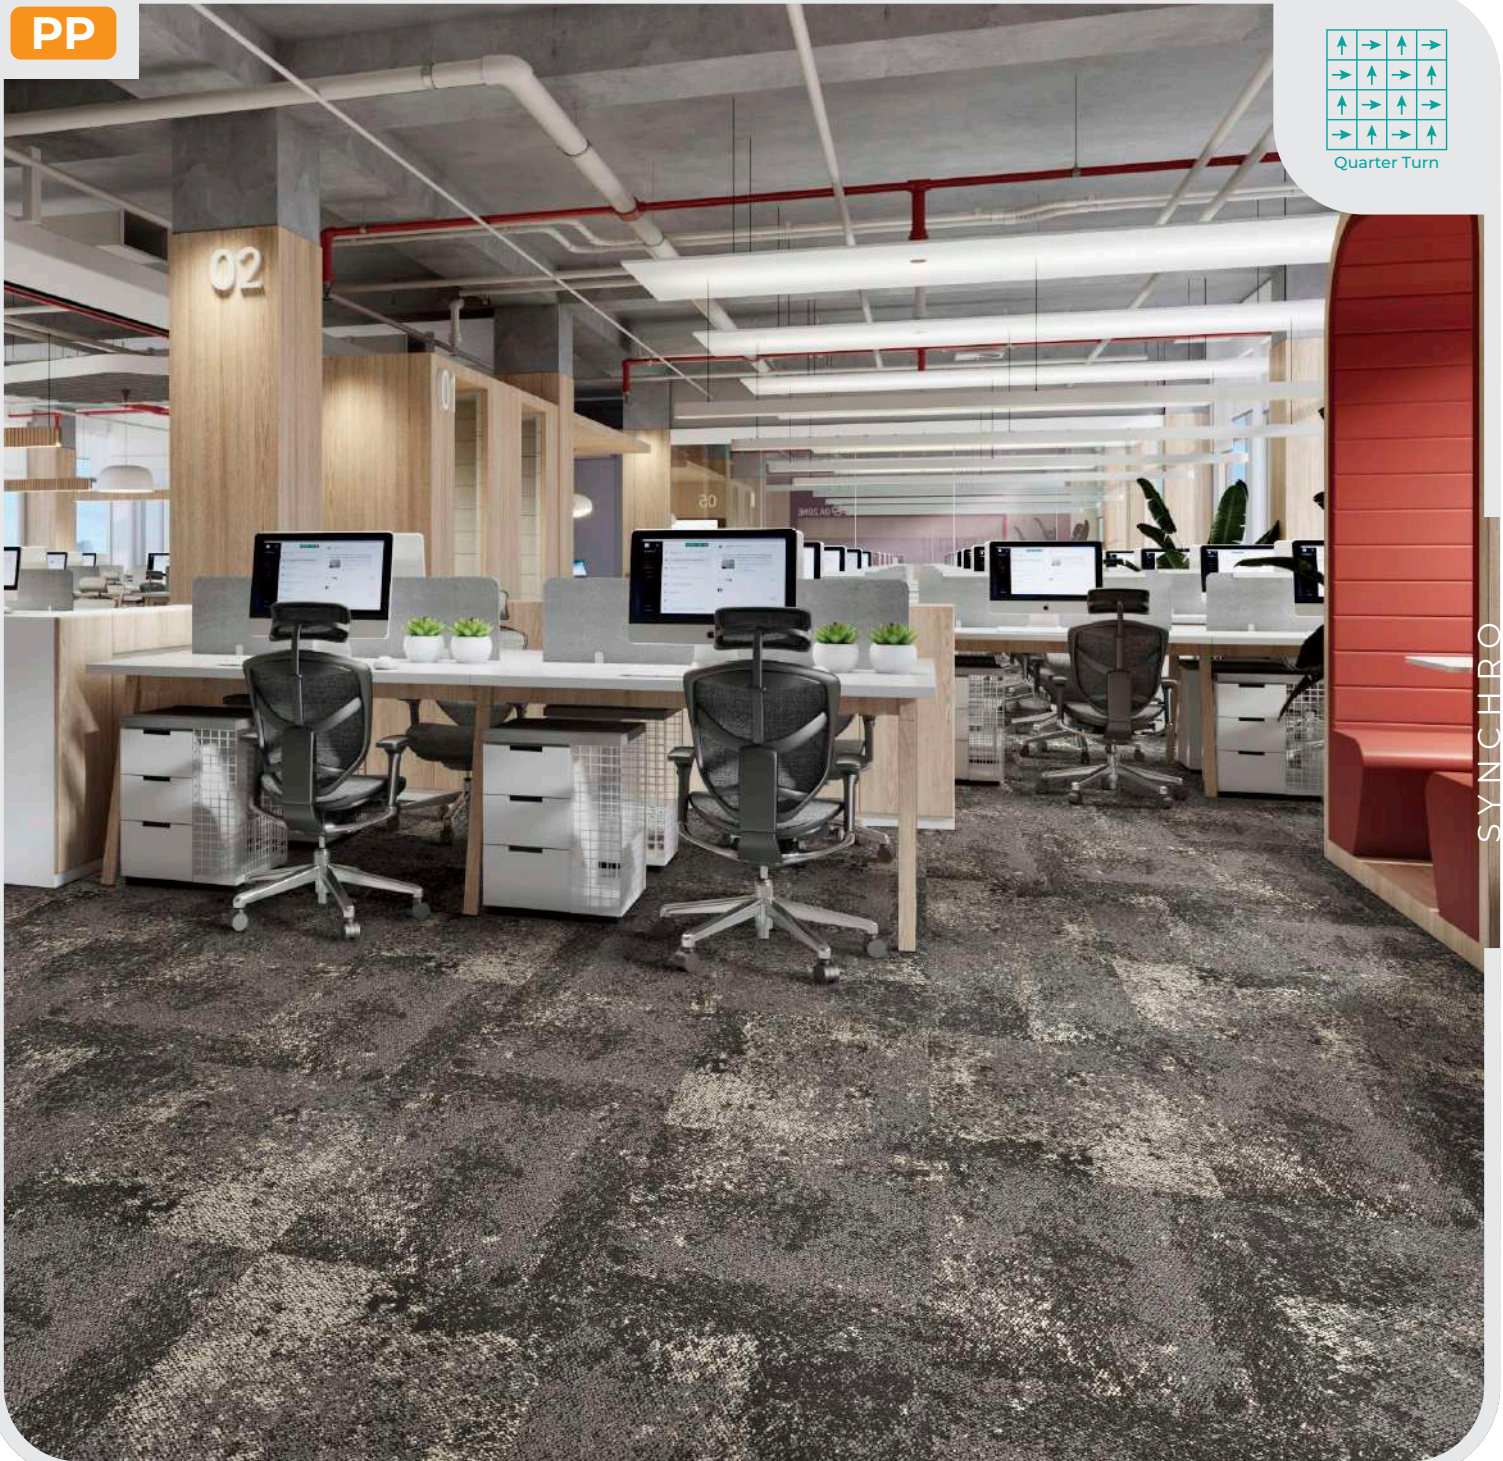

M9010-1  
**SYNCHRO PEARL**

## PRODUCT SPECIFICATION

|                   |                                              |
|-------------------|----------------------------------------------|
| CONSTRUCTION      | 1/12" Multi-Level Loop, <b>Color Point</b>   |
| FIBRE             | MaxLustre PP                                 |
| PILE WEIGHT       | 750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup> |
| PILE HEIGHT       | 2.3mm - 4.5mm                                |
| TOTAL THICKNESS   | 5.0mm - 6.0mm                                |
| BACKING           | BioFlex Bitumen Back™                        |
| NO. OF TILES/ BOX | 20 pcs / 54sqft (5sqm)                       |





**AMAZONMODULO®**  
luxury carpet tiles

# SYNCHRO

MaxLustre PP | BioFlex Bitumen Back™

COLORPOINT

## PRODUCT SPECIFICATION

|                 |                                              |
|-----------------|----------------------------------------------|
| Construction    | Multi-level loop, <b>Color Point</b>         |
| Fiber           | MaxLustre PP                                 |
| Gauge           | 1/12"                                        |
| Pile Weight     | 750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup> |
| Pile Height     | 2.3 - 4.5mm                                  |
| Total Thickness | 5.0 - 6.0mm                                  |
| Backing         | BioFlex Bitumen Back™                        |
| Tile Size       | 50cm x 50cm                                  |
| Package         | 20pcs / 54sqft (5m <sup>2</sup> )            |

## ENVIRONMENTAL SPECIFICATION

|                |                                                                                                                                          |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainability | Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent. |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------|

## PERFORMANCE SPECIFICATION

|                        |                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------|
| TVOCs                  | Green Guard AQS Report no. 903193-13/<br>CRI Green Label Plus - <b>&lt;0.5mg/m<sup>2</sup>/hour</b> |
| Flammability           | ASTM-D-2859-96 / FF 1-70 / 16 CFR 1630 - <b>Pass 8/8</b>                                            |
| Flooring Radiant Panel | ASTM-E-648-15e1 - <b>29.2%</b>                                                                      |
| Static Propensity      | AATCC-134-2011 - <b>0.2 kV</b>                                                                      |
| Color Fastness         | AATCC-165 - <b>5/5</b>                                                                              |
| Stain Resistance       | AATCC-175-2003 - <b>Result: 10</b>                                                                  |
| Dimensional Stability  | ASTM-D7570(AACHEN/ISO2551) - <b>&lt;0.15%</b>                                                       |
| Smoke Density          | ASTM-E-662-15a - <b>Ds(1.5)≤100 and Ds(4.0)≤200</b>                                                 |
| Roll Chair             | ITTS-205 - <b>3.0</b>                                                                               |
| Tuft Bind              | ASTM-D-1335 - <b>7.1lbs</b>                                                                         |
| Pilling & Fuzzing      | ITTS 002 - <b>5/5</b>                                                                               |



Certified to: Q81/2735:2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035:2012  
Certification No.: EL000212

