



AMAZONESSENTIALS®
carpet tiles



SIRIM
Certified to: GB/T 2755 : 2005
Certification No.: PC011916



SIRIM
ECO-LABEL
Low VOC
Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212

BLOCK

MaxLustre PP | BioFlex Bitumen Back™




M9013-2 **BLOCK CARBON**

Recommended Laying Patterns



Herringbone




Ashlar

Product Specification

Fibre	MaxLustre PP
Construction	1/12" Tufted Loop Pile
Pile Weight	678g/m ² or 20oz/yd ²
Pile Height	3.0 - 4.5mm
Total Thickness	5.0 - 6.0mm
Backing	BioFlex Bitumen Back™

Standard Size

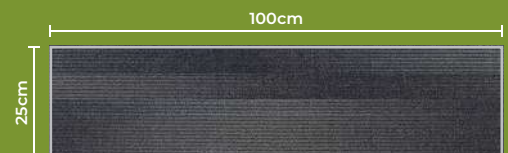




AMAZONESSENTIALS®
carpet tiles



BLOCK

MaxLustre PP | BioFlex Bitumen Back™

PP



Ashlar

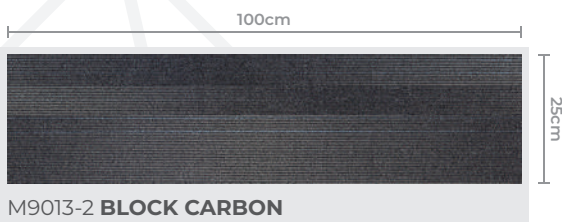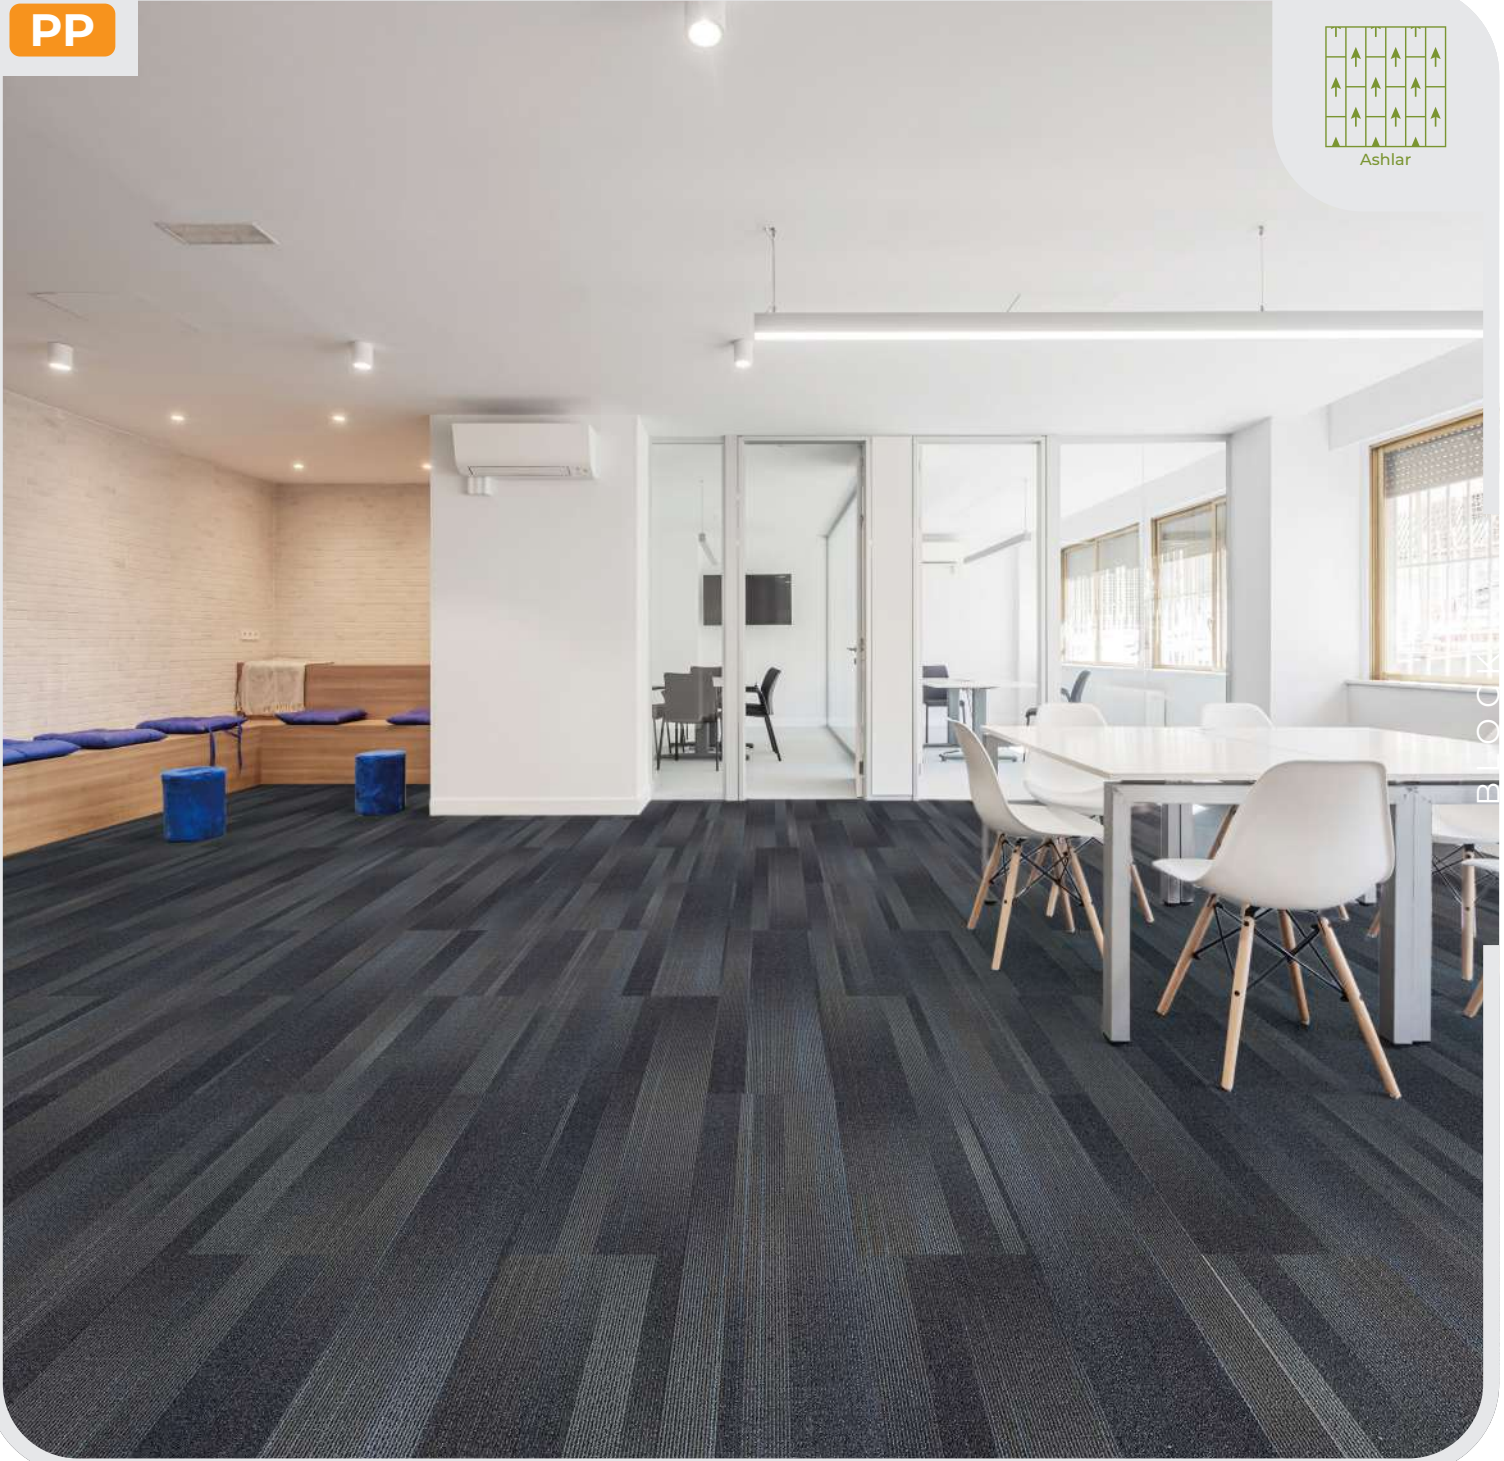

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	678g/m ² or 20oz/yd ²
PILE HEIGHT	3.0 - 4.5mm
TOTAL THICKNESS	5.0 - 6.0mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)



BLOCK

MaxLustre PP | BioFlex Bitumen Back™

PRODUCT SPECIFICATION

Construction	Tufted Loop Pile
Fiber	MaxLustre PP
Gauge	1/12"
Pile Weight	678gm/m ² or 20oz/yd ²
Pile Height	3.0 - 4.5mm
Total Thickness	5.0 - 6.0mm
Backing	BioFlex Bitumen Back™
Tile Size	25cm x 100cm
Package	20pcs / 54sqft (5m ²)

ENVIRONMENTAL SPECIFICATION

Sustainability	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
-----------------------	--

PERFORMANCE SPECIFICATION

Static Electricity	Permanent lifetime protection - less than 3.5kV
Lodging-Resistance	Superior fibre resistance
Wear Warranty	Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years
Dimensional Stability	Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.
Color Fastness to Rubbing	GB/T3920-2008 Standard: >Grade 4 for dry rubbing >Grade 3 for wet rubbing



Certified to: QB1 2735:2005
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212



PRODUCT CERTIFIED FOR
ENVIRONMENTAL SOLUTIONS
(V.011)



Indoor Air Quality
Associated Testing Program
carpet-nab.org

