




**AMAZONPRIMO**<sup>®</sup>

contract carpet tiles

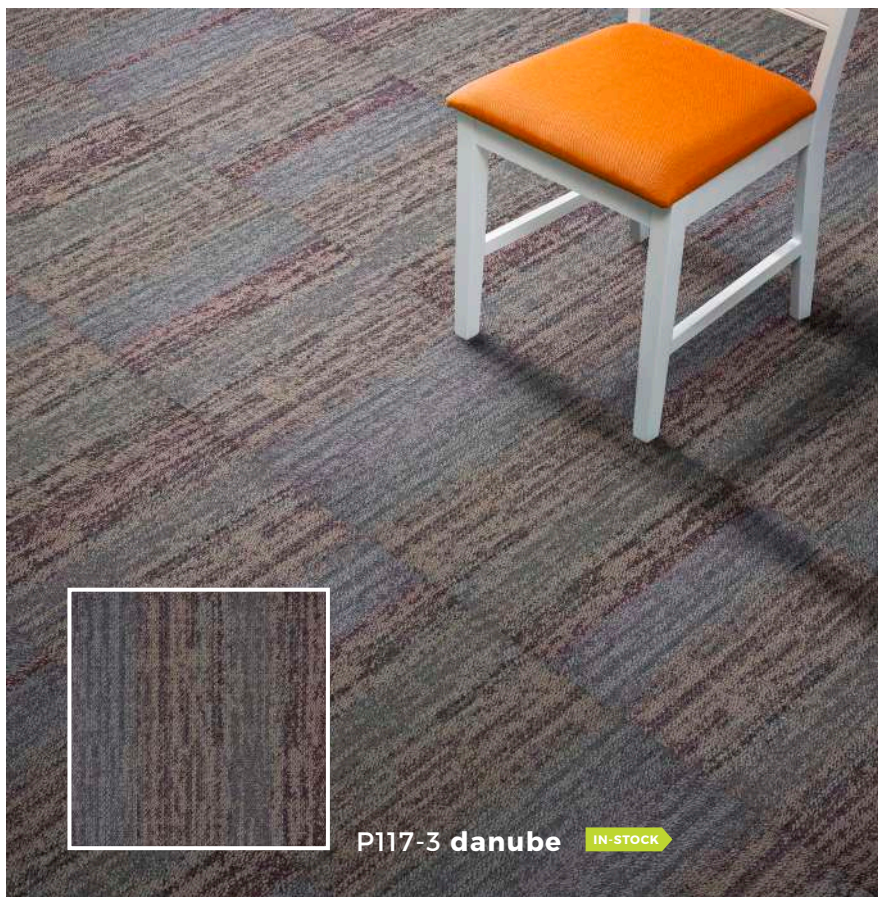

P117-3 danube

IN-STOCK

# HEATWAVE

RAPID

**Fibre**

Resillia Nylon Type 6

**Construction**

Multi-level loop

**Pile Weight**

21oz/yd<sup>2</sup> or 712g/m<sup>2</sup>


**Standard Size**

50cmx50cm





**AMAZONPRIMO**<sup>®</sup>  
contract carpet tiles

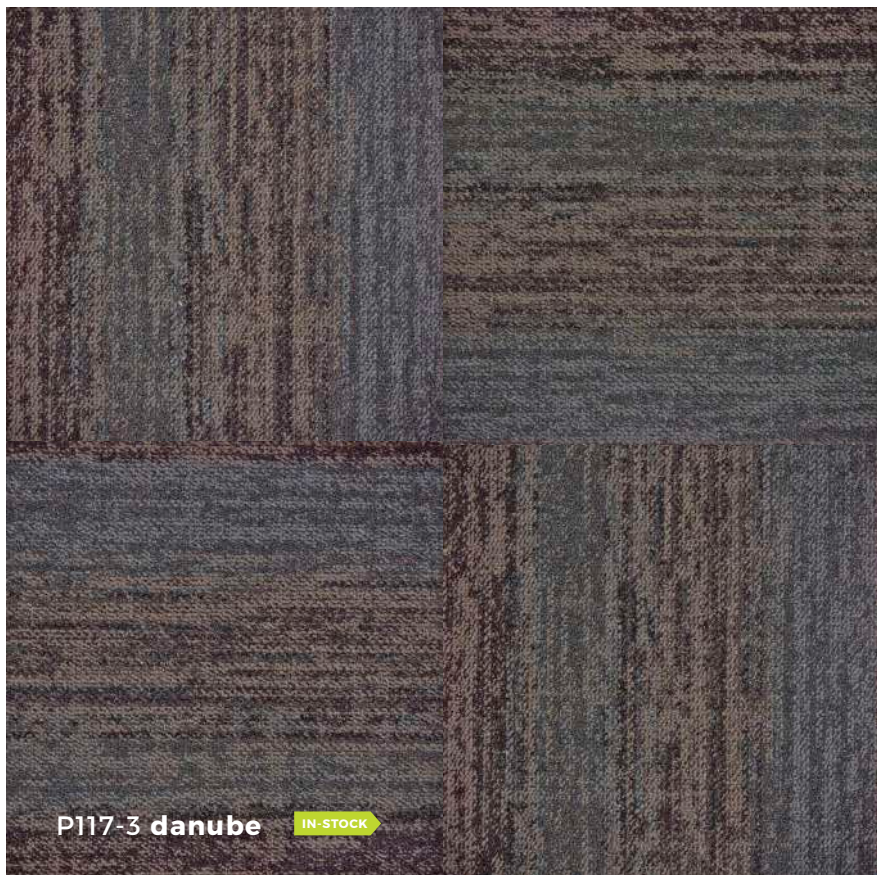

P117-3 danube

IN-STOCK

# HEATWAVE


RAPID

<b>Fibre</b>	Resillia Nylon Type 6
<b>Construction</b>	Multi-level loop
<b>Pile Weight</b>	21oz/yd <sup>2</sup> or 712g/m <sup>2</sup>
<b>Standard Size</b>	50cmx50cm





**AMAZONPRIMO**<sup>®</sup>  
contract carpet tiles

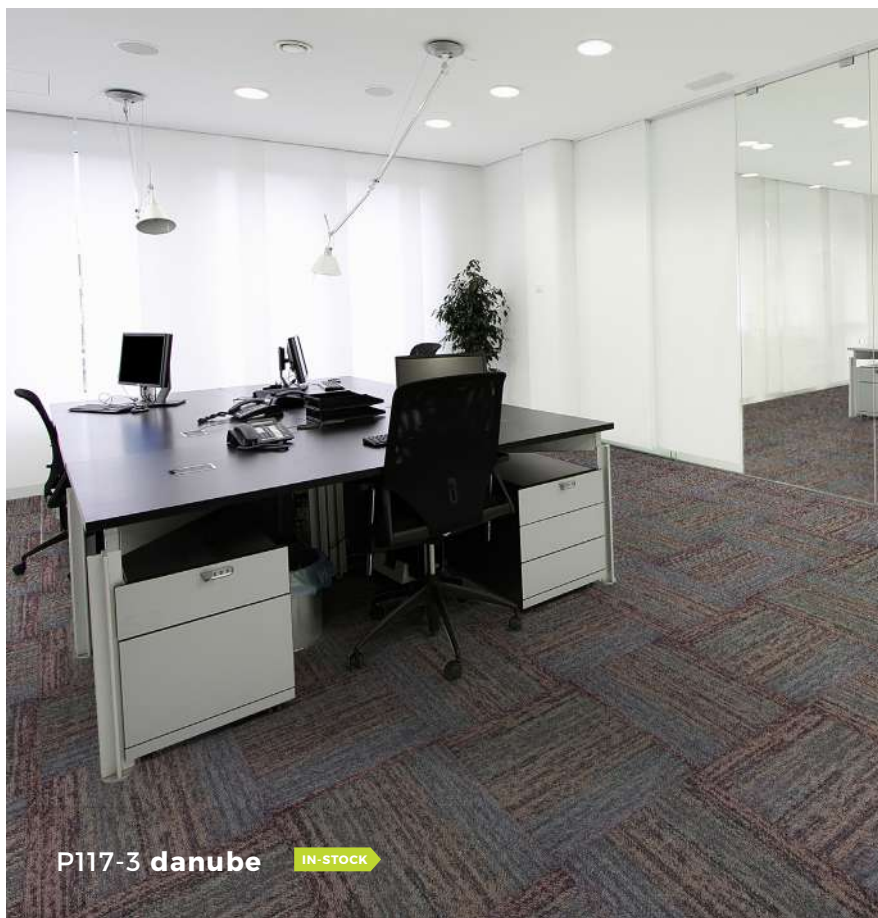

P117-3 danube

IN-STOCK

# HEATWAVE

RAPID

<b>Fibre</b>	Resillia Nylon Type 6
<b>Construction</b>	Multi-level loop
<b>Pile Weight</b>	21oz/yd <sup>2</sup> or 712g/m <sup>2</sup>
<b>Standard Size</b>	50cmx50cm



# HEATWAVE

## RAPIDS

### PRODUCT SPECIFICATION

<b>Construction</b>	Multi-level loop
<b>Fibre</b>	Resillia Nylon Type 6
<b>Dye Method</b>	Solution Dyed
<b>Pile Weight</b>	21oz/yd <sup>2</sup> or 712g/m <sup>2</sup>
<b>Pile Height</b>	2.5mm-6mm (+0.5mm)
<b>Total Height</b>	8.0mm
<b>Gauge</b>	1/10"
<b>Backing</b>	SynthBack™
<b>No. of Tiles/Box</b>	20 (5m <sup>2</sup> )
<b>Standard Size</b>	50cmx50cm
<b>Classification</b>	Heavy Commercial
<b>Recommended Installation</b>	Brick, Ashlar & Quarter Turn



### ENVIRONMENTAL SPECIFICATION

<b>Total Recycled Content</b>	30% post-consumer recycled material
<b>Indoor Air Quality</b>	CRI Green Label PLUS Greenguard
<b>End-of-life Recycling</b>	ReLoop Initiative
<b>Environmental Quality System</b>	ISO14001:2004



### PERFORMANCE SPECIFICATION

<b>Flammability</b>	ASTM D 2859-96 / FF 1-70 / 16 CFR 1630	Pass 8/8
<b>Flooring Radiant Panel</b>	ASTM E 648-15e1	2.3%
<b>Static Propensity</b>	AATCC 134-2011	0.3 kV
<b>Color Fastness</b>	AATCC 165	5   5
<b>Stain Resistance</b>	AATCC 175-2003	7
<b>Sound Absorption</b>	ASTM C423-09a	0.13 Sabins/ft <sup>2</sup>
<b>Dimensional Stability</b>	ASTM D7570(AACHEN/ISO2551)	<0.15%
<b>Smoke Density</b>	ASTM E 662-15a	Ds(1.5)≤100 and Ds(4.0)≤200
<b>Roll Chair</b>	ITTS-205	3.0
<b>Tuft Bind</b>	ASTM D 1335	8.5lbs
<b>Pilling &amp; Fuzzing</b>	ITTS 002	5/5



**AMAZONPRIMO**<sup>®</sup>  
contract carpet tiles