




AMAZONPRIMO[®]
contract carpet tiles

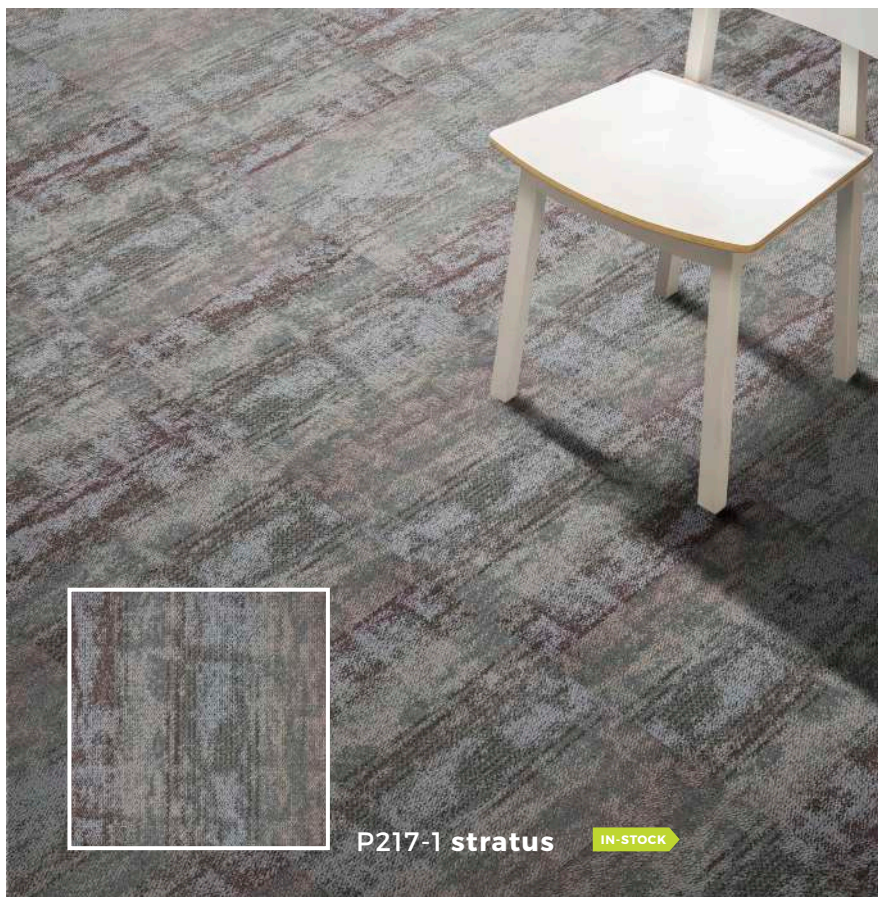

P217-1 stratus

IN-STOCK

HEATWAVE


CIRRUS

Fibre	Resillia Nylon Type 6
Construction	Multi-level loop
Pile Weight	21oz/yd ² or 712g/m ²
Standard Size	50cmx50cm





AMAZONPRIMO[®]
contract carpet tiles

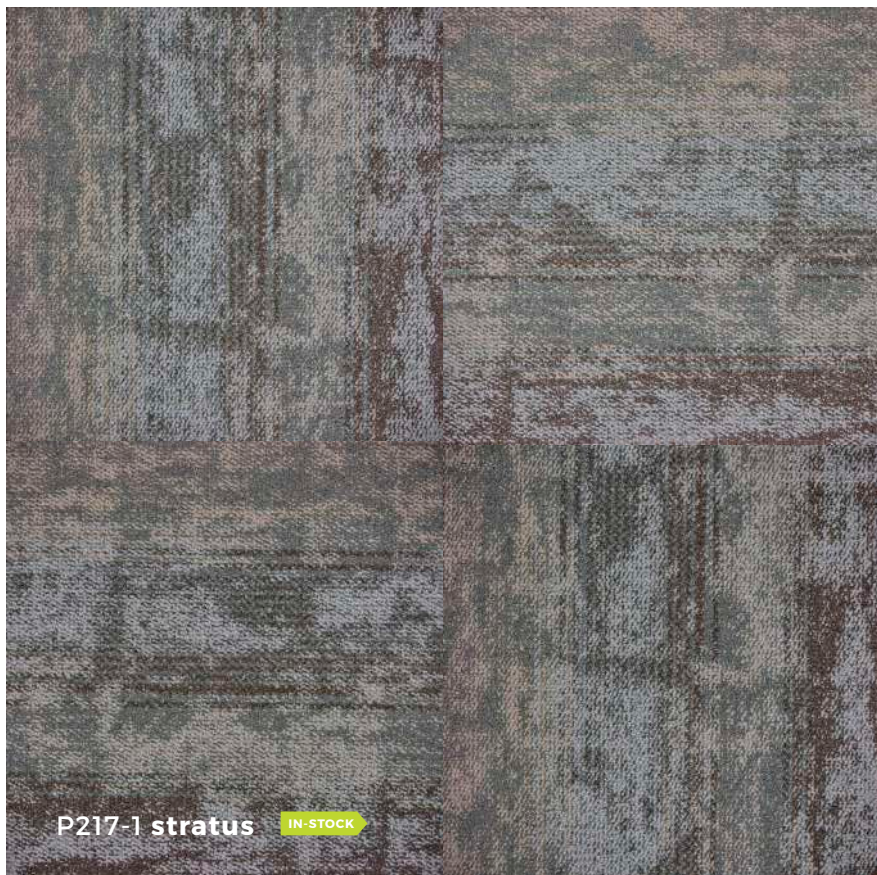

P217-1 stratus **IN-STOCK**

HEATWAVE

CIRRUS

Fibre	Resillia Nylon Type 6
Construction	Multi-level loop
Pile Weight	21oz/yd ² or 712g/m ²
Standard Size	50cmx50cm





AMAZONPRIMO[®]
contract carpet tiles



P217-1 stratus **IN-STOCK**

HEATWAVE

CIRRUS

Fibre	Resillia Nylon Type 6
Construction	Multi-level loop
Pile Weight	21oz/yd ² or 712g/m ²
Standard Size	50cmx50cm



HEATWAVE

CIRRUS

PRODUCT SPECIFICATION

Construction	Multi-level loop
Fibre	Resillia Nylon Type 6
Dye Method	Solution Dyed
Pile Weight	21oz/yd ² or 712g/m ²
Pile Height	2.5mm-6mm (+0.5mm)
Total Height	8.0mm
Gauge	1/10"
Backing	SynthBack™
No. of Tiles/Box	20 (5m ²)
Standard Size	50cmx50cm
Classification	Heavy Commercial
Recommended Installation	Brick, Ashlar & Quarter Turn



ENVIRONMENTAL SPECIFICATION

Total Recycled Content	30% post-consumer recycled material
Indoor Air Quality	CRI Green Label PLUS Greenguard
End-of-life Recycling	ReLoop Initiative
Environmental Quality System	ISO14001:2004



PERFORMANCE SPECIFICATION

Flammability	ASTM D 2859-96 / FF 1-70 / 16 CFR 1630	Pass 8/8
Flooring Radiant Panel	ASTM E 648-15e1	2.3%
Static Propensity	AATCC 134-2011	0.3 kV
Color Fastness	AATCC 165	5 5
Stain Resistance	AATCC 175-2003	7
Sound Absorption	ASTM C423-09a	0.13 Sabins/ft ²
Dimensional Stability	ASTM D7570(AACHEN/ISO2551)	<0.15%
Smoke Density	ASTM E 662-15a	Ds(1.5)≤100 and Ds(4.0)≤200
Roll Chair	ITTS-205	3.0
Tuft Bind	ASTM D 1335	8.5lbs
Pilling & Fuzzing	ITTS 002	5/5



AMAZONPRIMO[®]
contract carpet tiles