



**AMAZONPRIMO<sup>®</sup>**  
contract carpet tiles




**SIRIM**  
Certified to: GB/T 2955 : 2005  
Certification No.: PC011916



**SIRIM**  
ECO-LABEL  
Low VOC  
Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212

# COLORBAND

100% Resilia Nylon 6 | Synth PVC Back™

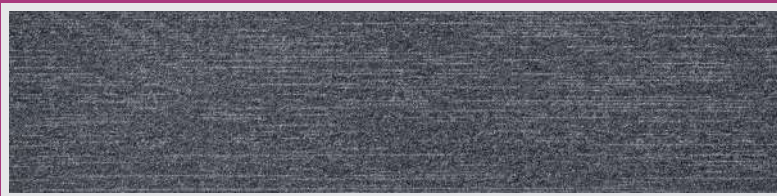


P8003-1 COLORBAND BASE

## Recommended Laying Patterns



Herringbone




Ashlar

## Product Specification

<b>Fibre</b>	100% Resilia Nylon 6
<b>Construction</b>	1/12" Multi-Level Loop
<b>Pile Weight</b>	610gm/m <sup>2</sup> or 18oz/yd <sup>2</sup>
<b>Pile Height</b>	2.5 - 3.5mm
<b>Total Thickness</b>	5.0 - 6.0mm
<b>Backing</b>	Synth PVC Back™

## Standard Size

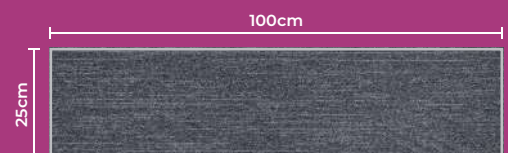

NY



COLORBAND



## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/12" Multi-Level Loop
<b>FIBRE</b>	100% Resilia Nylon 6
<b>PILE WEIGHT</b>	610gm/m <sup>2</sup> or 18oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	2.5 - 3.5mm
<b>TOTAL THICKNESS</b>	5.0 - 6.0mm
<b>BACKING</b>	Synth PVC Back™
<b>NO. OF TILES/ BOX</b>	20 pcs / 54sqft (5sqm)




**AMAZONPRIMO**<sup>®</sup>  
contract carpet tiles

# COLORBAND

100% Resilia Nylon 6 | Synth PVC Back™

**NY**

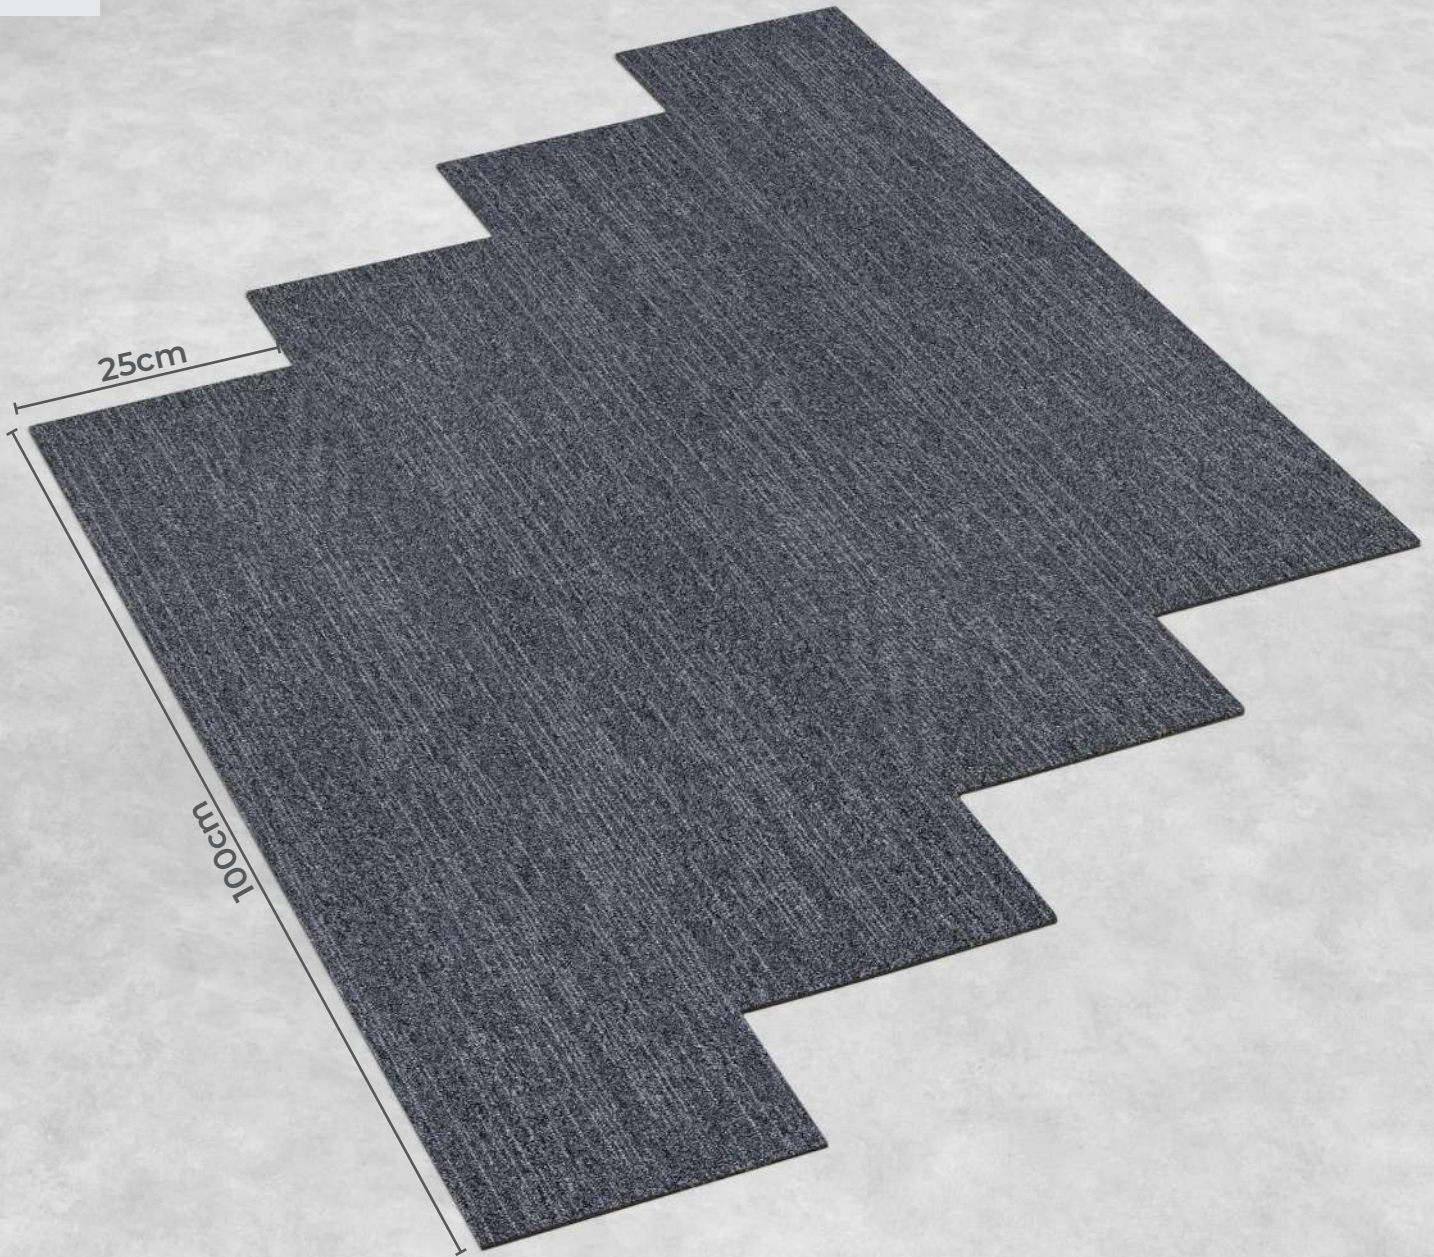

COLORBAND



P8003-1 **COLORBAND BASE**

## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/12" Multi-Level Loop
<b>FIBRE</b>	100% Resilia Nylon 6
<b>PILE WEIGHT</b>	610gm/m <sup>2</sup> or 18oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	2.5 - 3.5mm
<b>TOTAL THICKNESS</b>	5.0 - 6.0mm
<b>BACKING</b>	Synth PVC Back™
<b>NO. OF TILES/ BOX</b>	20 pcs / 54sqft (5sqm)



**AMAZONPRIMO®**  
contract carpet tiles

# COLORBAND

100% Resilia Nylon 6 | Synth PVC Back™

NY



COLORBAND



## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/12" Multi-Level Loop
<b>FIBRE</b>	100% Resilia Nylon 6
<b>PILE WEIGHT</b>	610gm/m <sup>2</sup> or 18oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	2.5 - 3.5mm
<b>TOTAL THICKNESS</b>	5.0 - 6.0mm
<b>BACKING</b>	Synth PVC Back™
<b>NO. OF TILES/ BOX</b>	20 pcs / 54sqft (5sqm)



**AMAZONPRIMO**<sup>®</sup>  
contract carpet tiles

# COLORBAND

100% Resilia Nylon 6 | Synth PVC Back™

## PRODUCT SPECIFICATION

<b>Construction</b>	Multi-level Loop
<b>Fiber</b>	100% Resilia Nylon 6
<b>Gauge</b>	1/12"
<b>Pile Weight</b>	610gm/m <sup>2</sup> or 18oz/yd <sup>2</sup>
<b>Pile Height</b>	2.5 - 3.5mm
<b>Total Thickness</b>	5.0 - 6.0mm
<b>Backing</b>	Synth PVC Back™
<b>Tile Size</b>	25cm x 100cm
<b>Package</b>	20pcs / 54sqft (5m <sup>2</sup> )

## ENVIRONMENTAL SPECIFICATION

<b>Sustainability</b>	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
-----------------------	--

## PERFORMANCE SPECIFICATION

<b>Static Electricity</b>	Permanent lifetime protection - less than <b>3.5kV</b>
<b>Lodging-Resistance</b>	Superior fibre resistance
<b>Wear Warranty</b>	Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years
<b>Dimensional Stability</b>	Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.
<b>Color Fastness to Rubbing</b>	GB/T3920-2008 Standard: >Grade 4 for dry rubbing >Grade 3 for wet rubbing



Certified to: QB1 2755:2005  
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212



PRODUCT CERTIFIED FOR  
ENVIRONMENTAL SENSITIVE  
USGBC/CES  
GREENGUARD  
UL 2898



Green Label  
+PLUS  
Indoor Air Quality  
Accreditation Program  
carpet-n6.org



**RESILIA**  
NYLON