



AMAZONPRIMO[®]
contract carpet tiles




SIRIM
Certified to: GB/T 2955 : 2005
Certification No.: PC011916



SIRIM
ECO-LABEL
Low VOC
Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212

COLORBAND

100% Resilia Nylon 6 | Synth PVC Back™

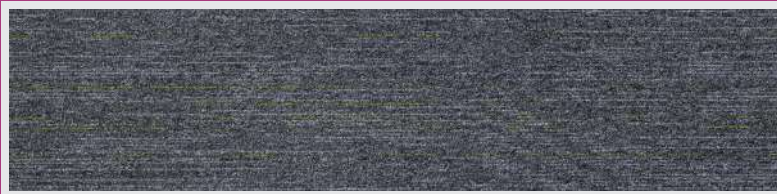


P8003-3 COLORBAND LIME

Recommended Laying Patterns



Herringbone




Ashlar

Product Specification

Fibre	100% Resilia Nylon 6
Construction	1/12" Multi-Level Loop
Pile Weight	610gm/m ² or 18oz/yd ²
Pile Height	2.5 - 3.5mm
Total Thickness	5.0 - 6.0mm
Backing	Synth PVC Back™

Standard Size

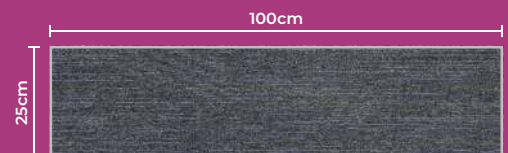

NY



Herringbone



COLORBAND



P8003-3 **COLORBAND LIME**

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	610gm/m ² or 18oz/yd ²
PILE HEIGHT	2.5 - 3.5mm
TOTAL THICKNESS	5.0 - 6.0mm
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)




AMAZONPRIMO[®]
contract carpet tiles

COLORBAND

100% Resilia Nylon 6 | Synth PVC Back™

NY

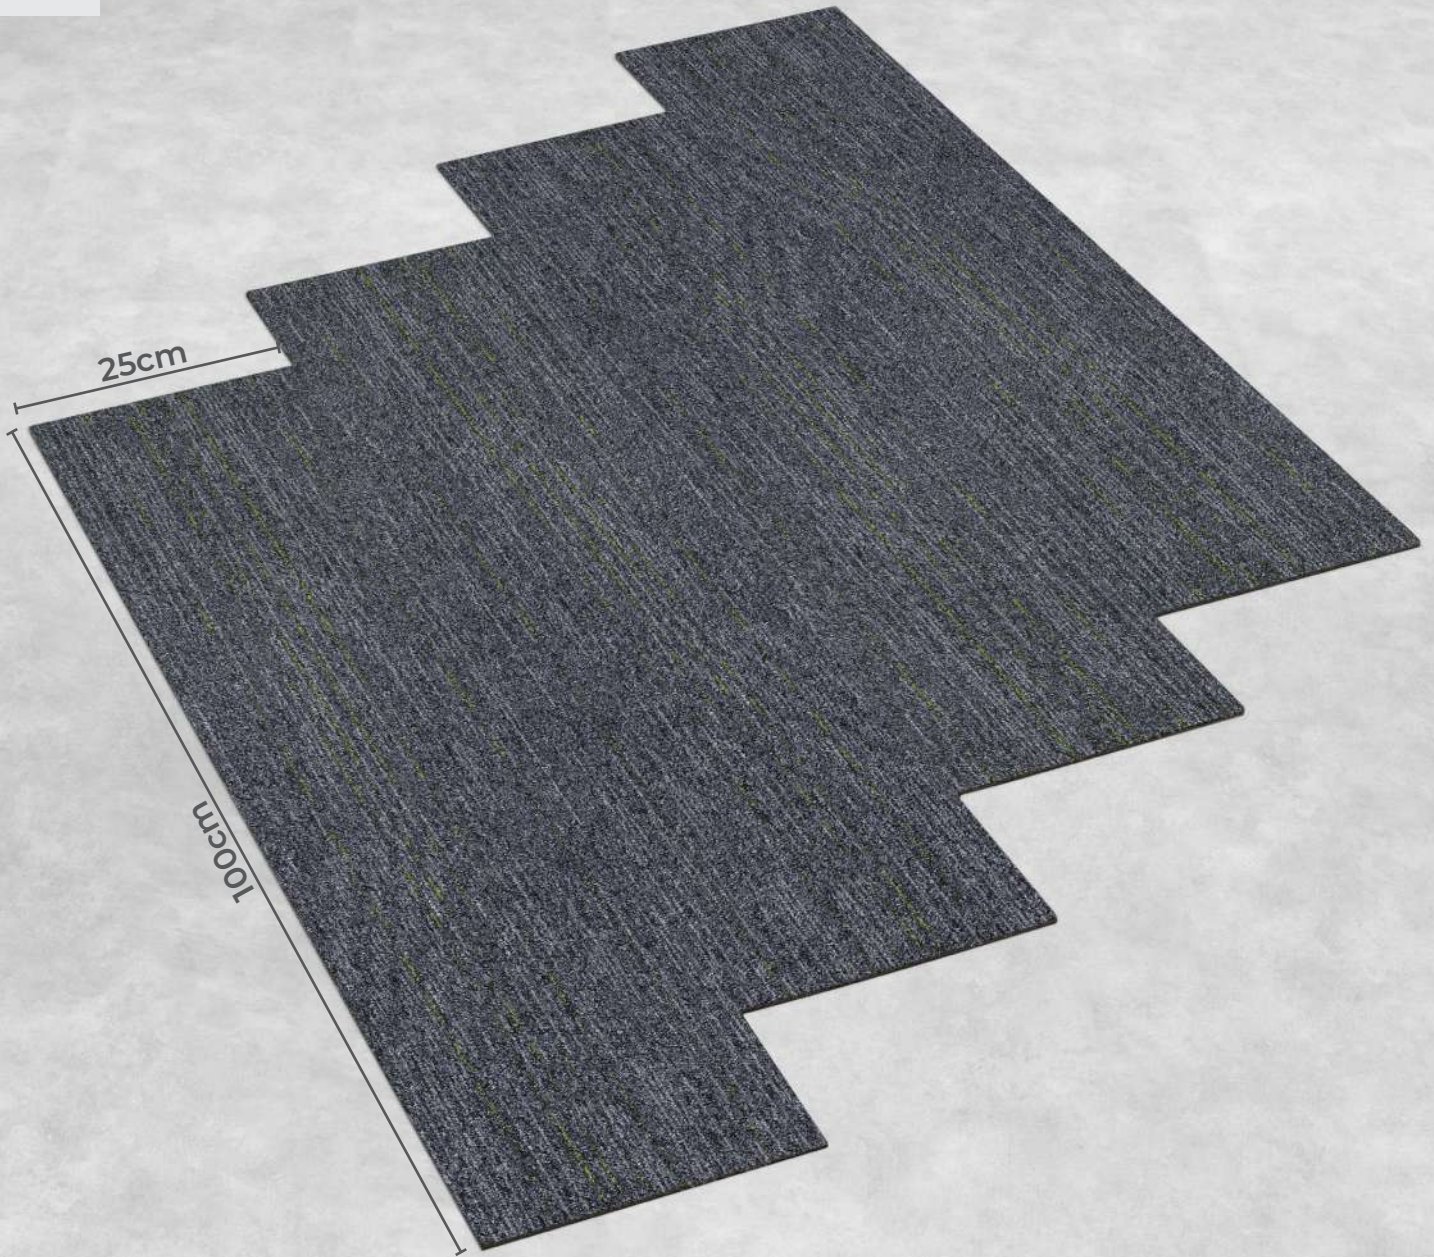

COLORBAND



P8003-3 **COLORBAND LIME**

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	610gm/m ² or 18oz/yd ²
PILE HEIGHT	2.5 - 3.5mm
TOTAL THICKNESS	5.0 - 6.0mm
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)



AMAZONPRIMO®
contract carpet tiles

COLORBAND

100% Resilia Nylon 6 | Synth PVC Back™

NY



COLORBAND



PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	610gm/m ² or 18oz/yd ²
PILE HEIGHT	2.5 - 3.5mm
TOTAL THICKNESS	5.0 - 6.0mm
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)



AMAZONPRIMO[®]
contract carpet tiles

COLORBAND

100% Resilia Nylon 6 | Synth PVC Back™

PRODUCT SPECIFICATION

Construction	Multi-level Loop
Fiber	100% Resilia Nylon 6
Gauge	1/12"
Pile Weight	610gm/m ² or 18oz/yd ²
Pile Height	2.5 - 3.5mm
Total Thickness	5.0 - 6.0mm
Backing	Synth PVC Back™
Tile Size	25cm x 100cm
Package	20pcs / 54sqft (5m ²)

ENVIRONMENTAL SPECIFICATION

Sustainability	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
-----------------------	--

PERFORMANCE SPECIFICATION

Static Electricity	Permanent lifetime protection - less than 3.5kV
Lodging-Resistance	Superior fibre resistance
Wear Warranty	Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years
Dimensional Stability	Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.
Color Fastness to Rubbing	GB/T3920-2008 Standard: >Grade 4 for dry rubbing >Grade 3 for wet rubbing



Certified to: QB1 2755:2005
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212



PRODUCT CERTIFIED FOR
ENVIRONMENTAL SENSITIVE
USGBC/CES
GREENGUARD
UL 2898



Green Label
+PLUS
Indoor Air Quality
Advanced Testing Program
carpet-nab.org



RESILIA
NYLON