



**AMAZONPRIMO<sup>®</sup>**  
contract carpet tiles




**SIRIM**  
Certified to : GB/T 2755 : 2005  
Certification No. : PC011916



**SIRIM**  
ECOLABEL  
Low VOC  
Certified to : SIRIM ECO 035 : 2012  
Certification No. : EL000212


# RISE & SHINE

100% Resilia Nylon 6 | Synth PVC Back™




P8005-1  
**RISE STONE**


## Recommended Laying Patterns



Quarter Turn



Ashlar




Brick



## Product Specification

<b>Fibre</b>	100% Resilia Nylon 6
<b>Construction</b>	1/12" Multi-Level Loop
<b>Pile Weight</b>	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>Pile Height</b>	3.0 - 5.5mm
<b>Total Thickness</b>	5.0 - 6.0mm
<b>Backing</b>	Synth PVC Back™

## Standard Size



NY



P8005-01  
**RISE STONE**

## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/12" Multi-Level Loop
<b>FIBRE</b>	100% Resilia Nylon 6
<b>PILE WEIGHT</b>	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	3.0 - 5.5mm
<b>TOTAL THICKNESS</b>	5.0 - 6.0mm
<b>BACKING</b>	Synth PVC Back™
<b>NO. OF TILES/ BOX</b>	20 pcs / 54sqft (5sqm)




**AMAZONPRIMO®**  
contract carpet tiles


# RISE & SHINE

100% Resilia Nylon 6 | Synth PVC Back™

NY

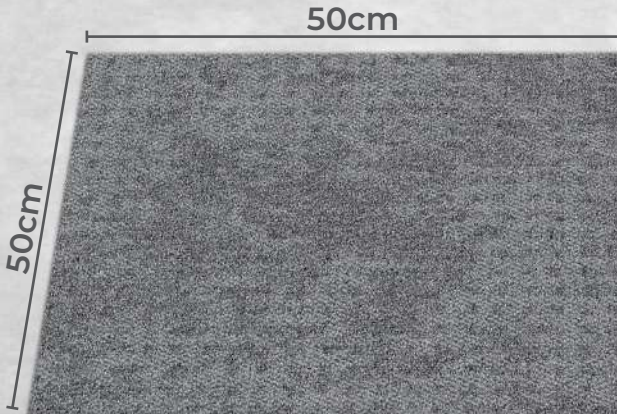

RISE & SHINE



P8005-01  
**RISE STONE**

## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/12" Multi-Level Loop
<b>FIBRE</b>	100% Resilia Nylon 6
<b>PILE WEIGHT</b>	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	3.0 - 5.5mm
<b>TOTAL THICKNESS</b>	5.0 - 6.0mm
<b>BACKING</b>	Synth PVC Back™
<b>NO. OF TILES/ BOX</b>	20 pcs / 54sqft (5sqm)



**AMAZONPRIMO®**  
contract carpet tiles

# RISE & SHINE

100% Resilia Nylon 6 | Synth PVC Back™

## PRODUCT SPECIFICATION

<b>Construction</b>	Multi-level Loop
<b>Fiber</b>	100% Resilia Nylon 6
<b>Gauge</b>	1/12"
<b>Pile Weight</b>	750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>Pile Height</b>	3.0 - 5.5mm
<b>Total Thickness</b>	5.0 - 6.0mm
<b>Backing</b>	Synth PVC Back™
<b>Tile Size</b>	50cm x 50cm
<b>Package</b>	20pcs / 54sqft (5m <sup>2</sup> )

## ENVIRONMENTAL SPECIFICATION

<b>Sustainability</b>	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
-----------------------	--

## PERFORMANCE SPECIFICATION

<b>Flammability</b>	Pass GB 8624-2012 Pass GB/T 14768-93
<b>Static Electricity</b>	Pass AATCC-134 Pass GB/T 18044-2000
<b>Smoke Density</b>	Pass ASTM-E-662 < =450 DMC Pass GB/T 8624-2012
<b>Color Fastness</b>	Pass AATCC-165
<b>Tensile Strength Test</b>	Pass ISO13934-1 Warp 3112.9
<b>Antimicrobial</b>	Pass AATCC TM 174



Certified to: QB1 2735:2005  
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212



PRODUCT CERTIFIED FOR  
ENVIRONMENTAL SENSITIVE  
USGBC/CES  
GREENGUARD  
UL 2898



GREEN LABEL  
+PLUS  
Indoor Air Quality  
Associated Testing Program  
CRI 1001-1001-010



**RESILIA**  
NYLON