



**AMAZONPRIMO<sup>®</sup>**  
contract carpet tiles




**SIRIM**  
Certified to : GB/T 2755 : 2005  
Certification No. : PC011916



**SIRIM**  
ECOLABEL  
Low VOC  
Certified to : SIRIM ECO 035 : 2012  
Certification No. : EL000212


# RISE & SHINE

100% Resilia Nylon 6 | Synth PVC Back™




P8005-6  
**RISE KHAKI**


## Recommended Laying Patterns



Quarter Turn



Ashlar




Brick



## Product Specification

|                        |  |
|------------------------|--|
| <b>Fibre</b>           | 100% Resilia Nylon 6                         |
| <b>Construction</b>    | 1/12" Multi-Level Loop                       |
| <b>Pile Weight</b>     | 750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup> |
| <b>Pile Height</b>     | 3.0 - 5.5mm                                  |
| <b>Total Thickness</b> | 5.0 - 6.0mm                                  |
| <b>Backing</b>         | Synth PVC Back™                              |

## Standard Size



NY




P8005-06  
**RISE KHAKI**


## PRODUCT SPECIFICATION

|                          |  |
|--------------------------|--|
| <b>CONSTRUCTION</b>      | 1/12" Multi-Level Loop                       |
| <b>FIBRE</b>             | 100% Resilia Nylon 6                         |
| <b>PILE WEIGHT</b>       | 750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup> |
| <b>PILE HEIGHT</b>       | 3.0 - 5.5mm                                  |
| <b>TOTAL THICKNESS</b>   | 5.0 - 6.0mm                                  |
| <b>BACKING</b>           | Synth PVC Back™                              |
| <b>NO. OF TILES/ BOX</b> | 20 pcs / 54sqft (5sqm)                       |

NY

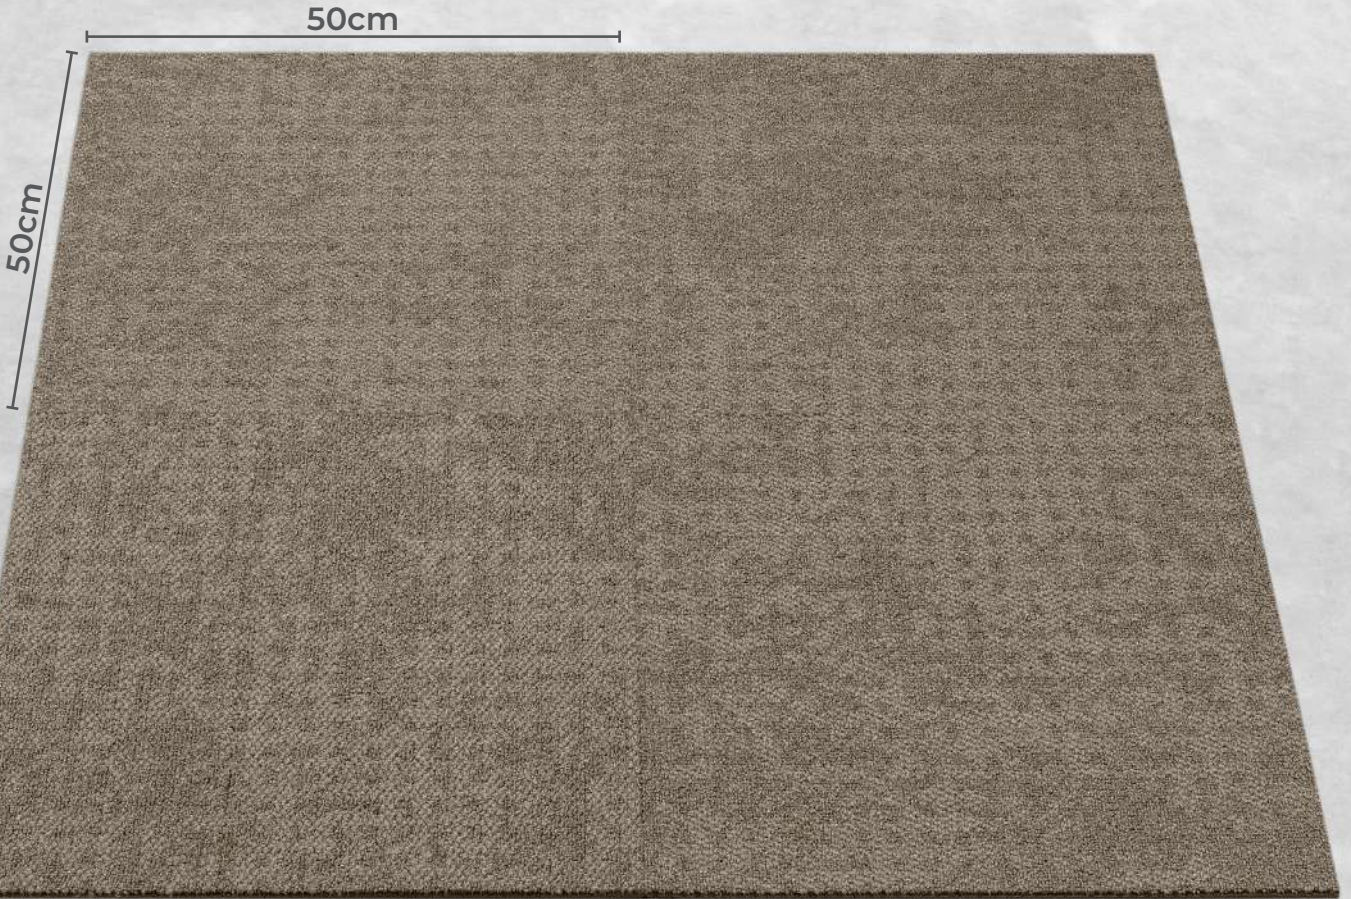

RISE & SHINE



P8005-06  
**RISE KHAKI**

## PRODUCT SPECIFICATION

|                          |  |
|--------------------------|--|
| <b>CONSTRUCTION</b>      | 1/12" Multi-Level Loop                       |
| <b>FIBRE</b>             | 100% Resilia Nylon 6                         |
| <b>PILE WEIGHT</b>       | 750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup> |
| <b>PILE HEIGHT</b>       | 3.0 - 5.5mm                                  |
| <b>TOTAL THICKNESS</b>   | 5.0 - 6.0mm                                  |
| <b>BACKING</b>           | Synth PVC Back™                              |
| <b>NO. OF TILES/ BOX</b> | 20 pcs / 54sqft (5sqm)                       |



**AMAZONPRIMO®**  
contract carpet tiles

# RISE & SHINE

100% Resilia Nylon 6 | Synth PVC Back™

## PRODUCT SPECIFICATION

|                        |  |
|------------------------|--|
| <b>Construction</b>    | Multi-level Loop                             |
| <b>Fiber</b>           | 100% Resilia Nylon 6                         |
| <b>Gauge</b>           | 1/12"  |
| <b>Pile Weight</b>     | 750gm/m <sup>2</sup> or 22oz/yd <sup>2</sup> |
| <b>Pile Height</b>     | 3.0 - 5.5mm                                  |
| <b>Total Thickness</b> | 5.0 - 6.0mm                                  |
| <b>Backing</b>         | Synth PVC Back™                              |
| <b>Tile Size</b>       | 50cm x 50cm                                  |
| <b>Package</b>         | 20pcs / 54sqft (5m <sup>2</sup> )            |

## ENVIRONMENTAL SPECIFICATION

|                       |  |
|-----------------------|--|
| <b>Sustainability</b> | Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent. |
|-----------------------|--|

## PERFORMANCE SPECIFICATION

|                              |   |
|------------------------------|---|
| <b>Flammability</b>          | Pass GB 8624-2012<br>Pass GB/T 14768-93           |
| <b>Static Electricity</b>    | Pass AATCC-134<br>Pass GB/T 18044-2000            |
| <b>Smoke Density</b>         | Pass ASTM-E-662 < =450 DMC<br>Pass GB/T 8624-2012 |
| <b>Color Fastness</b>        | Pass AATCC-165                                    |
| <b>Tensile Strength Test</b> | Pass ISO13934-1<br>Warp 3112.9                    |
| <b>Antimicrobial</b>         | Pass AATCC TM 174                                 |



Certified to: QB1 2735:2005  
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212



PRODUCT CERTIFIED FOR  
ENVIRONMENTAL SENSITIVE  
USGBC/CES  
GREENGUARD  
UL 2898



GREEN LABEL  
+PLUS  
Indoor Air Quality  
Associated Testing Program  
CRI 1001-1001-010



**RESILIA**  
NYLON