



AMAZONPRIMO[®]
contract carpet tiles




SIRIM
Certified to: GB/T 2755 - 2005
Certification No.: PC011916



SIRIM
ECO-LABEL
Low VOC
Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212

GROVE

100% Resilia Nylon 6 | BioFlex Hush Cushion Back™

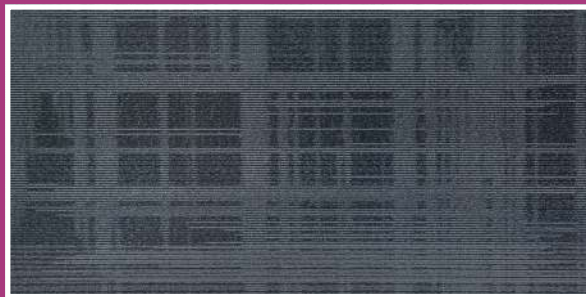


P8007-1 GROVE STEEL

Recommended Laying Patterns



Herringbone




Ashlar


Product Specification

Fibre	100% Resilia Nylon 6
Construction	1/12" (8+4) Multi-Level Loop
Pile Weight	810gm/m ² or 24oz/yd ²
Pile Height	3.0 - 5.5mm
Total Thickness	8.0mm
Backing	BioFlex Hush Cushion Back™

Standard Size

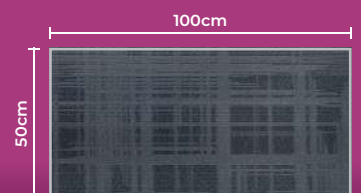

NY



Ashlar



P8007-1 **GROVE STEEL**

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" (8+4) Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.0 - 5.5mm
TOTAL THICKNESS	8.0mm
BACKING	BioFlex Hush Cushion Back™
NO. OF TILES/ BOX	10 pcs / 54sqft (5sqm)




AMAZONPRIMO[®]
contract carpet tiles

GROVE

100% Resilia Nylon 6 | BioFlex Hush Cushion Back™

NY

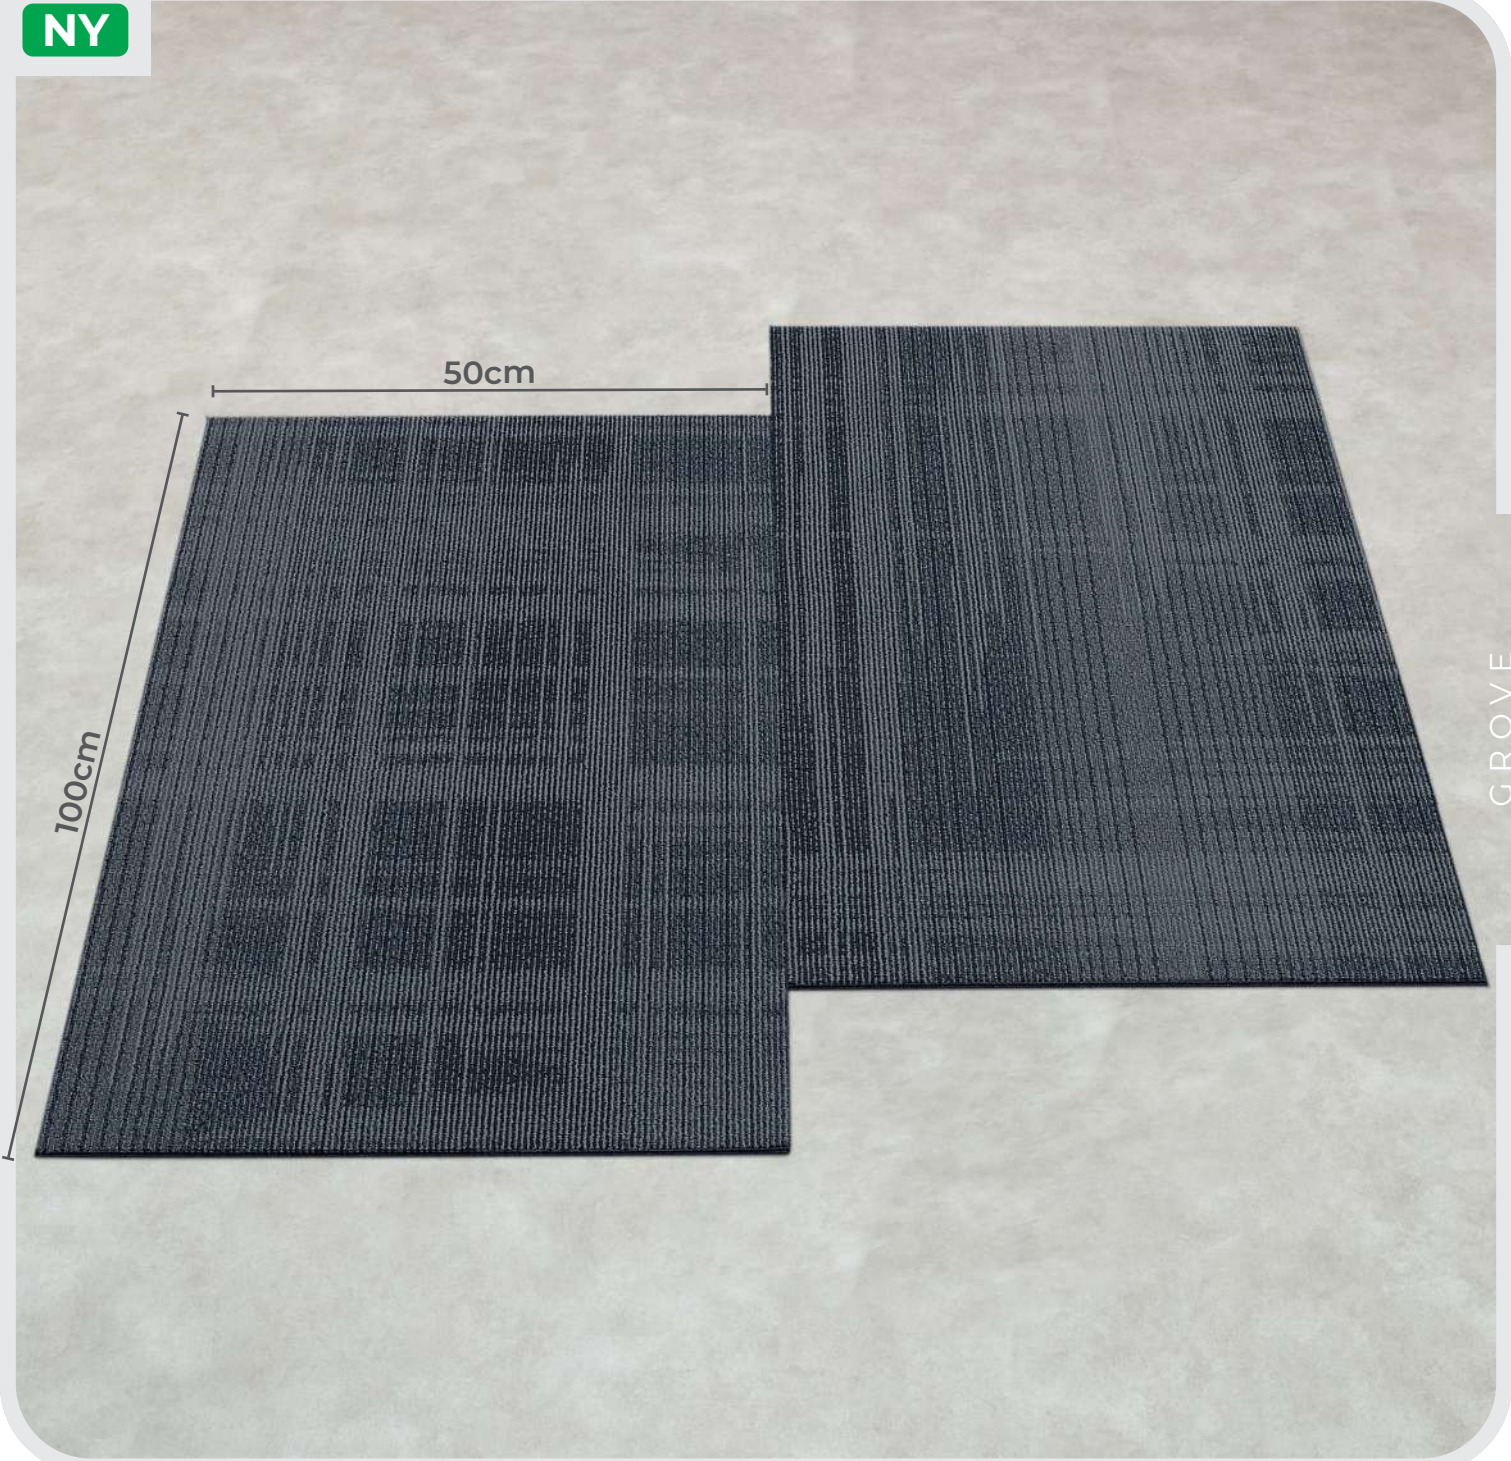

GROVE



P8007-1 **GROVE STEEL**

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" (8+4) Multi-Level Loop
FIBRE	100% Resilia Nylon 6
PILE WEIGHT	810gm/m ² or 24oz/yd ²
PILE HEIGHT	3.0 - 5.5mm
TOTAL THICKNESS	8.0mm
BACKING	BioFlex Hush Cushion Back™
NO. OF TILES/ BOX	10 pcs / 54sqft (5sqm)



AMAZONPRIMO[®]
contract carpet tiles

GROVE

100% Resilia Nylon 6 | Synth PVC Back™

PRODUCT SPECIFICATION

Construction	Multi-level Loop
Fiber	100% Resilia Nylon 6
Gauge	1/12" (8+4)
Pile Weight	810gm/m ² or 24oz/yd ²
Pile Height	3.0 - 5.5mm
Total Thickness	8.0mm
Backing	BioFlex Hush Cushion Back™
Tile Size	50cm x 100cm
Package	10pcs / 54sqft (5m ²)

ENVIRONMENTAL SPECIFICATION

Sustainability	30% post-consumer recycled material
Indoor Air Quality	CRI Green Label PLUS, Greenguard
End-of-life Recycling	Reloop Initiative
Environmental Quality System	ISO14001:2004

PERFORMANCE SPECIFICATION

Flammability	ASTM D 2859-96 / FF 1-70 / 16 CFR 1630 - Pass 8/8
Flooring Radiant Panel	ASTM E 648-15e1 - 2.3%
Static Propensity	AATCC 134-2011 - 0.3 kV
Color Fastness	AATCC 165 - 5 5
Stain Resistance	AATCC 175-2003 - 7
Sound Absorption	ASTM C423-09a - 0.13 Sabins/ft²
Dimensional Stability	ASTM D7570(AACHEN/ISO2551) - <0.15%
Tensile Strength Test	Pass ISO13934-1
Smoke Density	ASTM E 662-15a - Ds(1.5)≤100 and Ds(4.0)≤200
Roll Chair	ITTS-205 - 3.0
Tuft Bind	ASTM D 1335 - 8.5lbs
Pilling & Fuzzing	ITTS 002 - 5/5



Certified to: QB1 2735:2005
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212



RESILIA
NYLON