



**AMAZONPRIMO<sup>®</sup>**  
contract carpet tiles



**SIRIM**  
Certified to: GB/T 2755 : 2005  
Certification No.: PC011916



**SIRIM**  
ECO-LABEL  
Low VOC  
Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212

# GROVE

100% Resilia Nylon 6 | BioFlex Hush Cushion Back™




P8007-7 GROVE DENIM

## Recommended Laying Patterns



Herringbone




Ashlar


## Product Specification

<b>Fibre</b>	100% Resilia Nylon 6
<b>Construction</b>	1/12" (8+4) Multi-Level Loop
<b>Pile Weight</b>	810gm/m <sup>2</sup> or 24oz/yd <sup>2</sup>
<b>Pile Height</b>	3.0 - 5.5mm
<b>Total Thickness</b>	8.0mm
<b>Backing</b>	BioFlex Hush Cushion Back™

## Standard Size

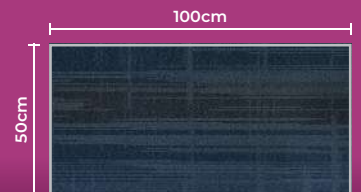

NY



Ashlar



P8007-7 GROVE DENIM

## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/12" (8+4) Multi-Level Loop
<b>FIBRE</b>	100% Resilia Nylon 6
<b>PILE WEIGHT</b>	810gm/m <sup>2</sup> or 24oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	3.0 - 5.5mm
<b>TOTAL THICKNESS</b>	8.0mm
<b>BACKING</b>	BioFlex Hush Cushion Back™
<b>NO. OF TILES/ BOX</b>	10 pcs / 54sqft (5sqm)



**AMAZONPRIMO**<sup>®</sup>  
contract carpet tiles

# GROVE

100% Resilia Nylon 6 | BioFlex Hush Cushion Back™

**NY**



## PRODUCT SPECIFICATION

<b>CONSTRUCTION</b>	1/12" (8+4) Multi-Level Loop
<b>FIBRE</b>	100% Resilia Nylon 6
<b>PILE WEIGHT</b>	810gm/m <sup>2</sup> or 24oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	3.0 - 5.5mm
<b>TOTAL THICKNESS</b>	8.0mm
<b>BACKING</b>	BioFlex Hush Cushion Back™
<b>NO. OF TILES/ BOX</b>	10 pcs / 54sqft (5sqm)



**AMAZONPRIMO<sup>®</sup>**  
contract carpet tiles

# GROVE

100% Resilia Nylon 6 | Synth PVC Back™

## PRODUCT SPECIFICATION

<b>Construction</b>	Multi-level Loop
<b>Fiber</b>	100% Resilia Nylon 6
<b>Gauge</b>	1/12" (8+4)
<b>Pile Weight</b>	810gm/m <sup>2</sup> or 24oz/yd <sup>2</sup>
<b>Pile Height</b>	3.0 - 5.5mm
<b>Total Thickness</b>	8.0mm
<b>Backing</b>	BioFlex Hush Cushion Back™
<b>Tile Size</b>	50cm x 100cm
<b>Package</b>	10pcs / 54sqft (5m <sup>2</sup> )

## ENVIRONMENTAL SPECIFICATION

<b>Sustainability</b>	30% post-consumer recycled material
<b>Indoor Air Quality</b>	CRI Green Label PLUS, Greenguard
<b>End-of-life Recycling</b>	Reloop Initiative
<b>Environmental Quality System</b>	ISO14001:2004

## PERFORMANCE SPECIFICATION

<b>Flammability</b>	ASTM D 2859-96 / FF 1-70 / 16 CFR 1630 - <b>Pass 8/8</b>
<b>Flooring Radiant Panel</b>	ASTM E 648-15e1 - <b>2.3%</b>
<b>Static Propensity</b>	AATCC 134-2011 - <b>0.3 kV</b>
<b>Color Fastness</b>	AATCC 165 - <b>5   5</b>
<b>Stain Resistance</b>	AATCC 175-2003 - <b>7</b>
<b>Sound Absorption</b>	ASTM C423-09a - <b>0.13 Sabins/ft<sup>2</sup></b>
<b>Dimensional Stability</b>	ASTM D7570(AACHEN/ISO2551) - <b>&lt;0.15%</b>
<b>Tensile Strength Test</b>	Pass ISO13934-1
<b>Smoke Density</b>	ASTM E 662-15a - <b>Ds(1.5)≤100 and Ds(4.0)≤200</b>
<b>Roll Chair</b>	ITTS-205 - <b>3.0</b>
<b>Tuft Bind</b>	ASTM D 1335 - <b>8.5lbs</b>
<b>Pilling &amp; Fuzzing</b>	ITTS 002 - <b>5/5</b>



Certified to: QB1 2735:2005  
Certification No.: PK011916



Certified to: SIRIM ECO 035: 2012  
Certification No.: EL000212



**RESILIA**  
NYLON