



AMAZONPRIMO[®]
contract carpet tiles




SIRIM
Certified to: GB/T 2755 : 2005
Certification No.: PC011916



SIRIM
ECO-LABEL
Low VOC
Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212


FAZE & MAZE

100% Resilia Nylon 6 Air Entangled | Synth PVC Back™




P8008-4
FAZE PITCH


Recommended Laying Patterns



Quarter Turn



Ashlar




Brick

Product Specification

Fibre	100% Resilia Nylon 6 Air Entangled
Construction	1/12" Multi-Level Loop
Pile Weight	710gm/m ² or 21oz/yd ²
Pile Height	3.0 - 4.0mm
Total Thickness	5.0 - 6.0mm
Backing	Synth PVC Back™

Standard Size








AMAZONPRIMO®
contract carpet tiles

FAZE & MAZE

100% Resilia Nylon 6 Air Entangled | Synth PVC Back™

NY

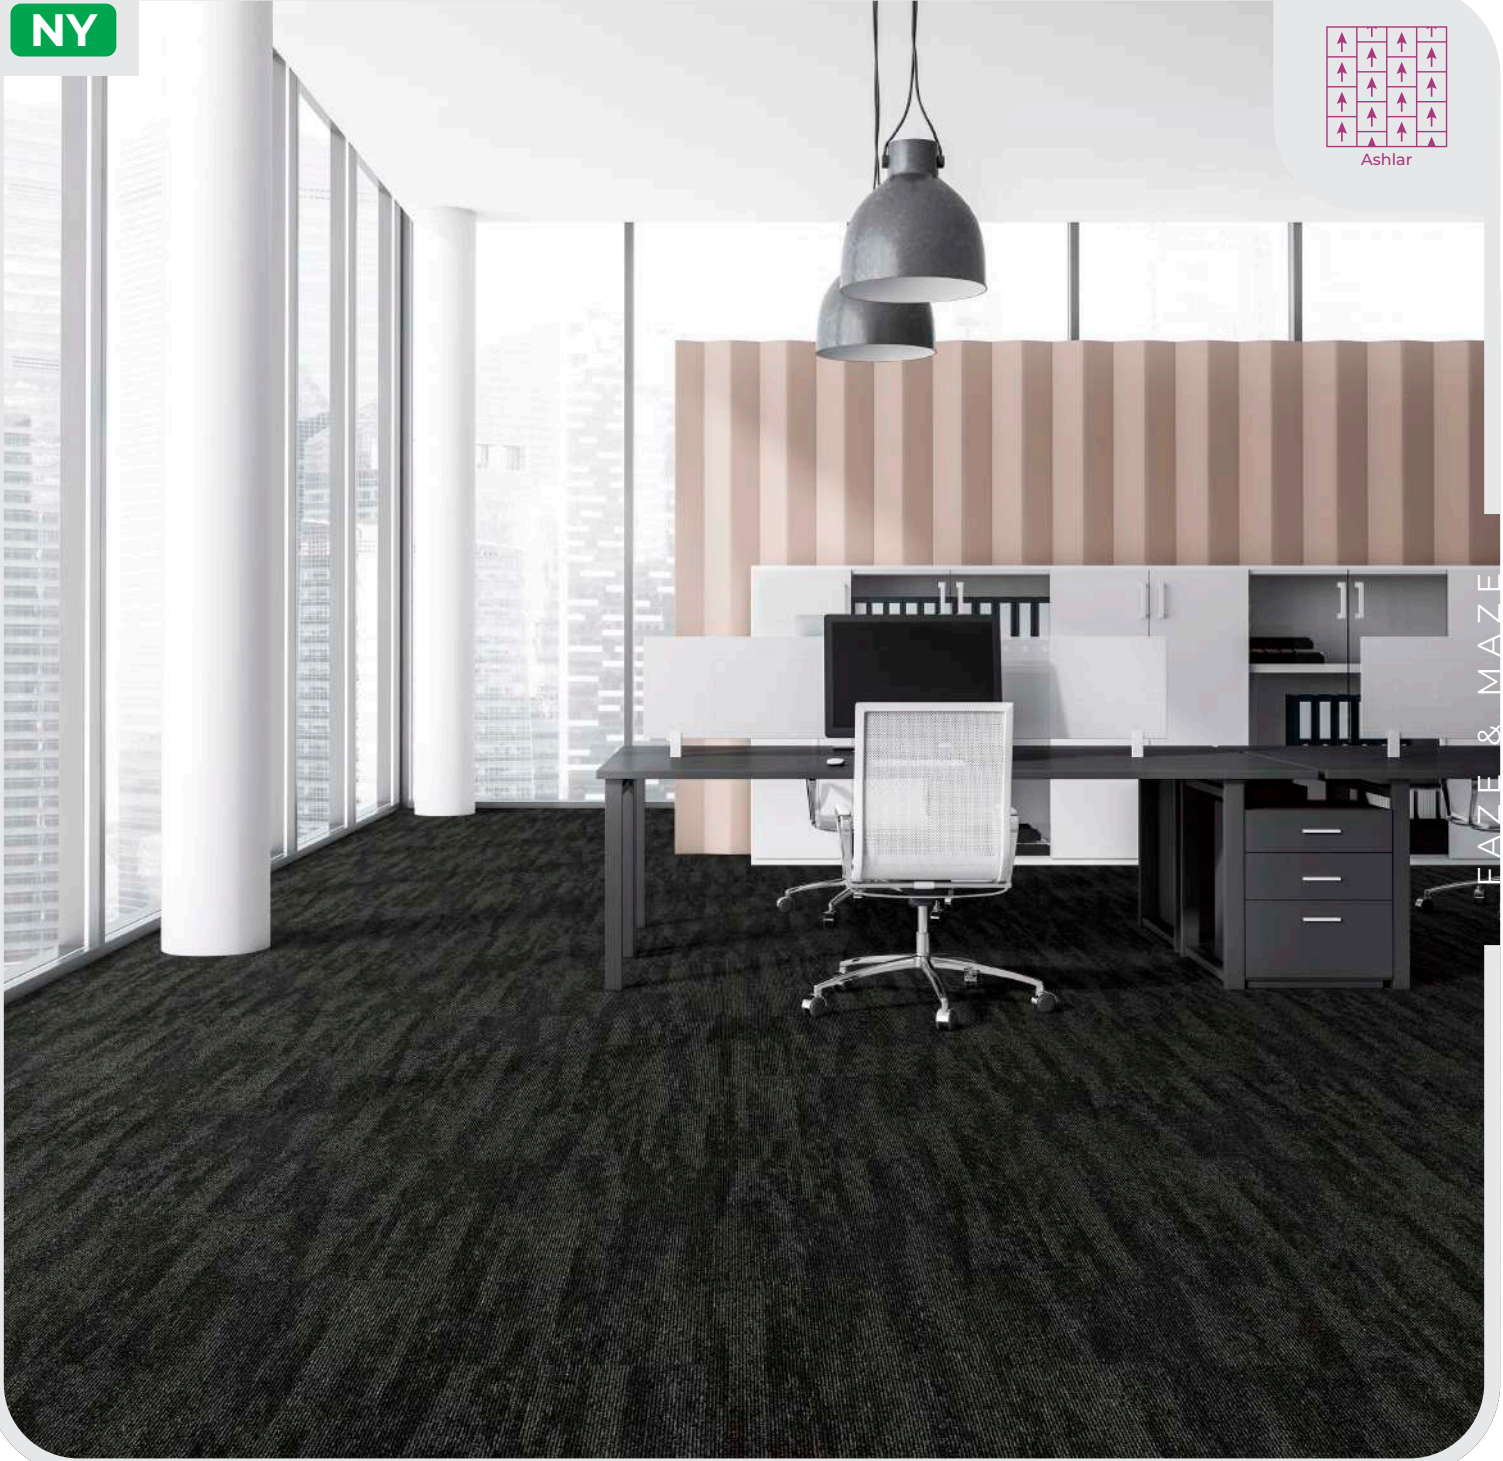

P8008-4
FAZE PITCH

PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-Level Loop
FIBRE	100% Resilia Nylon 6 Air Entangled
PILE WEIGHT	710gm/m ² or 21oz/yd ²
PILE HEIGHT	3.0 - 4.0mm
TOTAL THICKNESS	5.0 - 6.0mm
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)



AMAZONPRIMO®
contract carpet tiles

FAZE & MAZE

100% Resilia Nylon 6 Air Entangled | Synth PVC Back™

PRODUCT SPECIFICATION

Construction	Multi-level Loop
Fiber	100% Resilia Nylon 6 Air Entangled
Gauge	1/12"
Pile Weight	710gm/m ² or 21oz/yd ²
Pile Height	3.0 - 4.0mm
Total Thickness	5.0 - 6.0mm
Backing	Synth PVC Back™
Tile Size	50cm x 50cm
Package	20pcs / 54sqft (5m ²)

ENVIRONMENTAL SPECIFICATION

Sustainability	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
-----------------------	--

PERFORMANCE SPECIFICATION

Static Electricity	Permanent lifetime protection - less than 3.5kV
Lodging-Resistance	Superior fibre resistance
Wear Warranty	Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years
Dimensional Stability	Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.
Color Fastness to Rubbing	GB/T3920-2008 Standard: >Grade 4 for dry rubbing >Grade 3 for wet rubbing



Certified to: Q811 2735:2005
Certification No.: PK011916



Certified to: SIRIM ECO 035 : 2012
Certification No.: EL000212



PRODUCT CERTIFIED FOR
LOWER VOC EMISSIONS
(0.05)



Indoor Air Quality
Associated Testing Program
carpet-nab.org



RESILIA
NYLON